

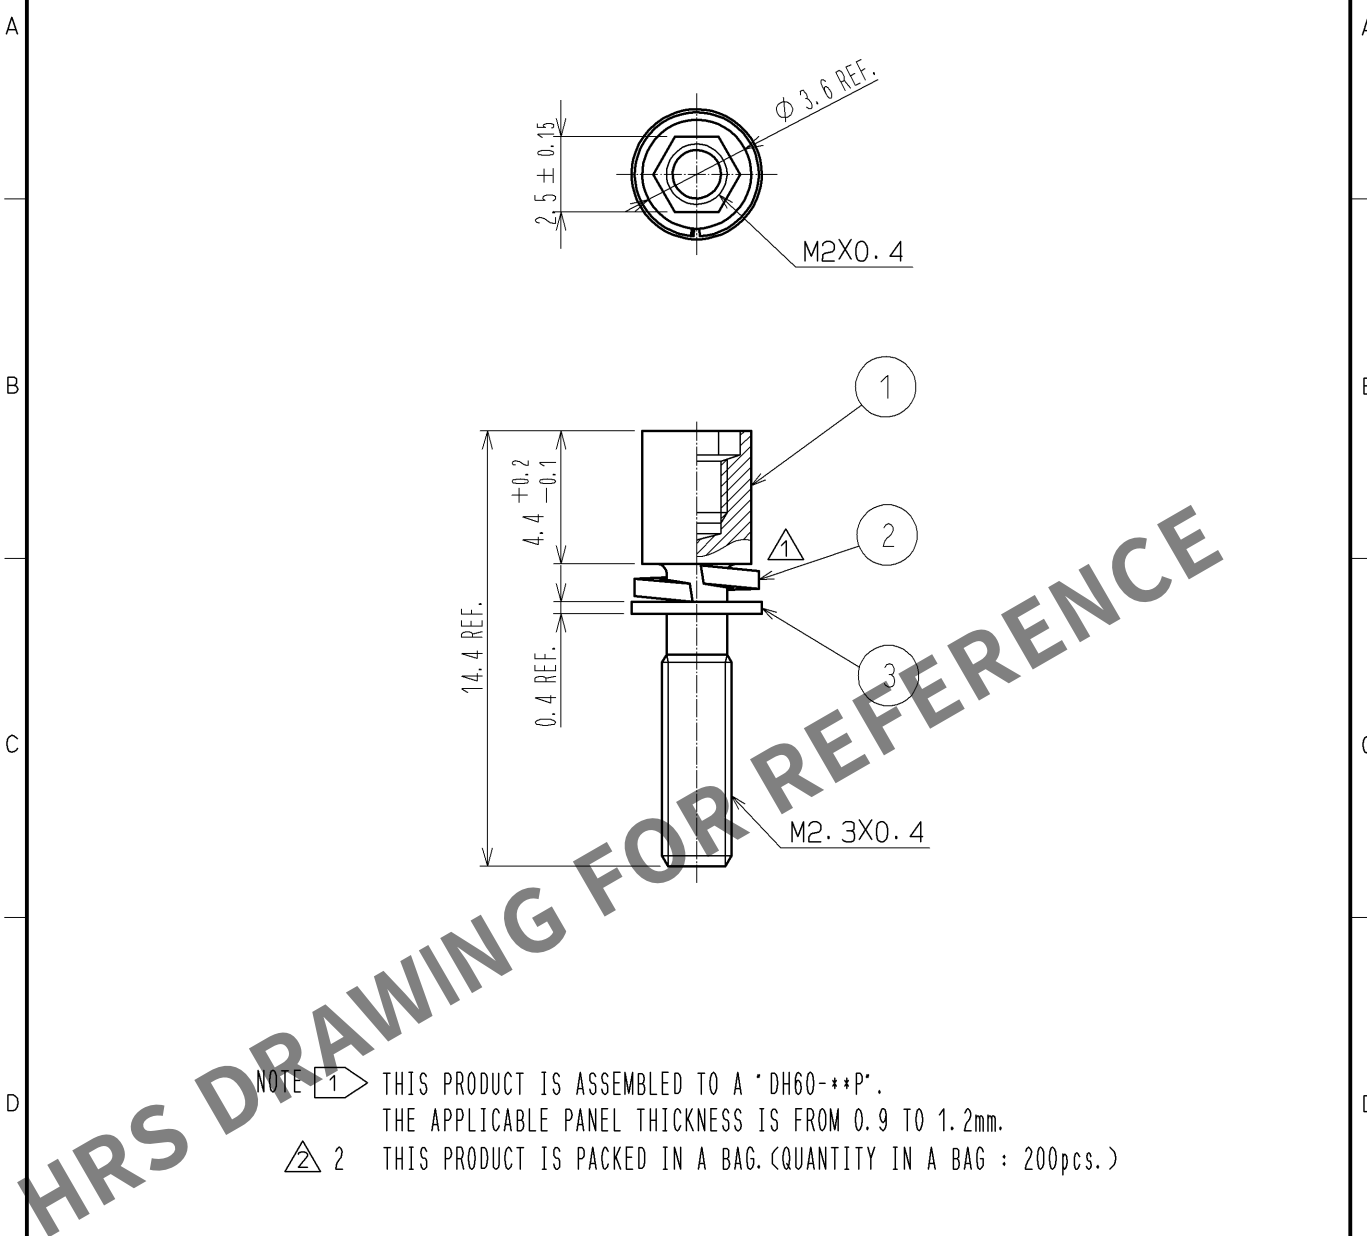


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

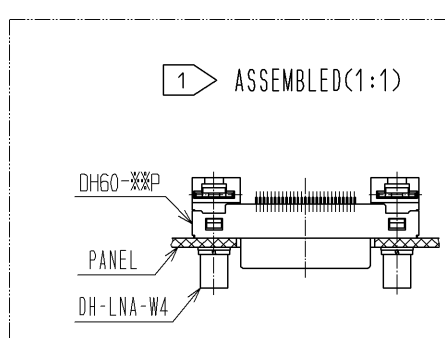

NOTE 1 THIS PRODUCT IS ASSEMBLED TO A "DH60-**P".
THE APPLICABLE PANEL THICKNESS IS FROM 0.9 TO 1.2mm.
2 THIS PRODUCT IS PACKED IN A BAG. (QUANTITY IN A BAG : 200pcs.)



				3	STEEL	OVER PLATING : NICKEL 5 μm MIN UNDER PLATING : COPPER 1 μm MIN		
1	STEEL	OVER PLATING : NICKEL 5 μm MIN UNDER PLATING : COPPER 1 μm MIN		2	STEEL	OVER PLATING : NICKEL 5 μm MIN UNDER PLATING : COPPER 1 μm MIN		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 4 : 1	 COUNT 1	DESCRIPTION OF REVISIONS DIS-E-003059		DESIGNED MO. SHIMOYAMA	CHECKED KN. ICHIKAWA	DATE 09. 12. 07
 HIROSE ELECTRIC CO., LTD.		APPROVED : AO. SUZUKI		09. 04. 27	DRAWING NO. EDC4-126896-00			
		CHECKED : MO. SHIMOYAMA		09. 04. 24	PART NO. DH-LNA-W4			
		DESIGNED : TS. ITO		09. 04. 24	CODE NO. CL244-0046-2-00			
		DRAWN : TS. ITO		09. 04. 24	 1/1			