



Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
PCK

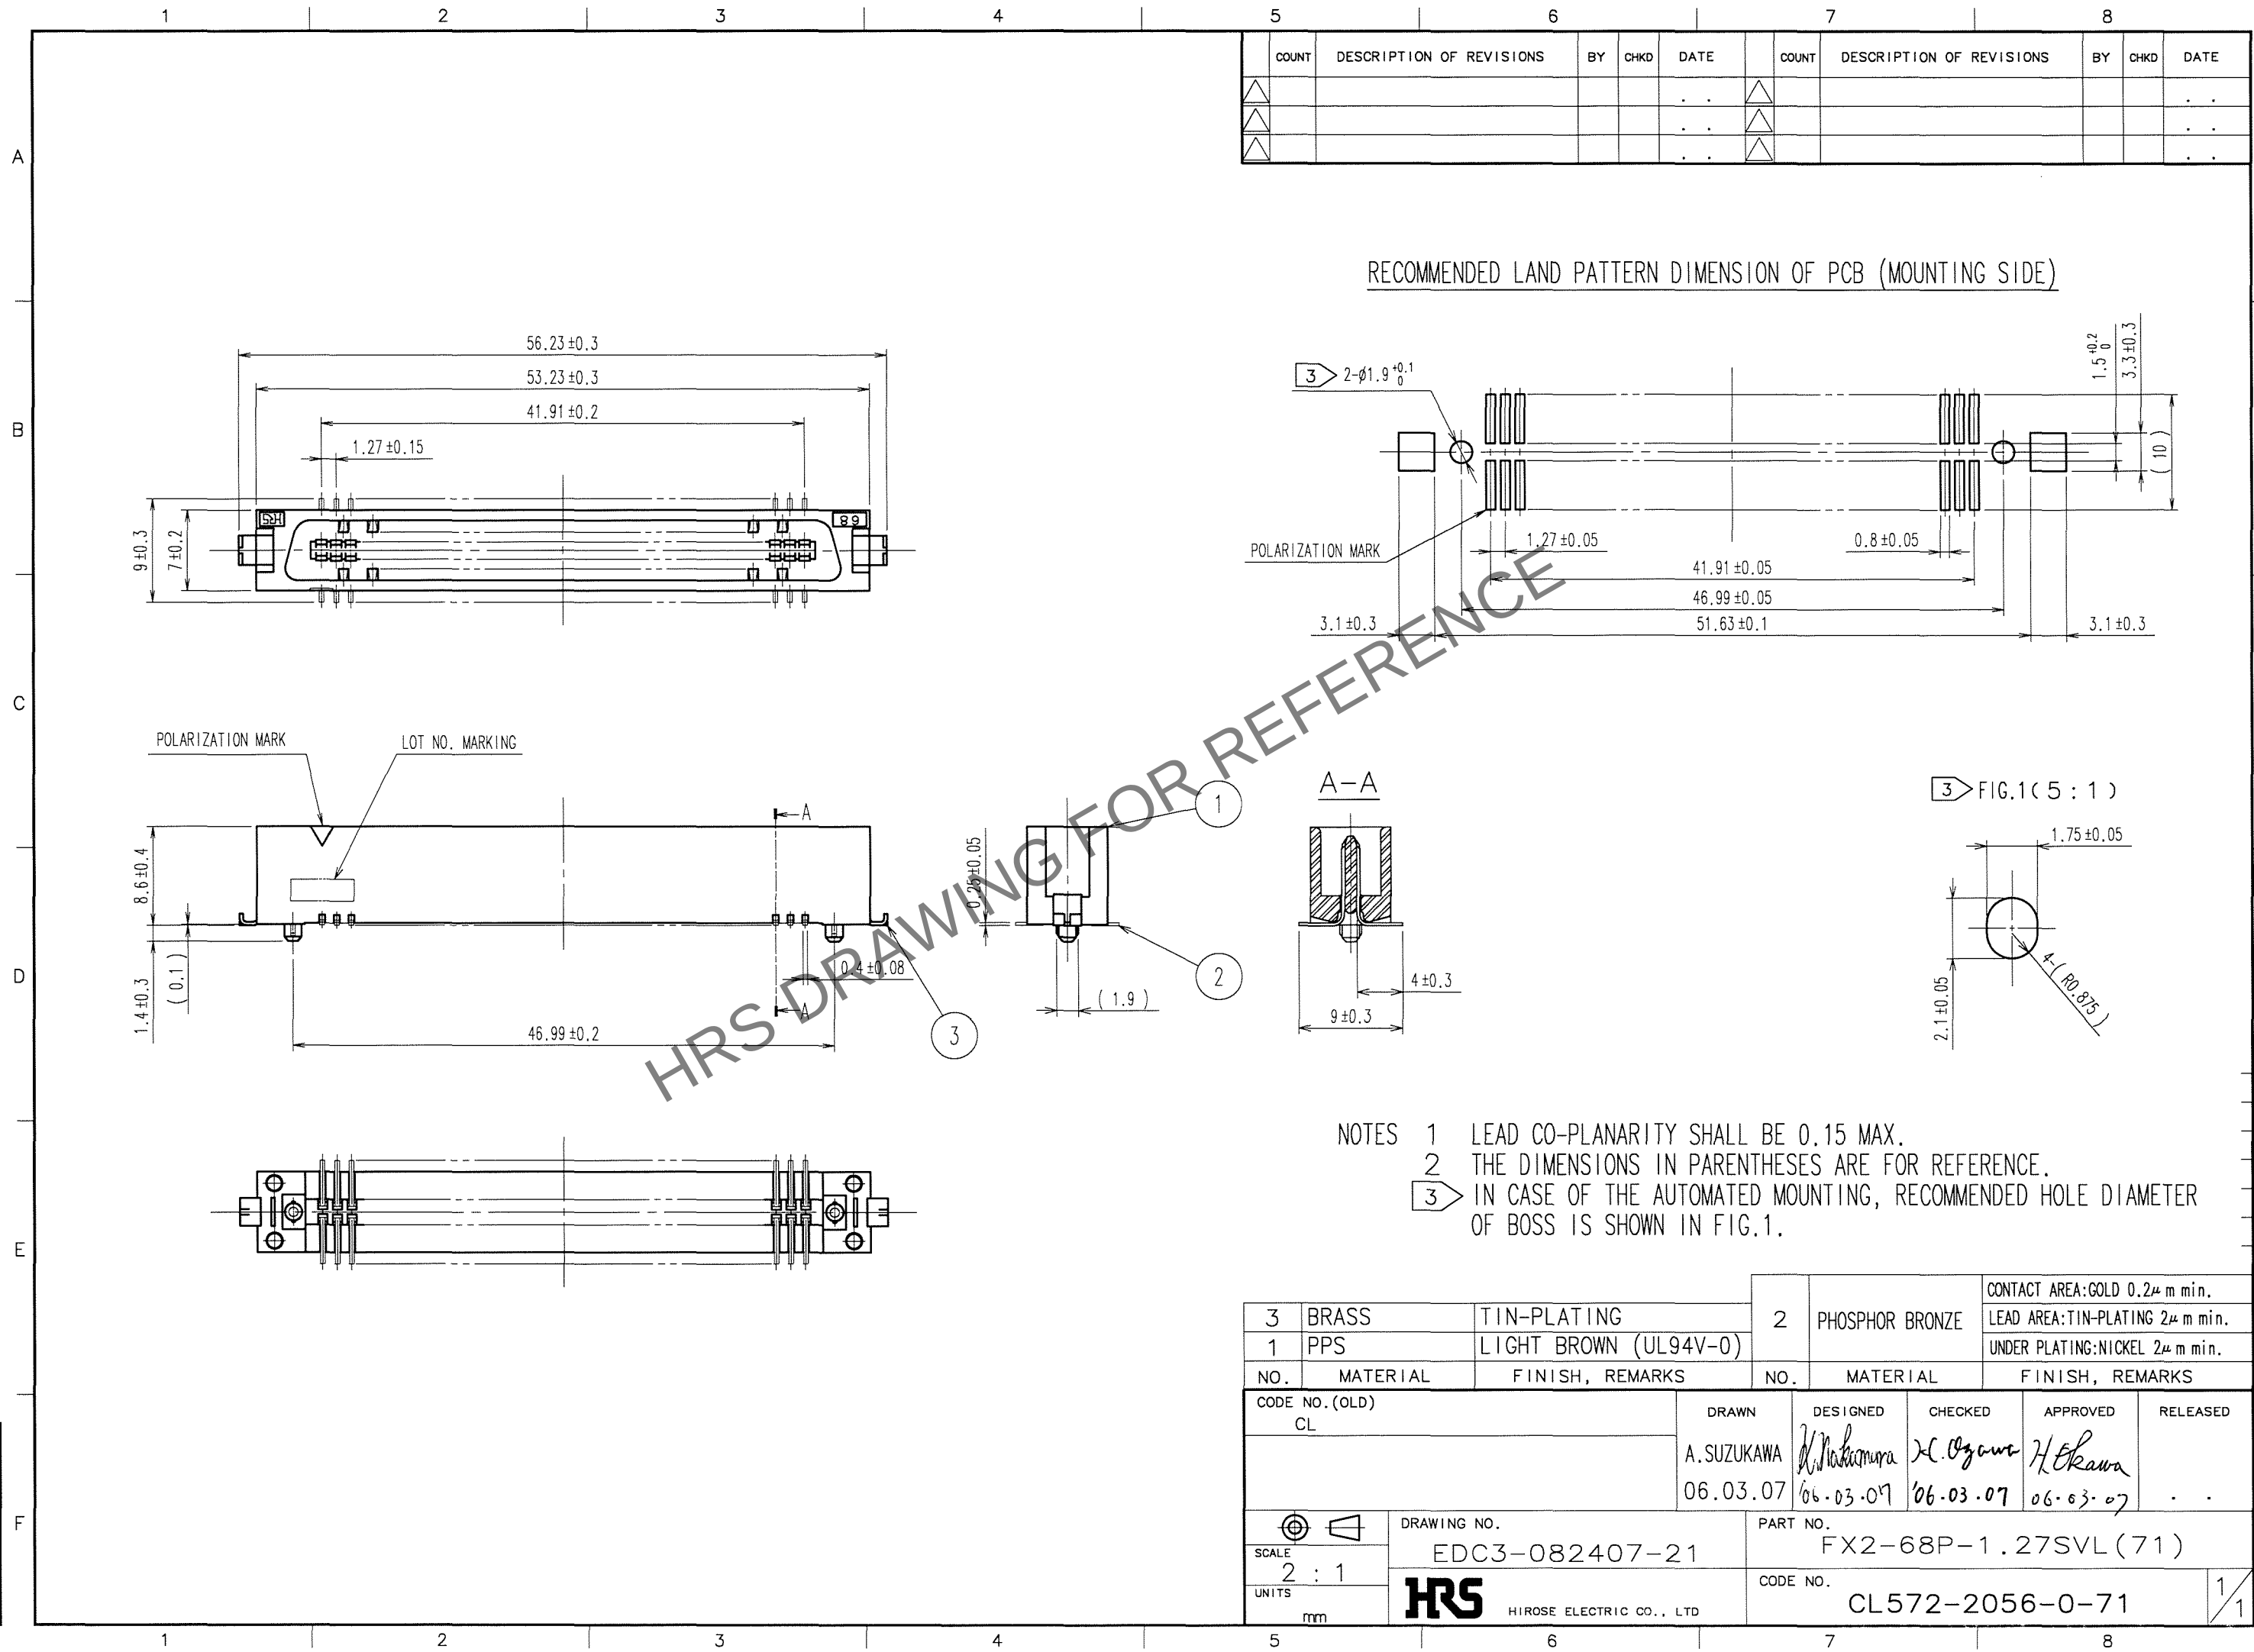


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				.	△				.
△				.	△				.
△				.	△				.

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

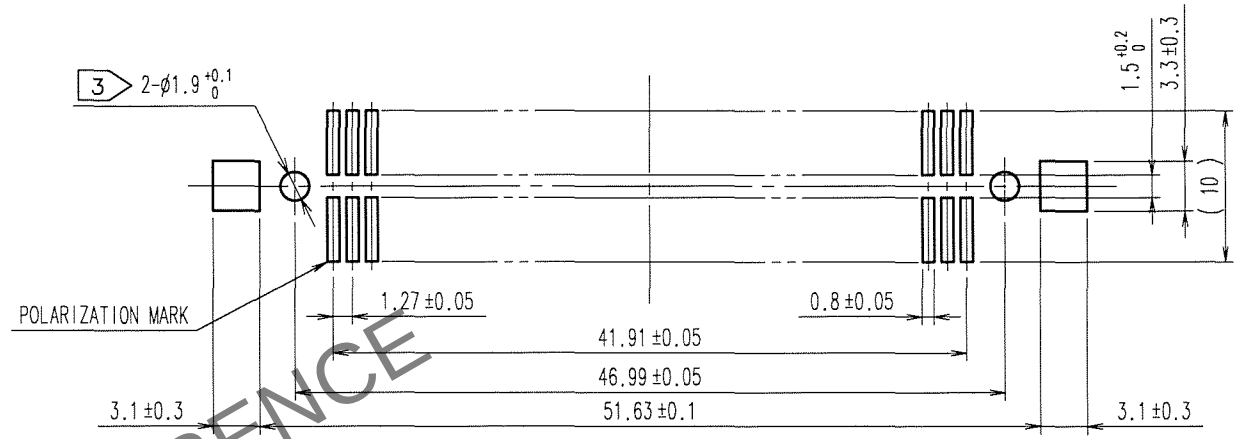

- NOTES
- 1 LEAD CO-PLANARITY SHALL BE 0.15 MAX.
 - 2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 3 IN CASE OF THE AUTOMATED MOUNTING, RECOMMENDED HOLE DIAMETER OF BOSS IS SHOWN IN FIG.1.

					CONTACT AREA:GOLD 0.2μ m min.		
3	BRASS	TIN-PLATING	2	PHOSPHOR BRONZE	LEAD AREA:TIN-PLATING 2μ m min.		
1	PPS	LIGHT BROWN (UL94V-0)			UNDER PLATING:NICKEL 2μ m min.		
NO.		MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL							
			A.SUZUKAWA	K.Nishimura	K.Ogawa	H.Okawa	
			06.03.07	06.03.07	06.03.07	06.03.07	.
		DRAWING NO.			PART NO.		
SCALE		EDC3-082407-21			FX2-68P-1.27SVL (71)		
2 : 1		 HIROSE ELECTRIC CO., LTD			CODE NO.		1/1
UNITS					CL572-2056-0-71		
mm							