



承认书

**RoHS
COMPLIANT**

产品型号	CSMCW7060F-701	客户料号	
产品名称	贴片共模电感	日期	2025/03/10

客 户 名 称 : _____
客 户 料 号 : _____
客 户 描 述 : _____
料 号 : CSMCW7060F-701
修 订 编 号 : 2025310Mon91047
日 期 : 2025/03/10
备 注 : STANDARD

供应商承认

制样	制作	测试	审核	核准	华锐达工程部 电子章
黄东林	包佳琪	包佳琪	甘元培	胡林立	
签章					

客户承认

采购	工程	品质

深 圳 市 华 锐 达 电 子 有 限 公 司

官网: www.coil-rida.com

电话: 0755-29485625

传真: 0755-29485623

邮箱: coilrida@coil-rida.com.cn

地 址 : 中国广东省深圳市宝安区石岩街道石龙社区金凯进工业区B栋2楼

TS16949 证书号: 0358772

ISO9001 证书号: 46912

		承认书		RoHS COMPLIANT
产品型号	CSMCW7060F-701	客户料号		
产品名称	贴片共模电感	日期	2025/03/10	
变更记录				
变更次数	更改项目	更改前的内容	更改后的内容	更改日期
客户确认		确认	检查	制图
		甘元培	包佳琪	黄东林




承认书


**RoHS
COMPLIANT**

产品型号	CSMCW7060F-701	客户料号	
产品名称	贴片共模电感	日期	2025/03/10


◆ 外形尺寸:(Unit: mm)



TOP VIEW



BOTTOM VIEW



SIDE VIEW

A	7.5±0.5
A1	7.5±0.5
B	6.0±0.5
C	3.8 Max
D	3.5Typ
E	1.5±0.2
F	1.5±0.2
G	1.7±0.2
XXX	701

◆ 编号系统:

CSMCW 7060 F - 701
1 2 3 4

1. 华锐达品名
2. 产品型号
3. F:黑盖白字 M:黄盖透明
4. 阻抗值 100=10Ω 101=100Ω 102=1000Ω


◆ 电气特性/ELECTRICAL CHARACTERISTIC:

Item	Z(Ω) 100MHz/0.1V		DCR (mΩ) Max.	Rated Current (A) Max	IR (mΩ) Min	Rated Volt. (V) Max
	Min	Typ				
CSMCW7060F	500	700	15.0	4.0	10.0	125

- ❖ Rated Current: Temp.rise 40°C Typ
- ❖ 测试仪器:
Z(Ω):HP4395A
RDC(Ω):CH502BC
Rated Current(A):CH1062A+CH1320
IR(MΩ):CH19073
Rated Voltage(V):CH9052

客户确认	核准	制表	制样
	甘元培	包佳琪	黄东林

		承认书		RoHS COMPLIANT	
产品型号		CSMCW7060F-701		客户料号	
产品名称		贴片共模电感		日期	
				2025/03/10	

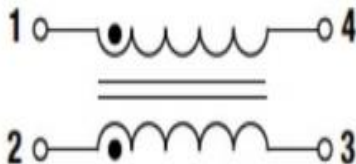


◆ 可靠性测试:

Operating Temperature	- 30 to + 100 °C (Contain Heating coil)
Appearance Inspection	No external defects by visual inspection
Terminal Strength	After soldering , between copper plaet and terminals of coils , push in two directions of X , Y with standing 10N(1.02kg) for10+/-2 sec. Terminal should not peel off. (Refer to figure at right)
Heat endurance of reflow soldering	Refer to figure
Insulating resistance	Over 100 MΩ at 100V D.C . between wire and core .
Dielectric Strength	Apply at 0.5KV 3mA for 1 minute between wire and core .
Temperature characteristics	Inductance coefficient (0~2,000) × 10 / °C (- 30 ~ + 100 °C)
Humidity characteristics	Inductance deviation within ± 10% , after 96 hours in 90~95% relative humidity at 40 ± 2 °C and 1 hours drying under normal condition .

A test is made under the above mentioned condition , and it is kept for 2 hours in the normal

IR Reflow profile

Temperature °C

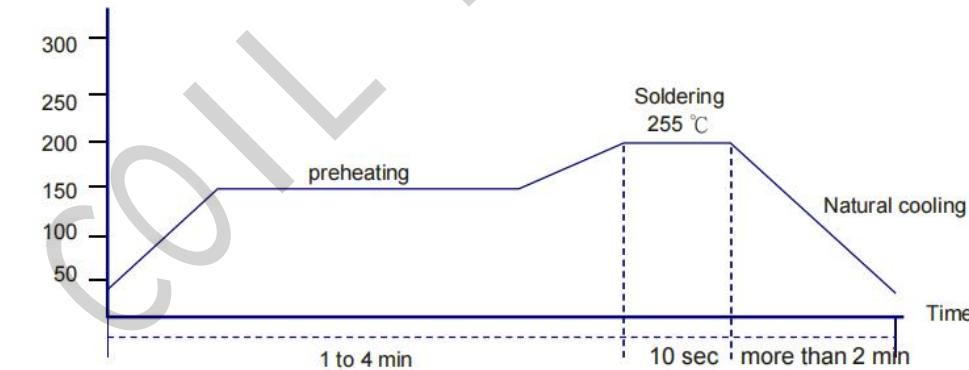


Time

Temperature and humidity . After that , no mechanical and electrical defect should be found .

客户确认	核准	制表	制样
	甘元培	包佳琪	黄东林

 COIL-RIDA 承认书 RoHS COMPLIANT			
产品型号	CSMCW7060F-701	客户料号	
产品名称	贴片共模电感	日期	2025/03/10

- ◆ 编带规格/
- ◆ TAPING SPECIFICATIONS:

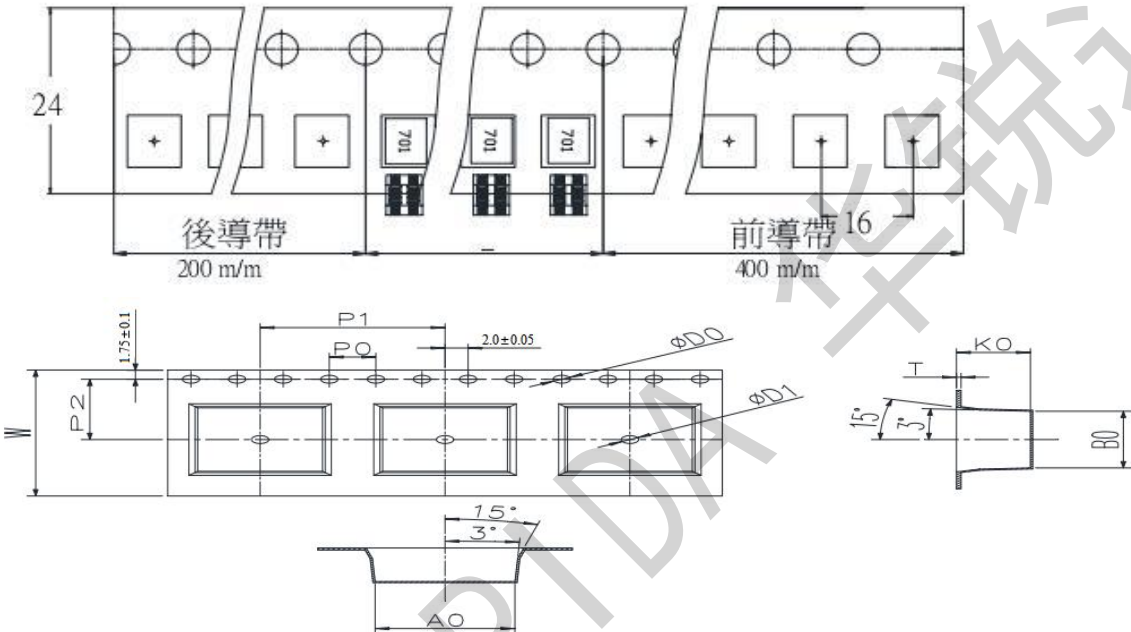


ITEM	W	Ao	Bo	Ko	P1	Do	D1	Po	T	P2	Marking
7060	16±0.1	6.6±0.1	7.6±0.1	3.4±0.05	12±0.1	1.5+1/-0	1.5+1/-0	4.0±0.1	0.35±0.05	7.5±0.1	701
9070	24±0.1	7.6±0.1	9.6±0.1	5.7±0.05	12±0.1	1.5+1/-0	1.5+1/-0	4.0±0.1	0.35±0.05	12±0.1	XXX
1211	24±0.1	11.3±0.1	12.5±0.1	6.6±0.05	16±0.1	1.5+1/-0	1.5+1/-0	4.0±0.1	0.45±0.05	12±0.1	XXX
1513	24±0.1	13.5±0.1	15.5±0.1	6.6±0.05	16±0.1	1.5+1/-0	1.5+1/-0	4.0±0.1	0.45±0.05	12±0.1	XXX

起始字需对准定位孔,印字仅供参考




Transparent carrier and cover tape/透明载带和覆盖带

Adhesive strength of cover tape is 20 to 120 gf

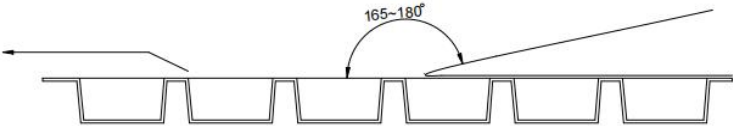

客户确认	核准	制表	制样
	甘元培	包佳琪	黄东林

		承认书		RoHS COMPLIANT	
产品型号		CSMCW7060F-701		客户料号	
产品名称		贴片共模电感		日期	
				2025/03/10	

	1、轮盘规格：13'(直径 330mm) 数量：1500PCS/盘 作业说明：A.摆料方向为字首朝导带孔. B.载带尾部用美纹胶纸固定.
	2、数量：1500PCS/袋. 作业说明:编带检查好的产品装进 PE 中.
	3、数量：4500PCS/盒 作业说明：标签朝上装入内盒里面，将内盒盖扣好.
	4、数量：22500PCS/箱. 作业说明：A.先将外箱底部封好，内盒装进外箱里面. B.将内盒装进外箱里面后，并用透明胶带封好外箱顶部. C.当尾数箱不足一整箱时需用内盒或填充物装满.

客户确认	核准	制表	制样
	甘元培	包佳琪	黄东林