
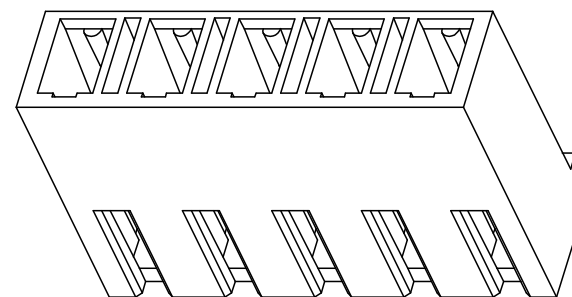


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.18	阿树


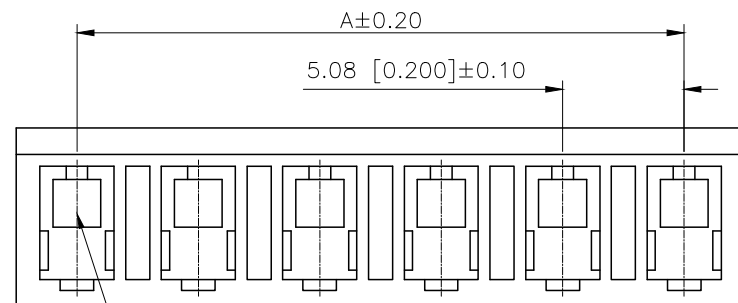


Specifications:
Voltage rating:250V AC/DC
Current rating:5A AC/DC
Withstanding voltage:1500V AC/minute
Temperature range:-40℃+125℃
Insulation resistance:≥1000MΩ
Contact resistance:≤20mΩ
Material::Nlon66 UL94V-0

PART NO.:

X5080 H-XX-NO
 (1) (2) (3) (4)

①Series No
②Category:H-HSG
③Row No.Pin No:XX-02~12Pin
④Material:N0-N1on66_94V-0

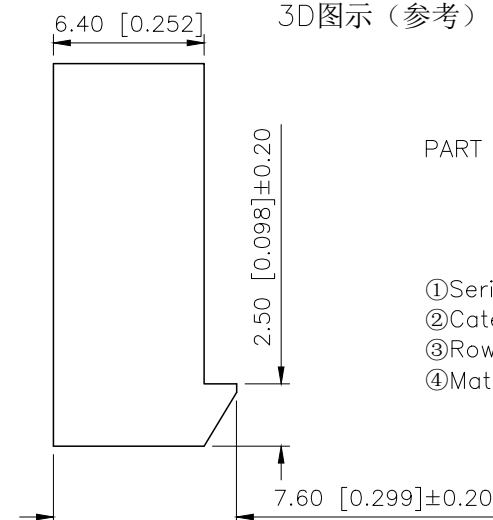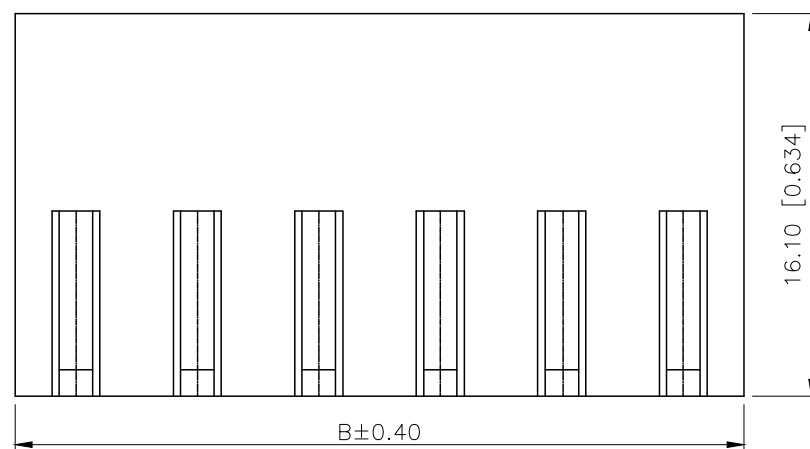

POLES	A	B
2	5.08	10.16
3	10.16	15.24
4	15.24	20.32
5	20.32	25.40
6	25.40	30.48
7	30.48	35.56
8	35.56	40.64
9	40.64	45.72
10	45.72	50.80
11	50.80	55.88
12	55.88	60.96

X5080H-XX-NO	Nylon66 UL 94V-0	X5080T	X5080W
PART NO	Material	Suitable KXB Terminal	Suitable KXB Wafer

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED	TOLERAUCES



DESIGN	阿树	VIEW: 	MODEL TYPE: 5.08mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X5080H-XX-N0
APPROVED		SIZE: A4	DWG NO.:

SCALE	PAGE	REVISION
N/A	1/1	A1

XKB INDUSTRIAL PRECISION CO.,LIMITED