

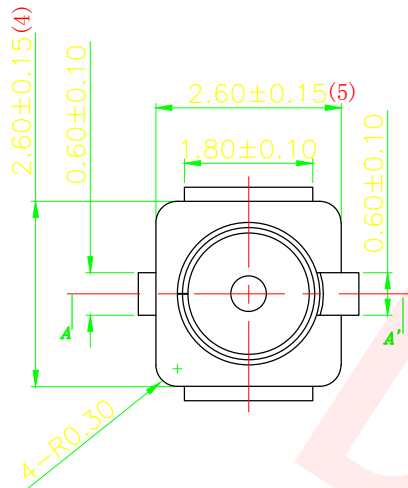
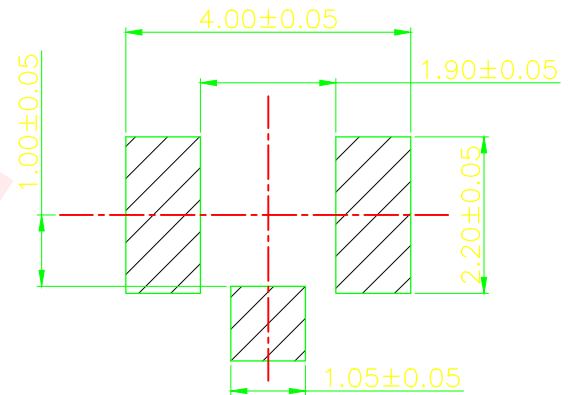




SECTION A-A'



PCB LAYOUT



Product NO.

DOSIN-861-0002

REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2016/2/24	John kine
B				

Specification:

- 1.Current Rating: 0.5A Max;
- 2.Impedance;500HM Nominal;
- 3.Operating Temperature: -40°C~+90°C;
- 4.VSWR:DC-3GHz≤1.30, 3GHz-6GHz≤1.30;
- 5.Durability:30Cycles;
- 6.Soldering Heat Resistantcc:260°C For 5±1Sec;

MATERIAL:

1. HOUSING (MOLDING): LCP UL94 V-0 WHITE;
2. CONTACT PIN: BRASS (C2680-H) T=0.15±0.01MM;
3. SHELL: PHOSPHOR BRONZE (C5191-H) T=0.15±0.01MM;

PLATING

1. SHELL: GOLD PLATED 1.5U", 50U" MIN NICKLE, UNDERPLATED OVER ALL
2. CONTACT : GOLD PLATED 3U", 50U" MIN NICKLE, UNDERPLATED OVER ALL


NOTE:

Tolerance

X.	±0.25
X.X	±0.15
X.XX	±0.10
Angular	±5°

DRAWN
Zelin. Zhang

View



CHECKED

UNIT

MM

APPROVALS

SCALE

1:1



Dosin Industrial (H.K) Co., Ltd

东莞市德索五金电子制品有限公司

Dosin Hardware Electronics Co., Ltd

Name: IPEX CONNECTOR

E-mail: dosin2005@163.com
dosin2005@dosin-china.com
Web: http://www.dosinconn.com
TEL: (0086) 769-81153906
FAX: (0086) 769-81875836

SIZE

Product NO.

DOSIN-861-0002

REV

A

DateTime

2016/2/24

CAD FILE

H/company drawings/BD

SHEET: 1 OF 1

3	Insulator	LCP white	1
2	Center Contact	Brass Gold	1
1	Contact shell	Phosphor Bronze Gold	1
ITEM	PART NAME	DESCRIPTION (MATERIAL AND FINISH ETC.)	Q'TY

A

B

C

D

E

F

G