6-968970-1 <

AMP | AMP MCP 2.8, AMP MCP Connector System

TE Internal #: 6-968970-1 Housing for Female Terminals, Wire-to-Wire, 6 Position, 5 mm [.197 in] Centerline, Light Blue, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > AMP Unsealed Connector Housing



Connector System: Wire-to-Wire Number of Positions: **6**

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 5 mm [.197 in]

Sealable: No

All AMP Unsealed Connector Housing (176)



Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	6
Number of Rows	2
Electrical Characteristics	
Operating Voltage	28 VDC

Housing for Female Terminals, Wire-to-Wire, 6 Position, 5 mm [.197 in] Centerline, Light Blue, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Nominal Voltage Architecture	28 V	
Body Features		
Cable Exit Angle	180°	
Primary Product Color	Light Blue	
Connector & Keying Code	С	
Contact Features		
Contact Size	2.8mm	
Contact Type	Receptacle	
Mating Tab Width	2.8 mm[.11 in]	
Mechanical Attachment		
Terminal Position Assurance	No	
Strain Relief	Without	
Mating Alignment Type	Keyed	
Mating Alignment	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		

Housing Material

PBT GF

Centerline (Pitch)

5 mm[.197 in]

Di	mer	nsic	ons
		ISIC	113

Connector Height	24 mm[.945 in]
Product Width	16 mm[.63 in]
Product Length	16 mm[.63 in]
Row-to-Row Spacing	5 mm[.197 in]
Usage Conditions	
Operating Temperature (Max)	120 °C[248 °F]
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]
Operation/Application	
Circuit Application	Power
Packaging Features	
Packaging Quantity	2400
Packaging Method	Box
Other	

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 6 Position, 5 mm [.197 in] Centerline, Light Blue, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Serviceable	No
Connector Position Assurance Capable	No
Product Compliance	
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Also in the Series AMP MCP 2.8

Housing for Female Terminals, Wire-to-Wire, 6 Position, 5 mm [.197 in] Centerline, Light Blue, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid




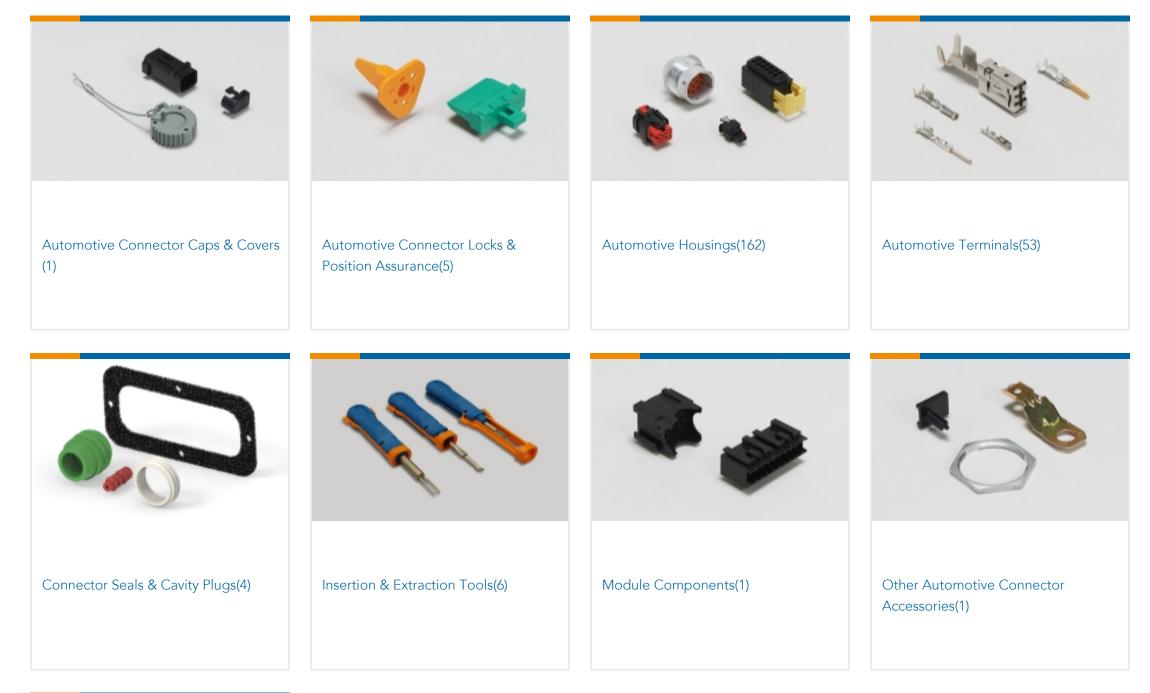



PCB Headers & Receptacles(1)

Also in the Series AMP MCP Connector System

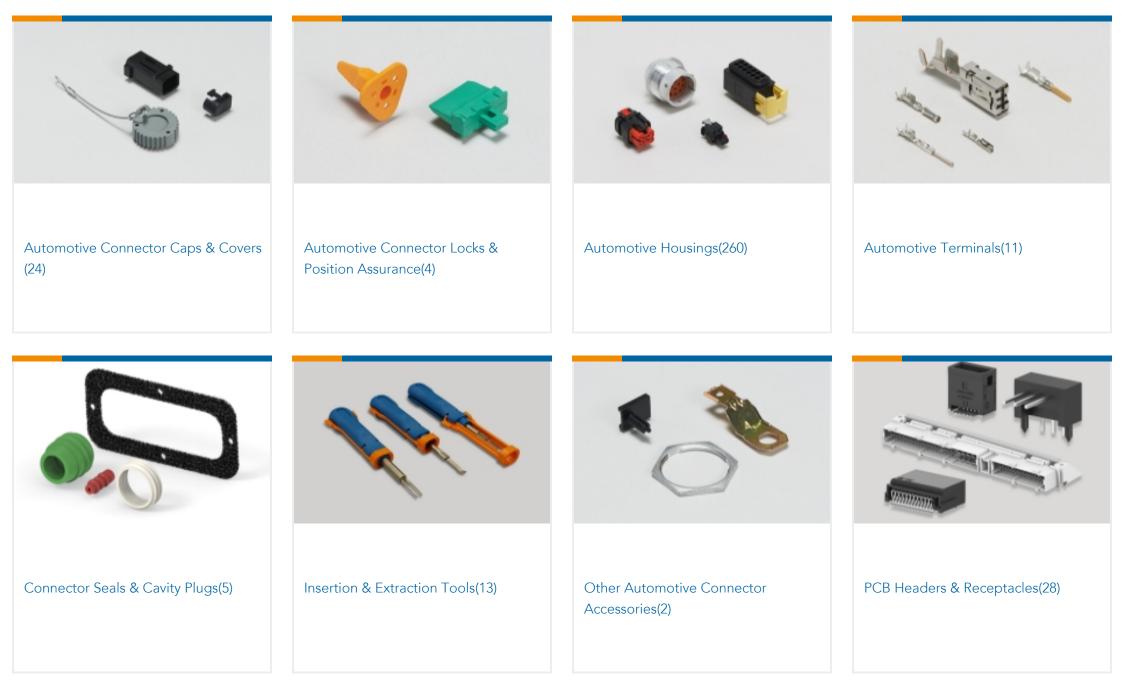

Housing for Female Terminals, Wire-to-Wire, 6 Position, 5 mm [.197 in] Centerline, Light Blue, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Customers Also Bought

	E TE		
TE Part #3-965641-1 AMP Unsealed Connector Housing	TE Part #3-967325-3 2,5MM BU-GEH 2P,GN	TE Part #1-2819196-8 3 W ABS CABLE ASSY MBB 9.000	TE Part #2-2819195-4 2 W ABS CABLE ASSY MBB 8.000
TE Part #2-2819195-5	TE Part #2-2819196-1	TE Part #2819195-4	TE Part #2819359-2
2 W ABS CABLE ASSY MBB 9.000	3 W ABS CABLE ASSY MBB 9.000	2 W ABS CABLE ASSY MBB 11.000	LOWER COVER

Documents

Product Drawings AMP MCP 2.8 HSG 6POS 2.LOCKING

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_6-968970-1_F.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_6-968970-1_F.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_6-968970-1_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English