

SAMZO






REAC/ROHS

REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2018.06.12

技术要求:

Technical requirements:

- 打铜底0.5-1UM, 镍底2-2.5UM, 哑锡3-5UM。
Copper base 0.5 - 1 UM, nickel base 2 - 2.5 UM, matte tin 3 - 5 UM.
- 不得有脚变形, 毛刺等缺陷。
There shall be no defects such as pin deformation and burrs.
- 插脚尖部符合可焊性要求。
The tip of the insertion pin shall meet the solderability requirements.
- 螺纹需符合通止规要求。
The thread shall meet the requirements of the go and no-go gauge.
- 材质: 黄铜H65。
Material: Brass H65.
- 过载电流: 60A
Overload current: 60A
- 螺孔为 垫片M6
The screw holes M6
- 未标注尺寸公差值按GB/T1184-1996H级
Unmarked dimensional tolerance values are in accordance with Grade H of GB/T1184-1996

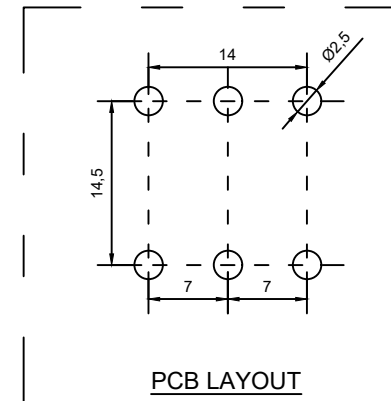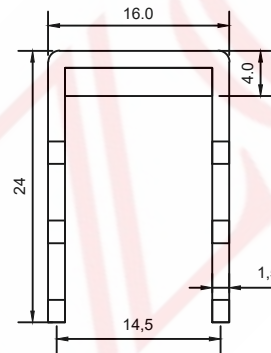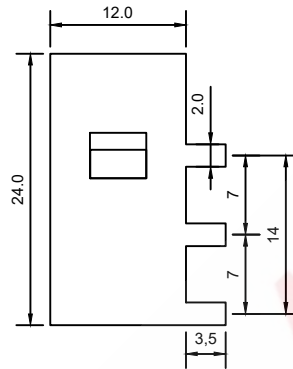

1216 120 35 0 M6

SERISE:
12*16mm

FOOT HIGH:
H3.5mm

SCREW HOLE:
M6

HIGH:
H12.0mm

CUSTOM CODE:
ROUTINE

垫片M6

PCB LAYOUT

ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR	FIRST VIEW				TITLE: 1216-H12+3.5mm (垫片M6)		
A	Subject	H62(Y2)	1	tin plating					DWG NO: 1216-W001		
					GENERAL TOLERANCE				PART NO: 1216-20230655		
					≥0~2<	±0.15	SCALE	1:1	UNIT	mm	MODEL NO: 1216120350M6
					DESIGN	WANGUIFA	2018.06.12	<p>SAMZO COMPONENTS</p> <p>Electronic switch and connector manufacturer</p>			NAME: PCB soldering terminal
					CHECKED	ZHENGUILAN	2018.06.12				
					APPROVED	LILIANJIANG	2018.06.14				
F					≥2~5<	±0.25					
					≥0~2<	±0.15					
					≥5	±0.35					

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM

1

2

3

4

5

6

7

8