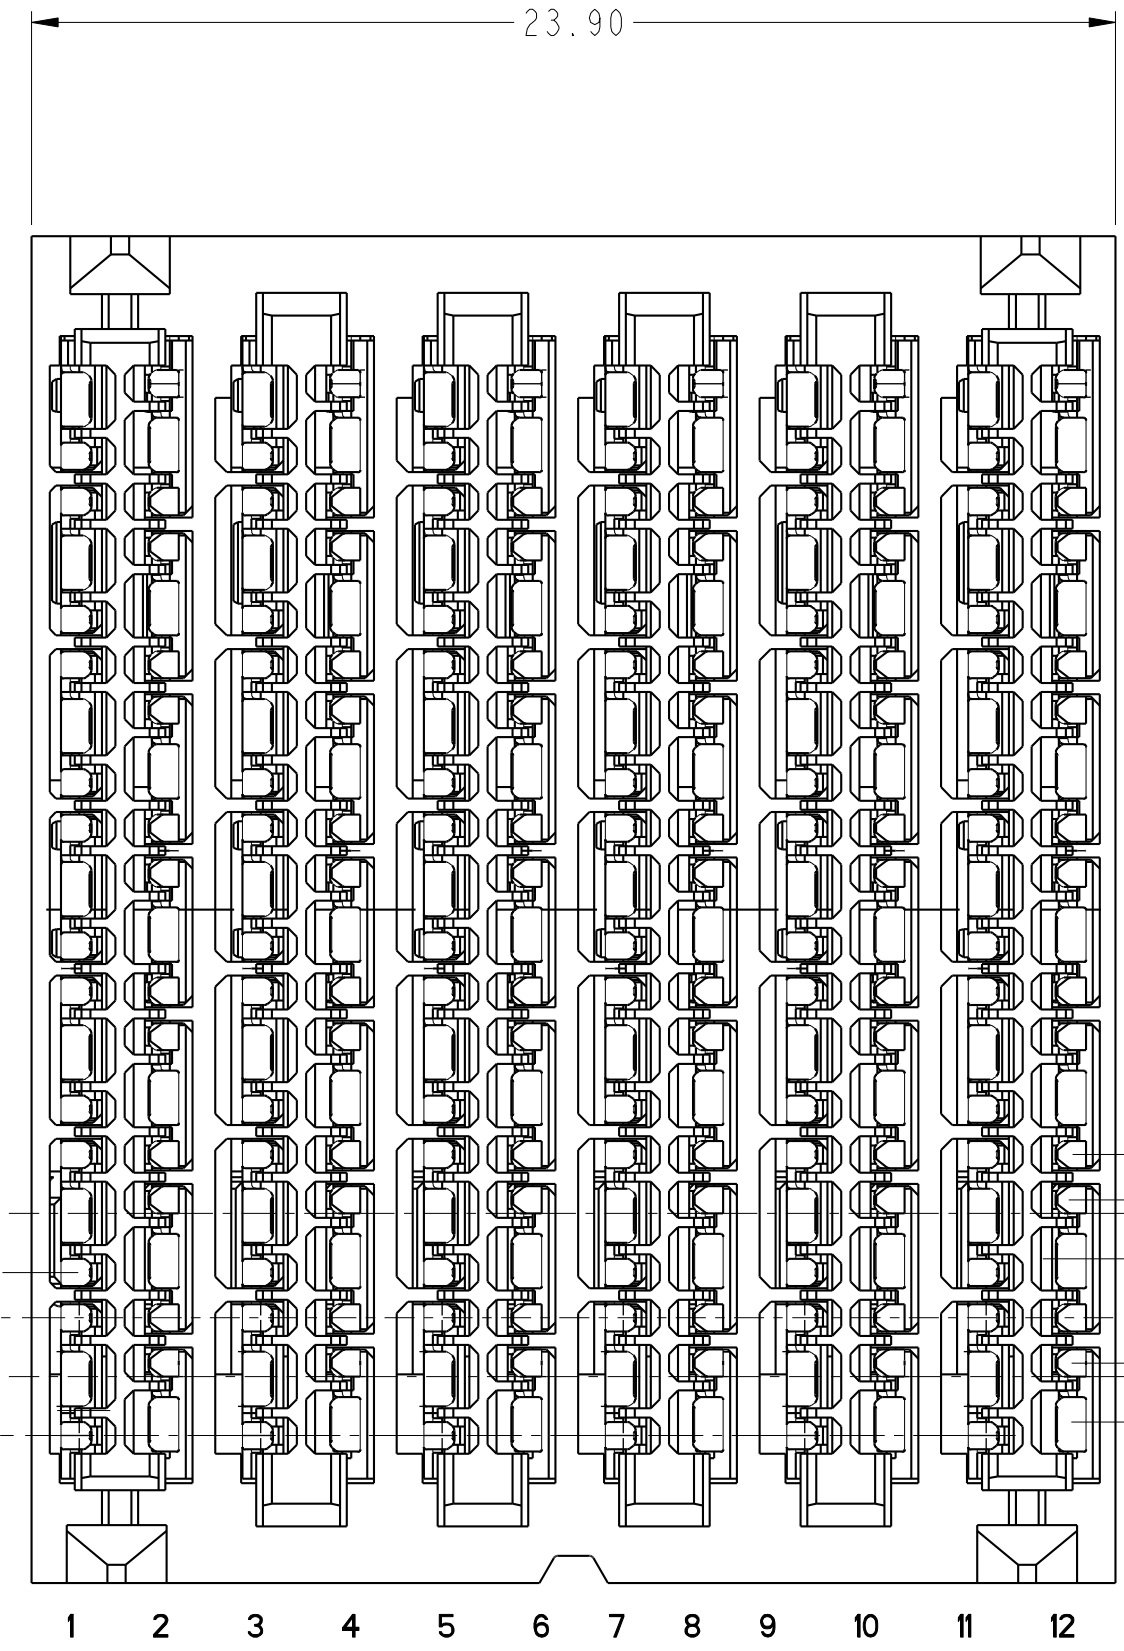
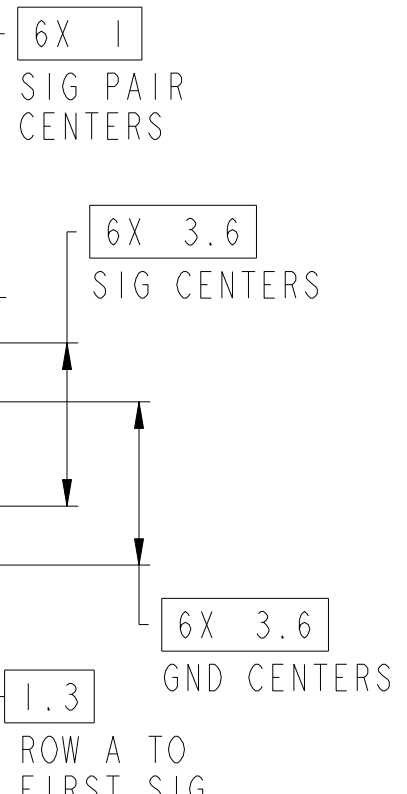


PRODUCT NUMBER
SEE SHEET 10

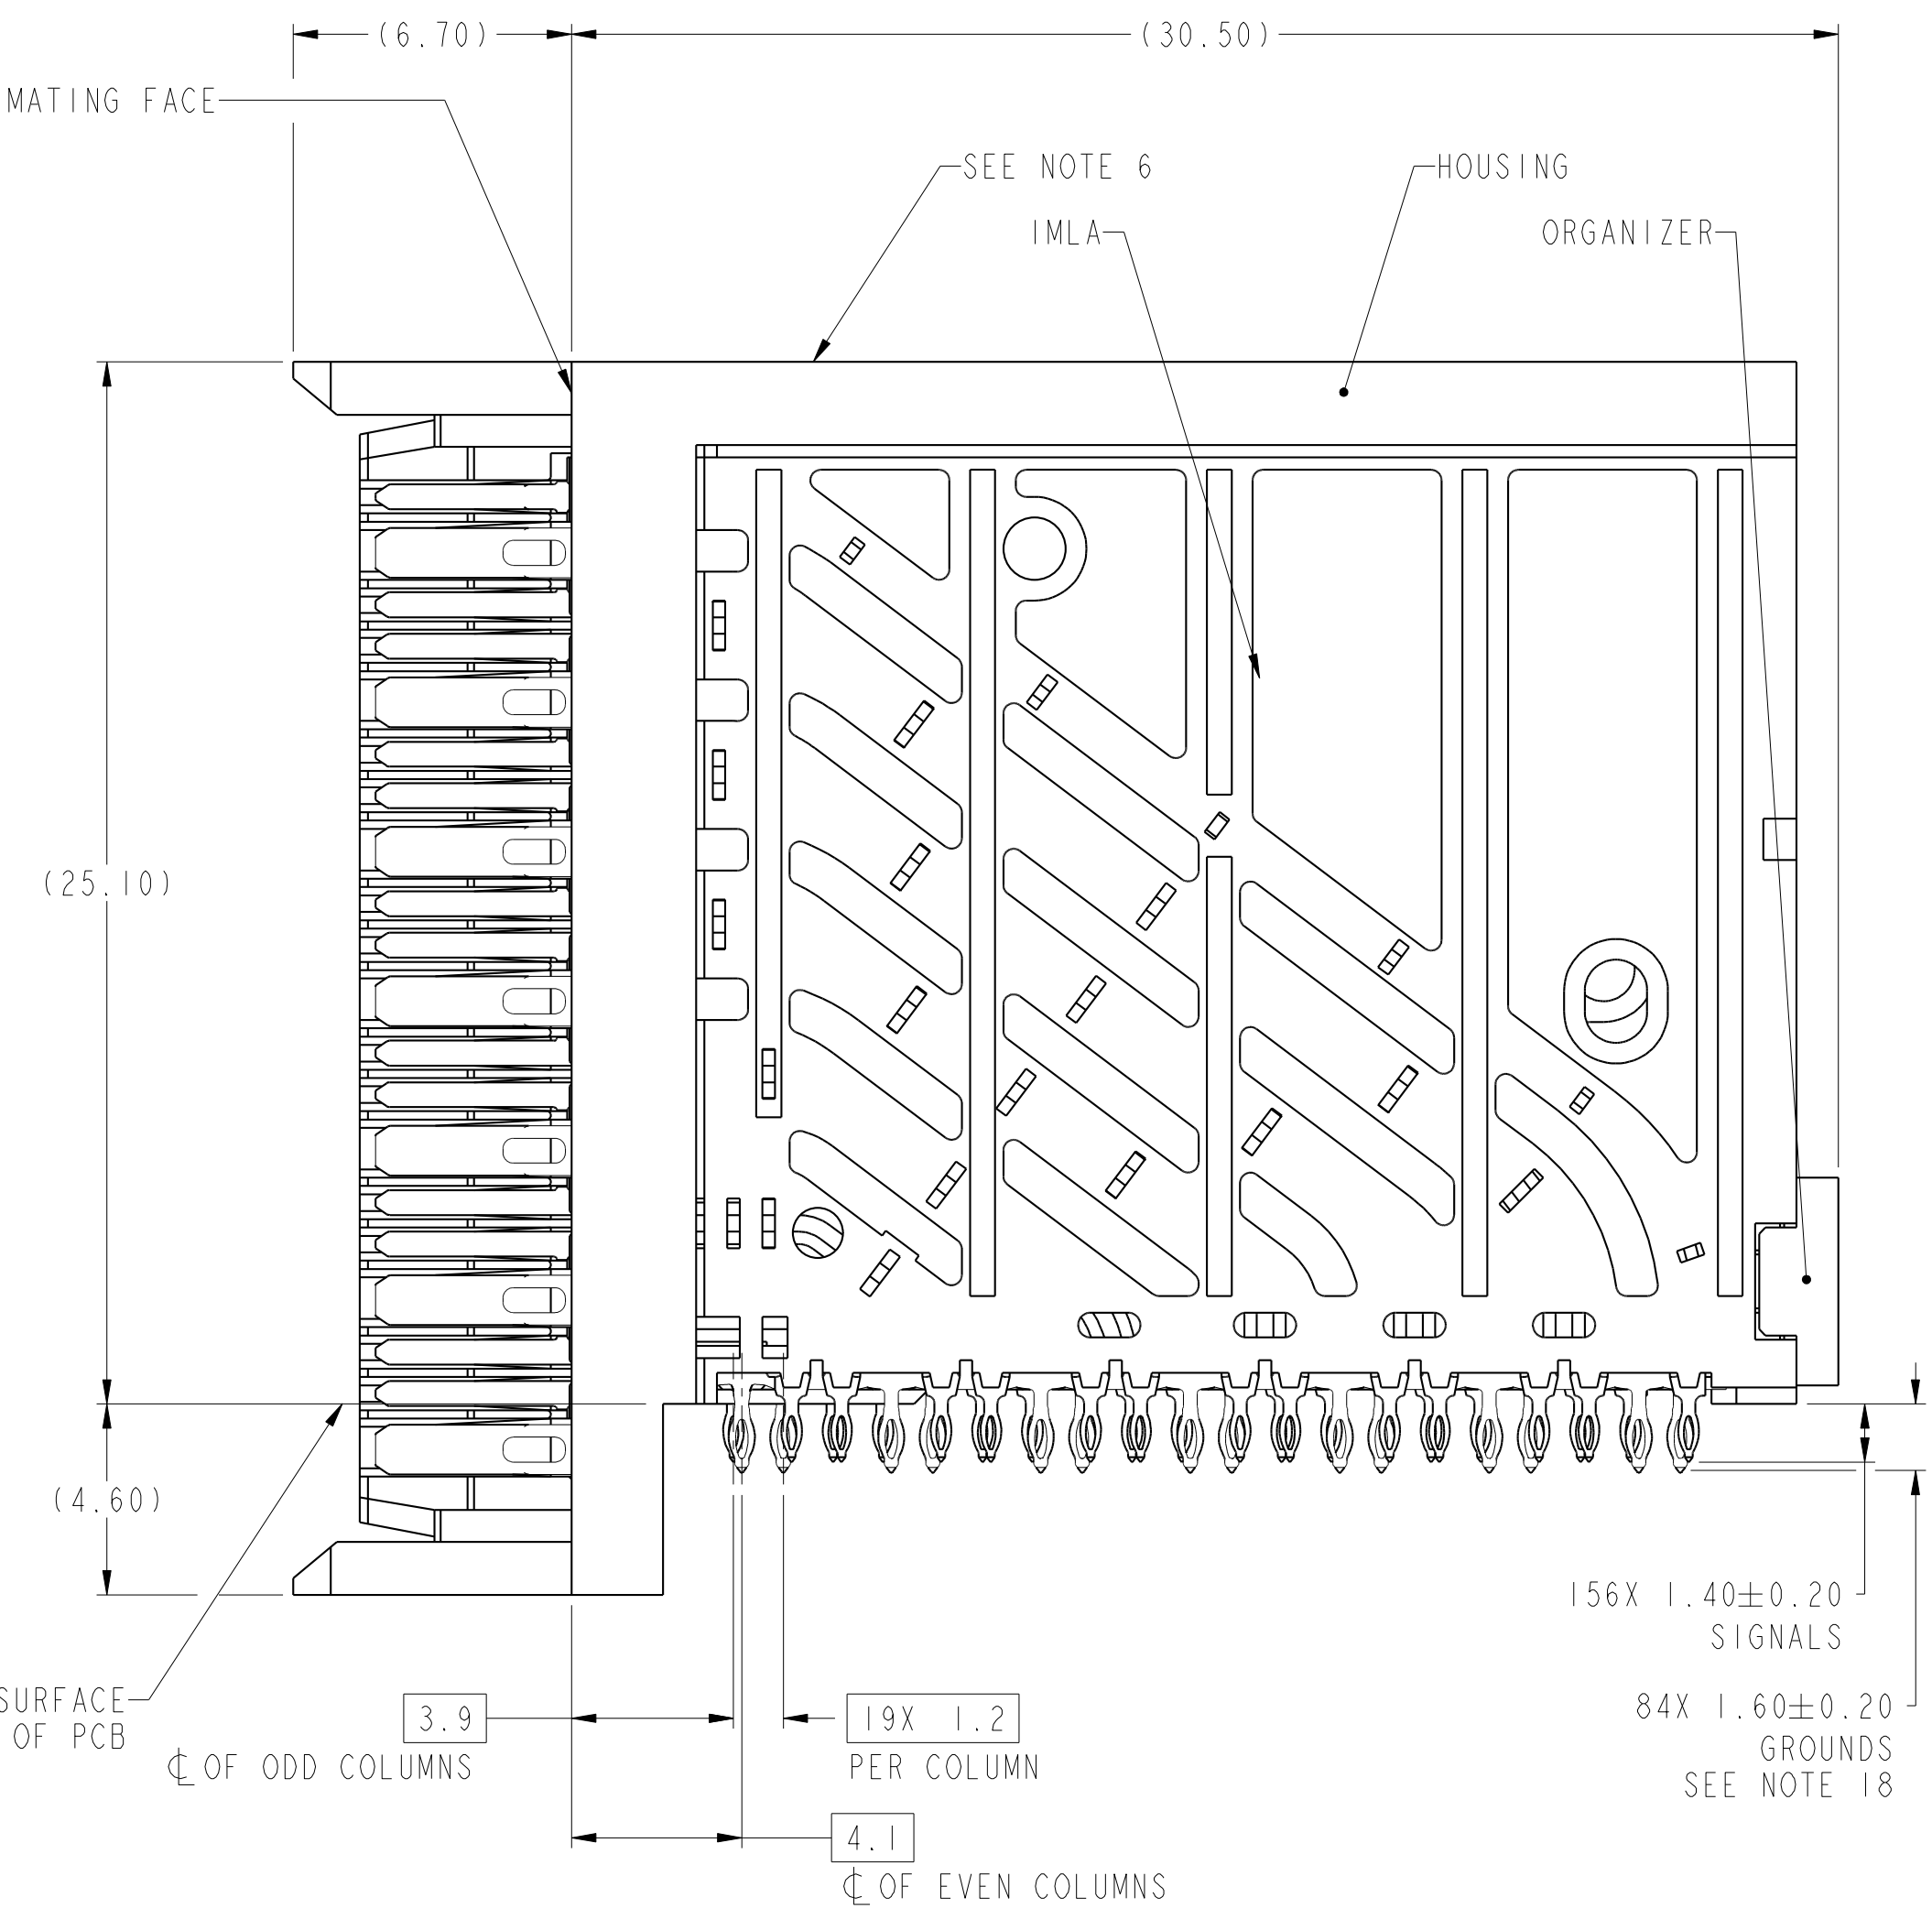
ODD COLUMN,
CONTACT ROW ID
ODD AND EVEN
COLUMNS ARE OFFSET



EVEN COLUMN,
CONTACT ROW ID



CONNECTOR MATING FACE



10124560-101LF
STANDARD MATE CONNECTOR

spec ref	SEE NOTES	dr	Stu Stoner	2013/1/19	projection	MM	size	A2	scale	7:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Norman Luo	2017/1/01			ecn no	ELX-DG-28236-1		
ASME Y14.5M		chr	Justin Chen	2017/1/29			rel level	Released		
		appr	Heaven Cen	2017/1/30			product family	ExaMAX		
surface	linear	0.X	±.3		ExaMAX RIGHT-ANGLE HDR ASSY 6 PR, 240 POS, 12 IMLA, 2MM	dwg no 10124560	rev B	cat. no. Product - Customer Drw sheet 1 of 11		
		0.XX	±.10							
		0.XXX	±.050							
	angular	0°	±°							

PDS: Rev :B

STATUS:Released

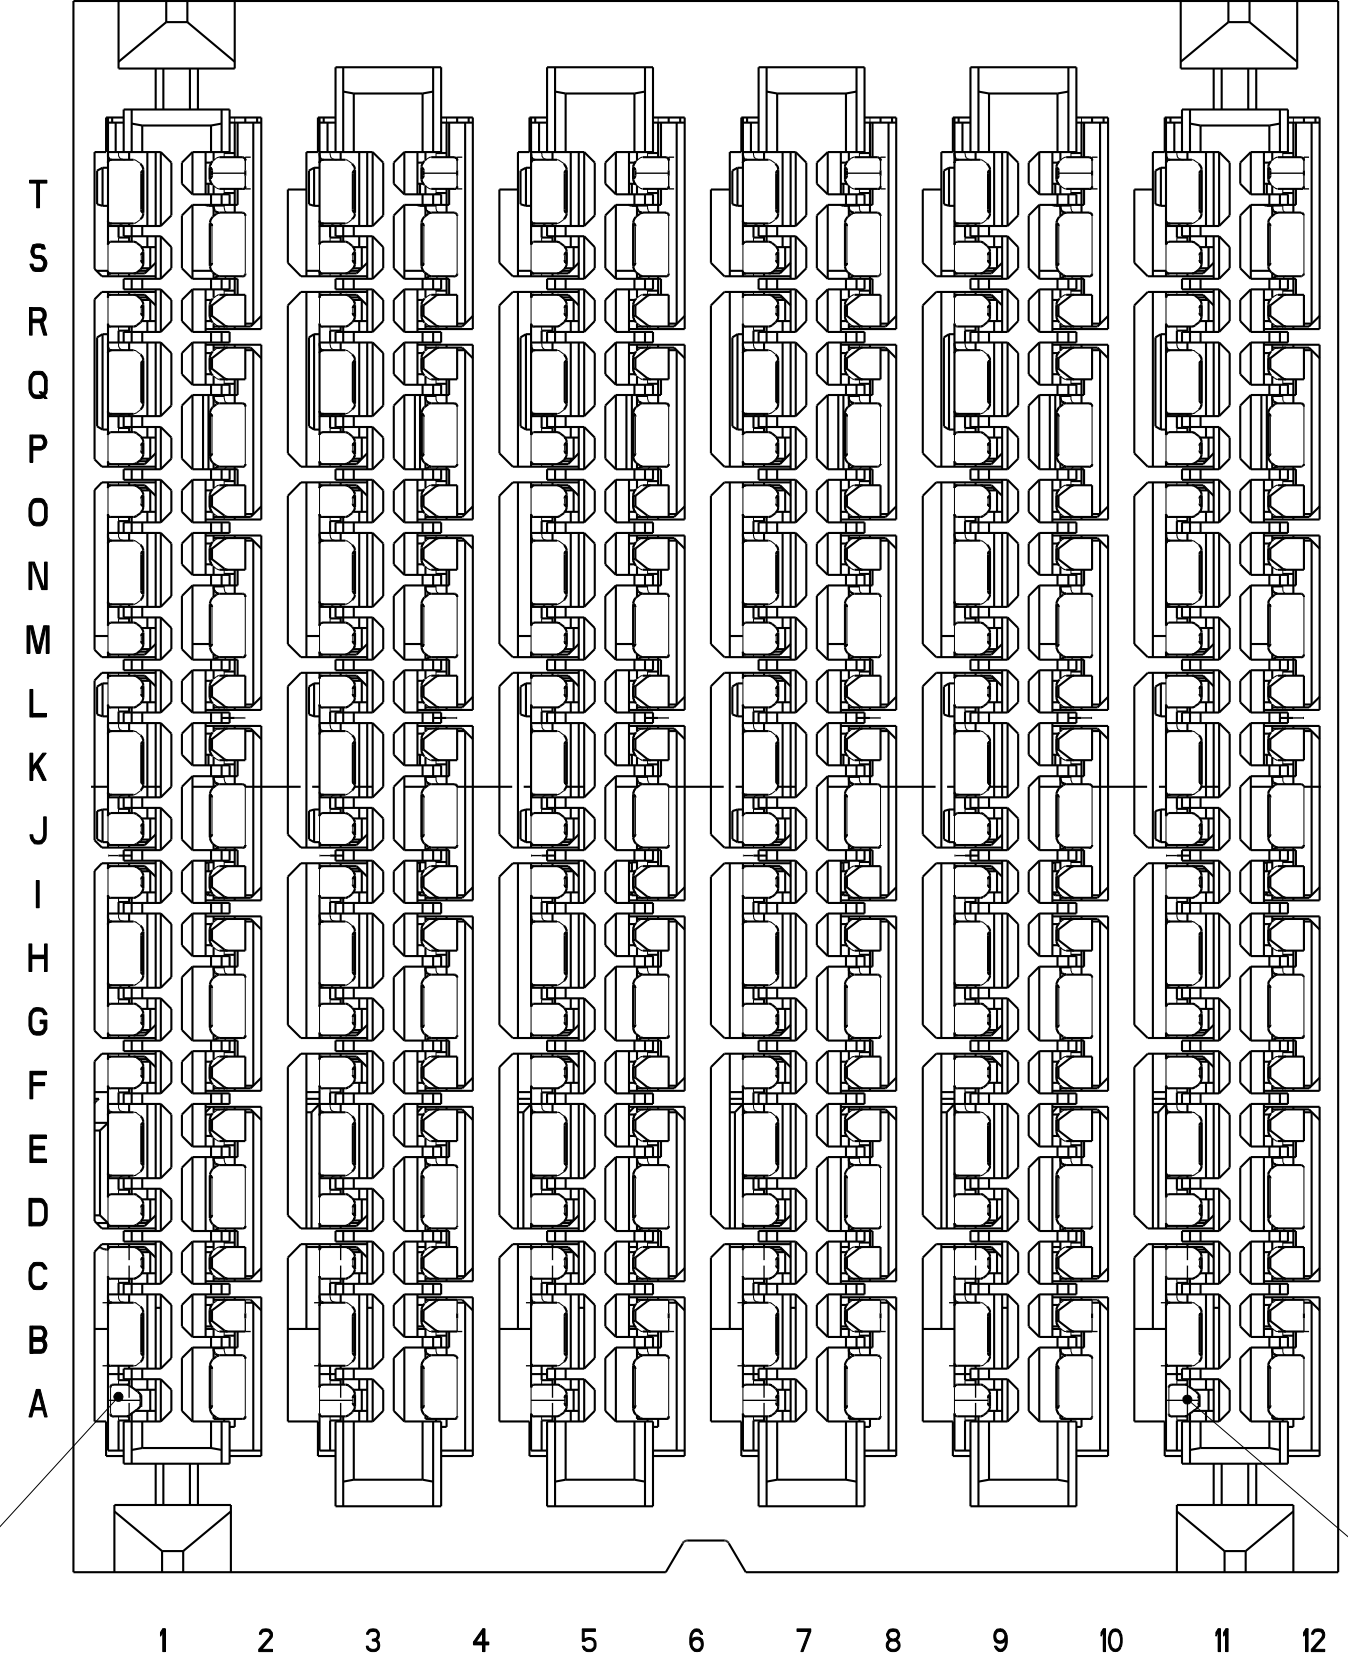
Printed: Dec 13, 2017

Amphenol FCI

© 2016 AFCI

1 2 3 4 5 6 7 8

A
B
C
D
E
F



ADVANCED MATE POSITION A1
SEE NOTE 13

ADVANCED MATE POSITION A11
SEE NOTE 13

10124560-201LF
ADVANCED MATE CONNECTOR
 ADVANCED MATE POSITIONS ARE POSITIONS A1 AND A11 ONLY
 FOR ALL DIMENSIONS SEE 10124560-101LF ON SHEET 1

Amphenol FCI

© 2016 AFci

spec ref	SEE NOTES	dr	Stu Stoner	2013/11/19	projection	MM	size	A2	scale	6:1									
tolerance std	ASME Y14.5M	eng	Norman Luo	2017/11/01			ecn no	ELX-DG-28236-1											
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Justin Chen	2017/11/29			rel level	Released											
surface	<table border="1"> <tr> <td rowspan="3">-</td> <td rowspan="3">linear</td> <td>0.X</td> <td>±.3</td> </tr> <tr> <td>0.XX</td> <td>±.10</td> </tr> <tr> <td>0.XXX</td> <td>±.050</td> </tr> <tr> <td></td> <td>angular</td> <td>0°</td> <td>±°</td> </tr> </table>	-	linear	0.X	±.3	0.XX	±.10	0.XXX	±.050		angular	0°	±°	product family	ExaMAX	rel level	Released		
-	linear			0.X	±.3														
				0.XX	±.10														
		0.XXX	±.050																
	angular	0°	±°																
		appr	Heaven Cen	2017/11/30			title	ExaMAX RIGHT-ANGLE HDR		rev	B								
					cat. no.	Product - Customer Drw		dwg no	10124560	sheet 2 of 11									

PDS: Rev :B

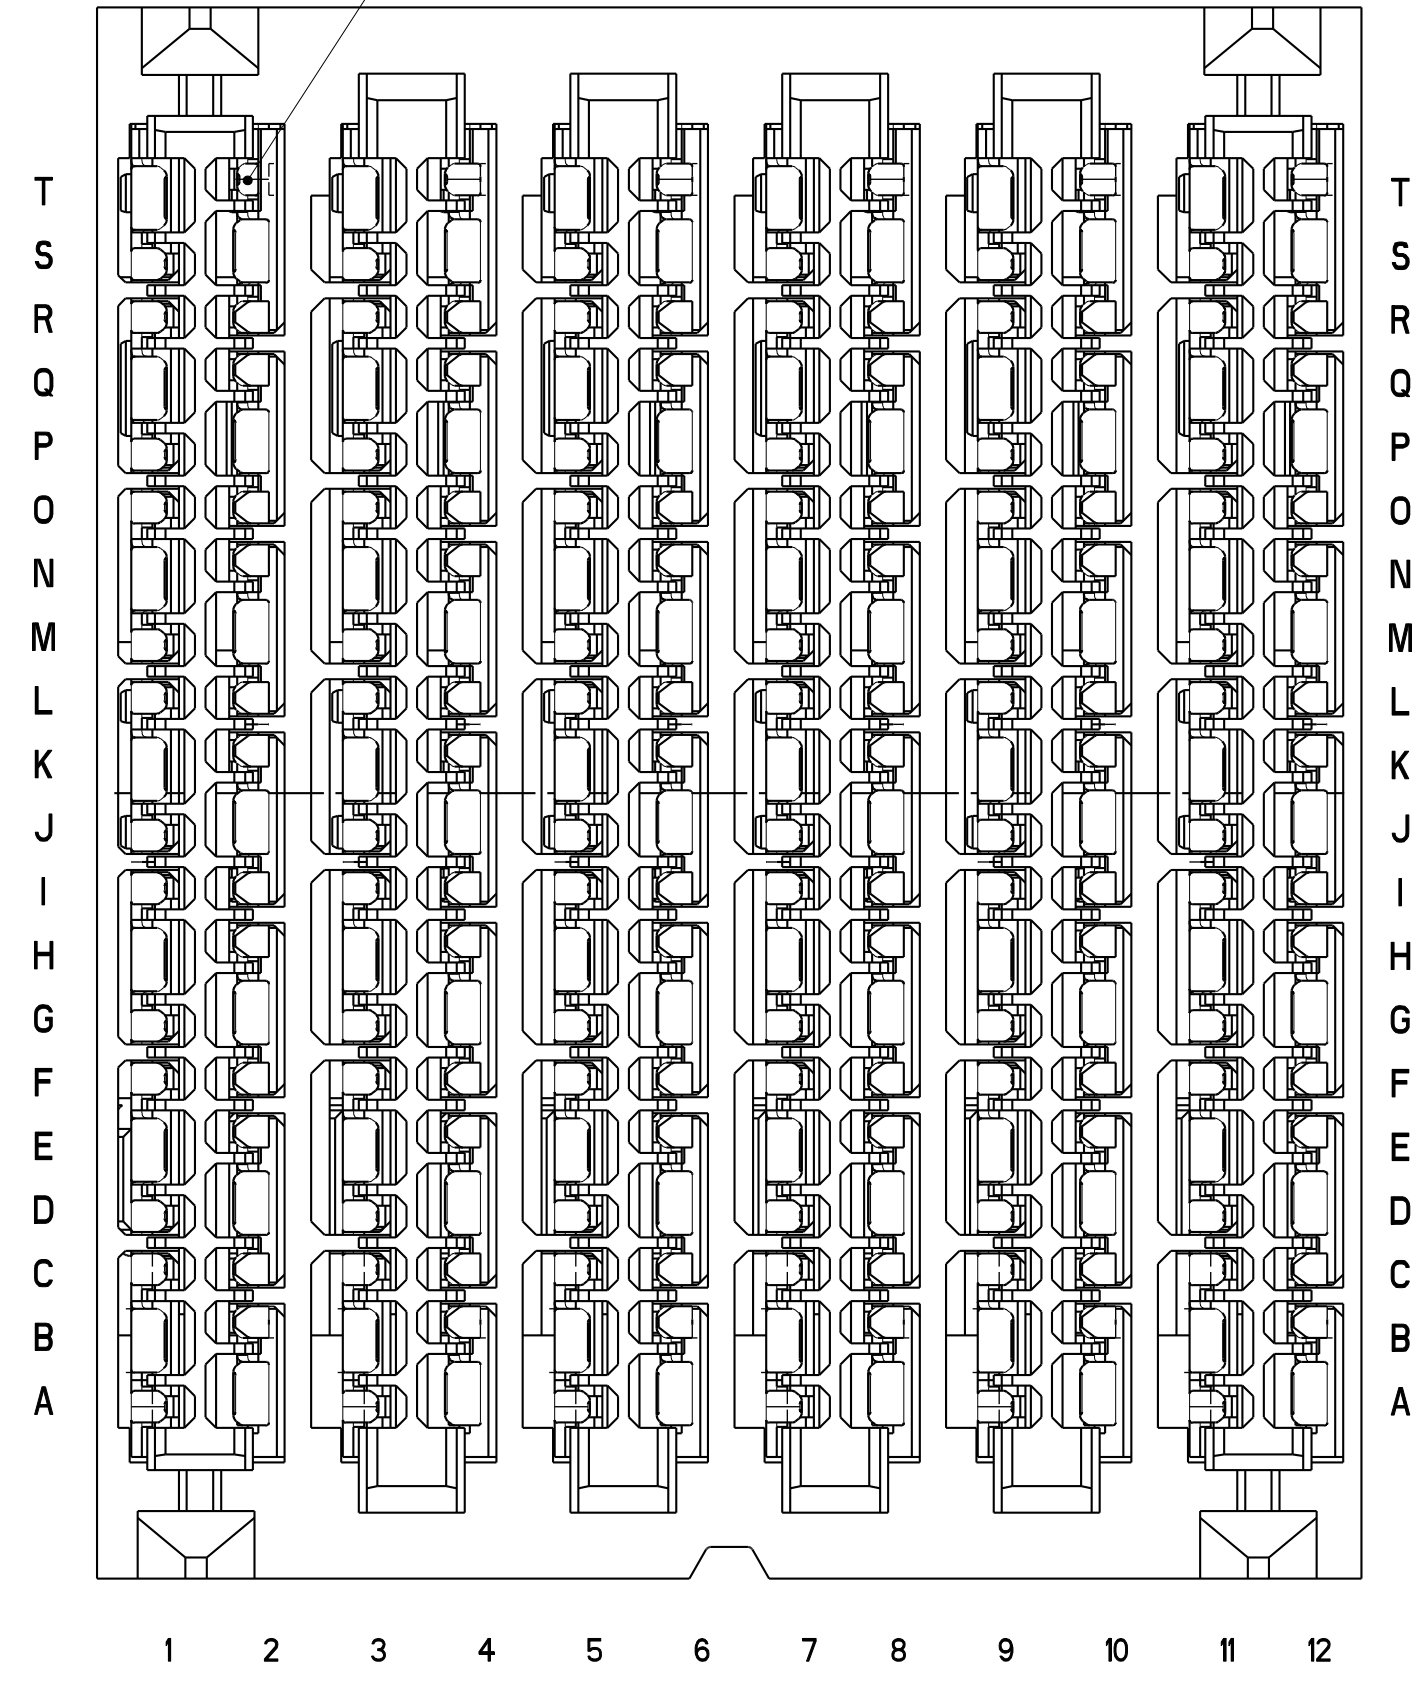
STATUS:Released

Printed: Dec 13, 2017

1 2 3 4 5 6 7 8

A B C D E F

SHORT DETECT
POSITION T2
SEE NOTE 14



10124560-301LF
SHORT DETECT CONNECTOR
SHORT DETECT POSITION IS T2 ONLY
FOR ALL DIMENSIONS SEE 10124560-101LF ON SHEET 1

Amphenol
FCi


© 2016 AFci

spec ref	SEE NOTES	dr	Stu Stoner	2013/11/19	projection	MM	size	A2	scale	6:1												
tolerance std	ASME Y14.5M	eng	Norman Luo	2017/1/01			ecn no	ELX-DG-28236-1														
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Justin Chen	2017/11/29			rel level	Released														
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±.3</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±.10</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±.050</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±°</td> </tr> </table>	linear	0.X	±.3		0.XX	±.10		0.XXX	±.050	angular	0°	±°	appr	Heaven Cen	2017/11/30	product family	ExaMAX		rel level	Released	
linear	0.X	±.3																				
	0.XX	±.10																				
	0.XXX	±.050																				
angular	0°	±°																				
				title ExaMAX RIGHT-ANGLE HDR ASSY 6 PR, 240 POS, 12 IMLA, 2MM		dwg no 10124560	rev B	Product - Customer Drw sheet 3 of 11														

PDS: Rev :B

STATUS:Released

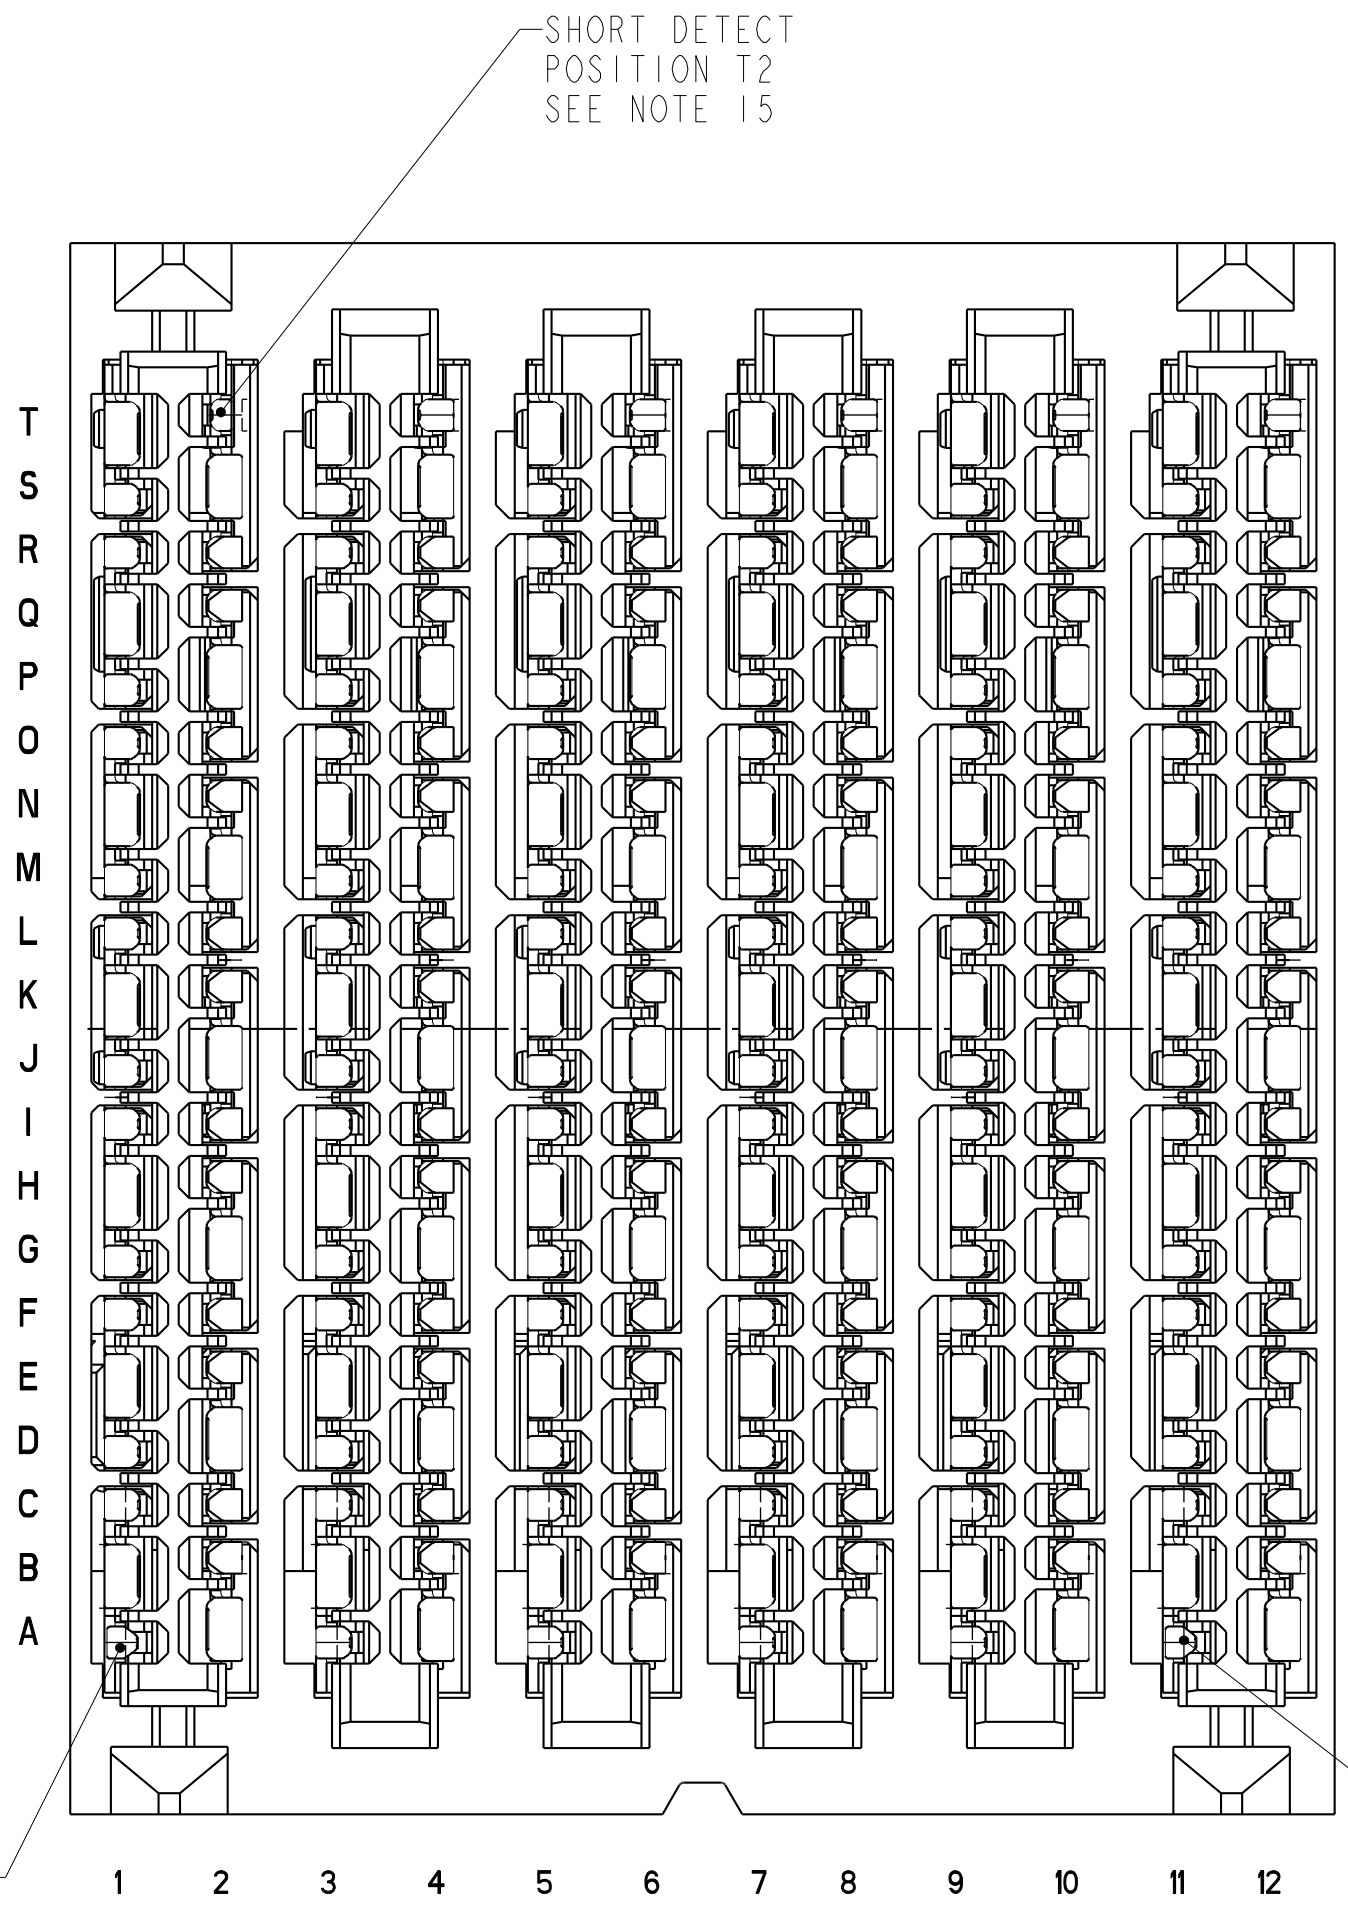Printed: Dec 13, 2017





10124560-401LF
ADVANCED MATE/SHORT DETECT CONNECTOR
 ADVANCED MATE POSITIONS ARE POSITIONS A1 AND A11 ONLY
 SHORT DETECT POSITION IS T2 ONLY
 FOR ALL DIMENSIONS SEE 10124560-101LF ON SHEET 1

**Amphenol
FCi**

© 2016 AFci

spec ref	SEE NOTES	dr	Stu Stoner	2013/11/19	projection	MM	size	A2	scale	1:1
tolerance std	ASME Y14.5M	eng	Norman Luo	2017/1/01			ecn no	ELX-DG-28236-1		
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Justin Chen	2017/11/29			rel level	Released		
surface	-	linear	0.X	±.3		product family ExaMAX	title ExaMAX RIGHT-ANGLE HDR ASSY 6 PR, 240 POS, 12 IMLA, 2MM	dwg no 10124560	rev B	cat. no. Product - Customer Drw
			0.XX	±.10						
			0.XXX	±.050						
		angular	0°	±°						sheet 4 of 11

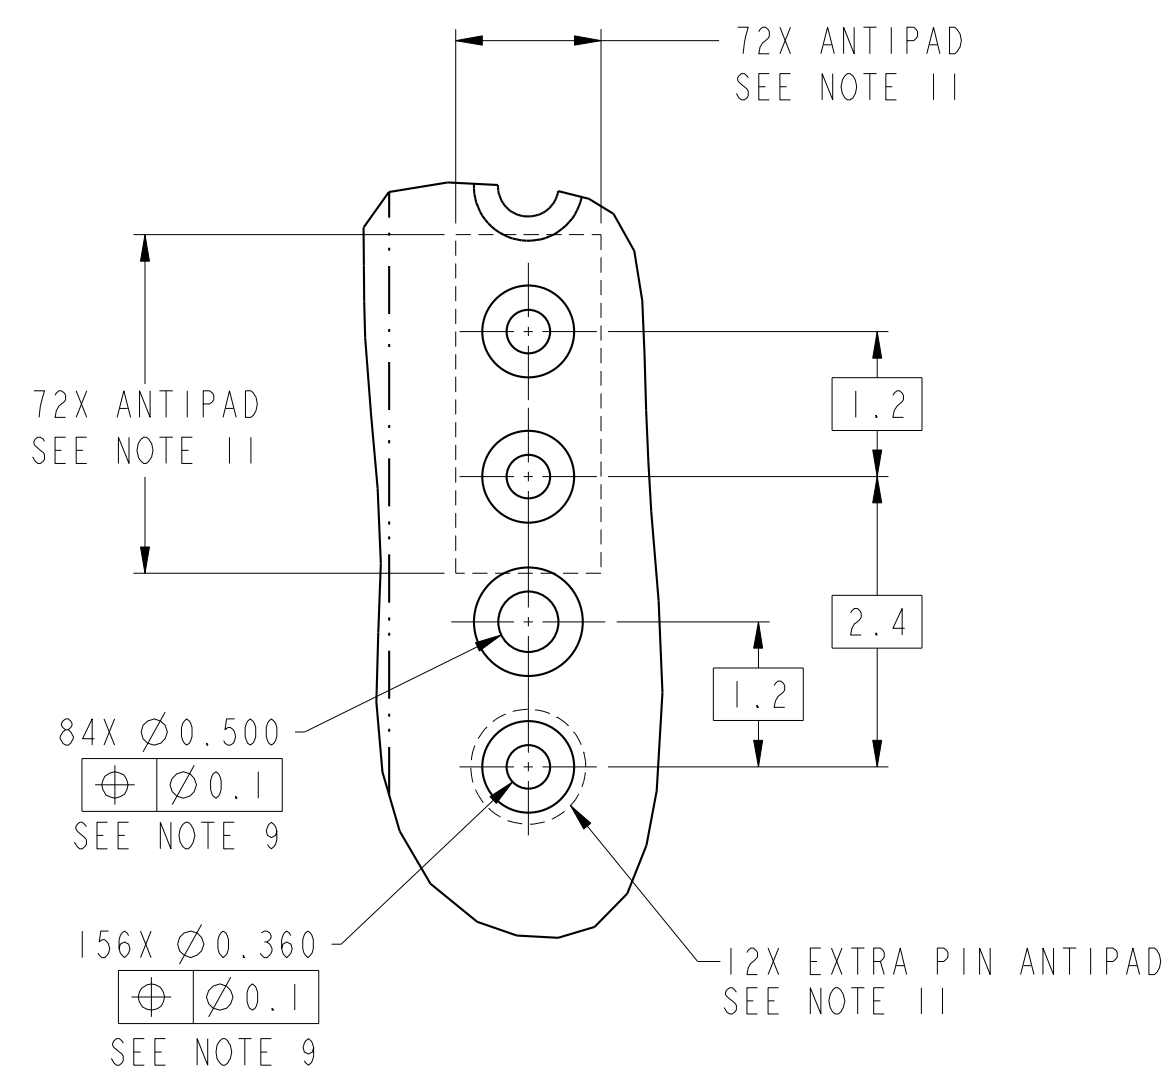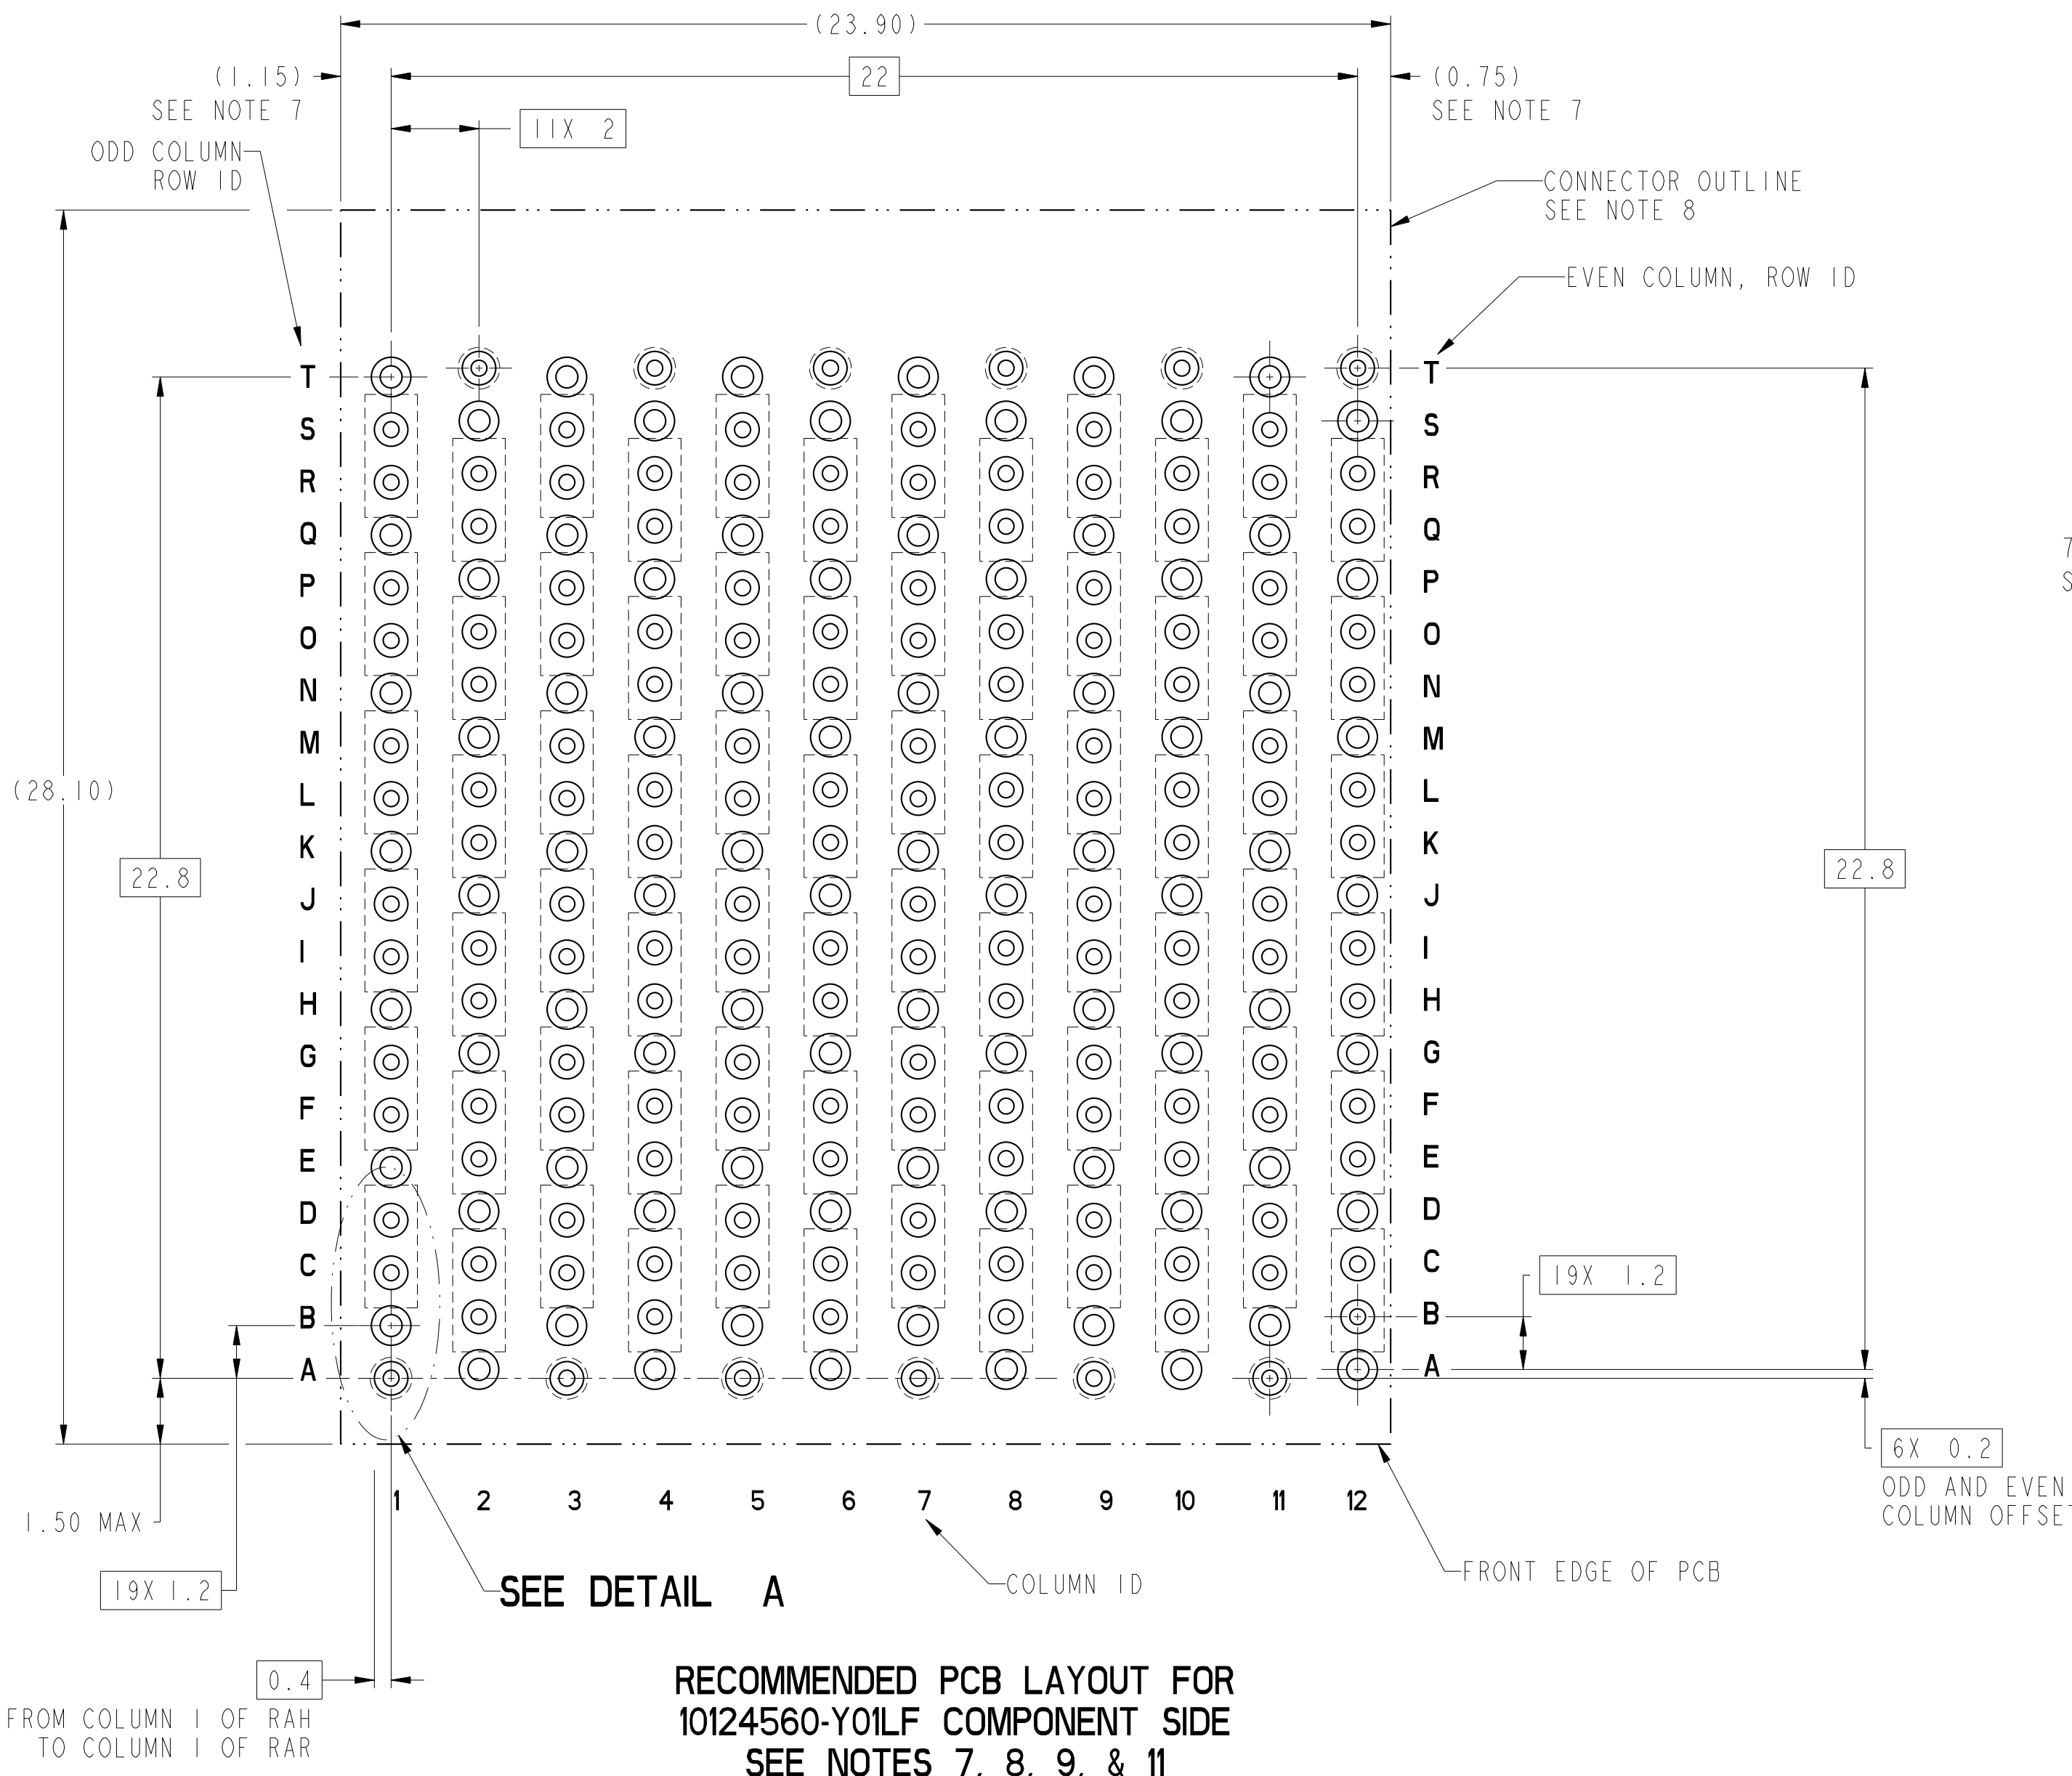

DETAIL A
SCALE 16:1

**RECOMMENDED PCB LAYOUT FOR
10124560-Y01LF COMPONENT SIDE
SEE NOTES 7, 8, 9, & 11**

spec ref	SEE NOTES	dr	Stu Stoner	2013/1/19	projection	MM	size	A2	scale	3:1	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Norman Luo	2017/1/01			ecn no	ELX-DG-28236-1			
ASME Y14.5M		chr	Justin Chen	2017/1/29			rel level	Released			
surface	linear	appr	Heaven Cen	2017/1/30	product family	ExaMAX	rel level	Released			
	angular				title	ExaMAX RIGHT-ANGLE HDR		cat. no.	10124560	rev	B
						ASSY 6 PR, 240 POS, 12 IMLA, 2MM					
						Product - Customer Drw				sheet 5 of 11	

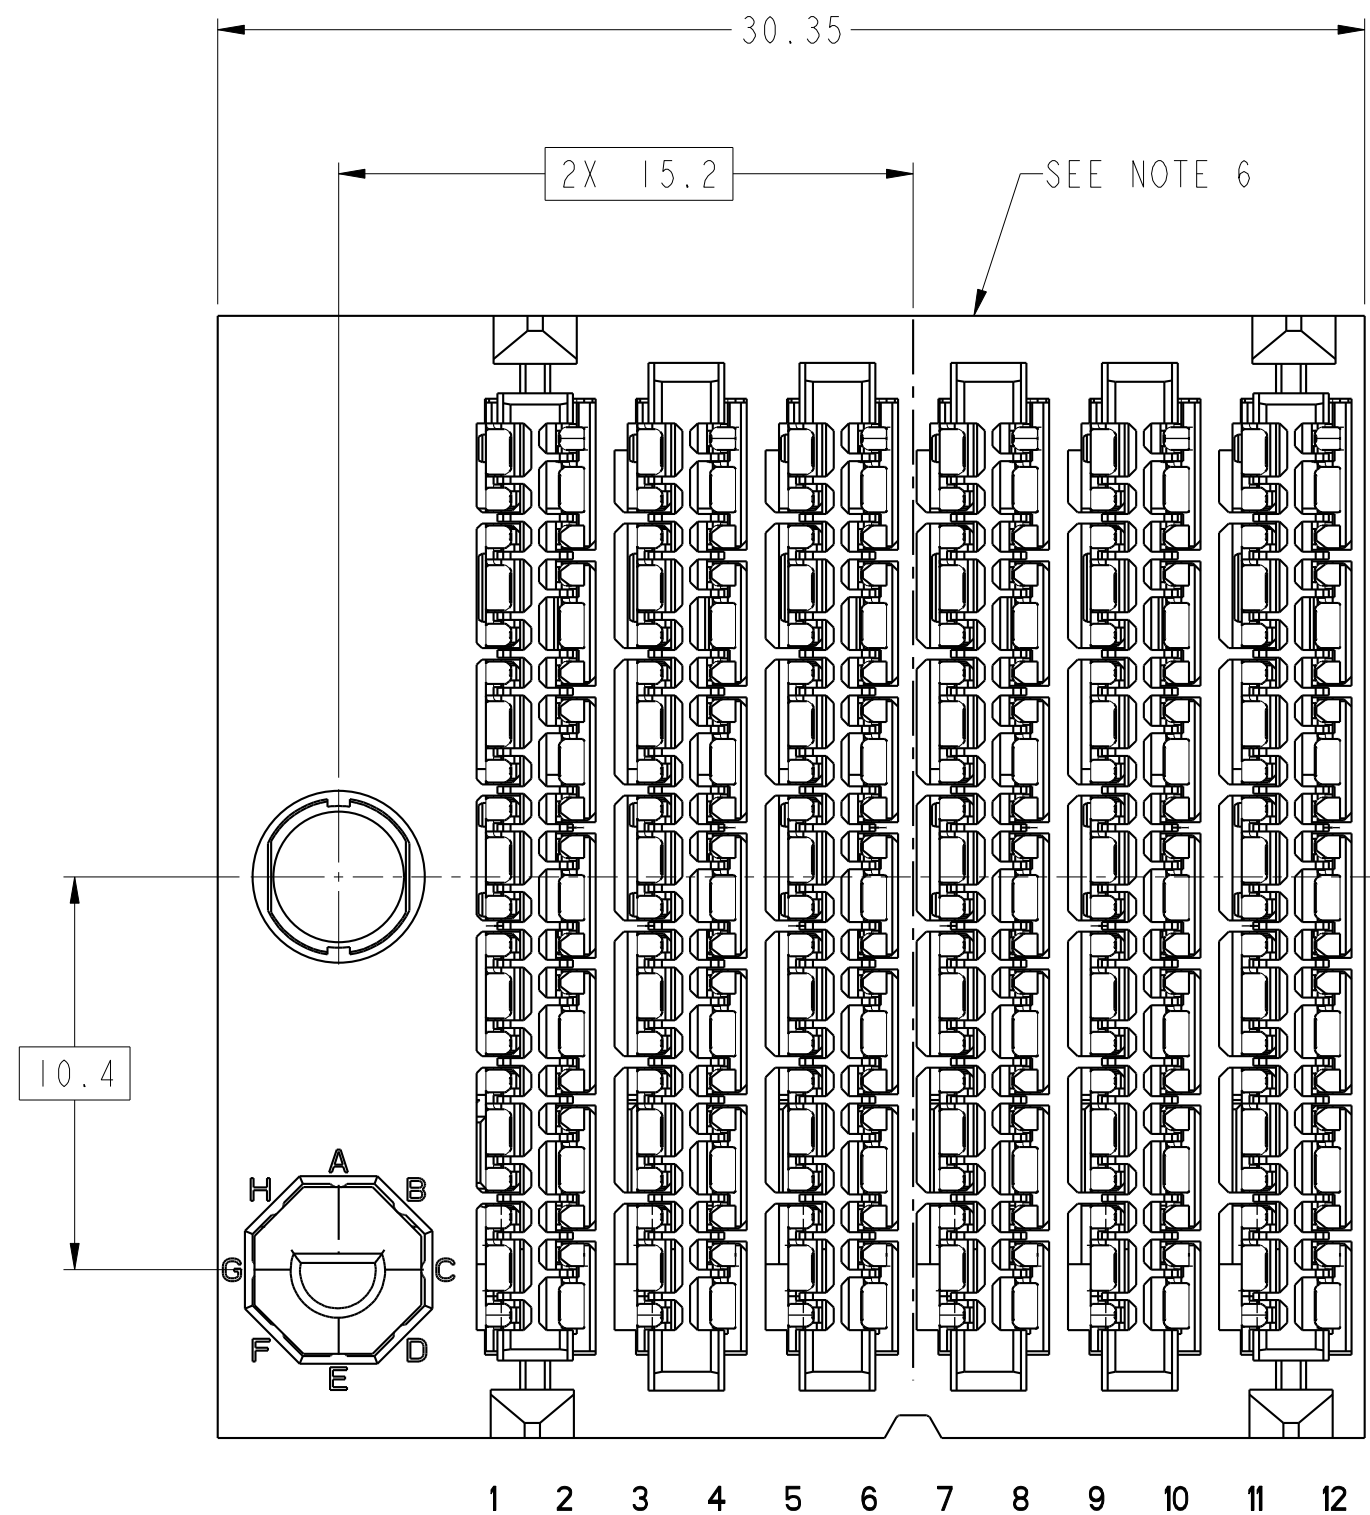
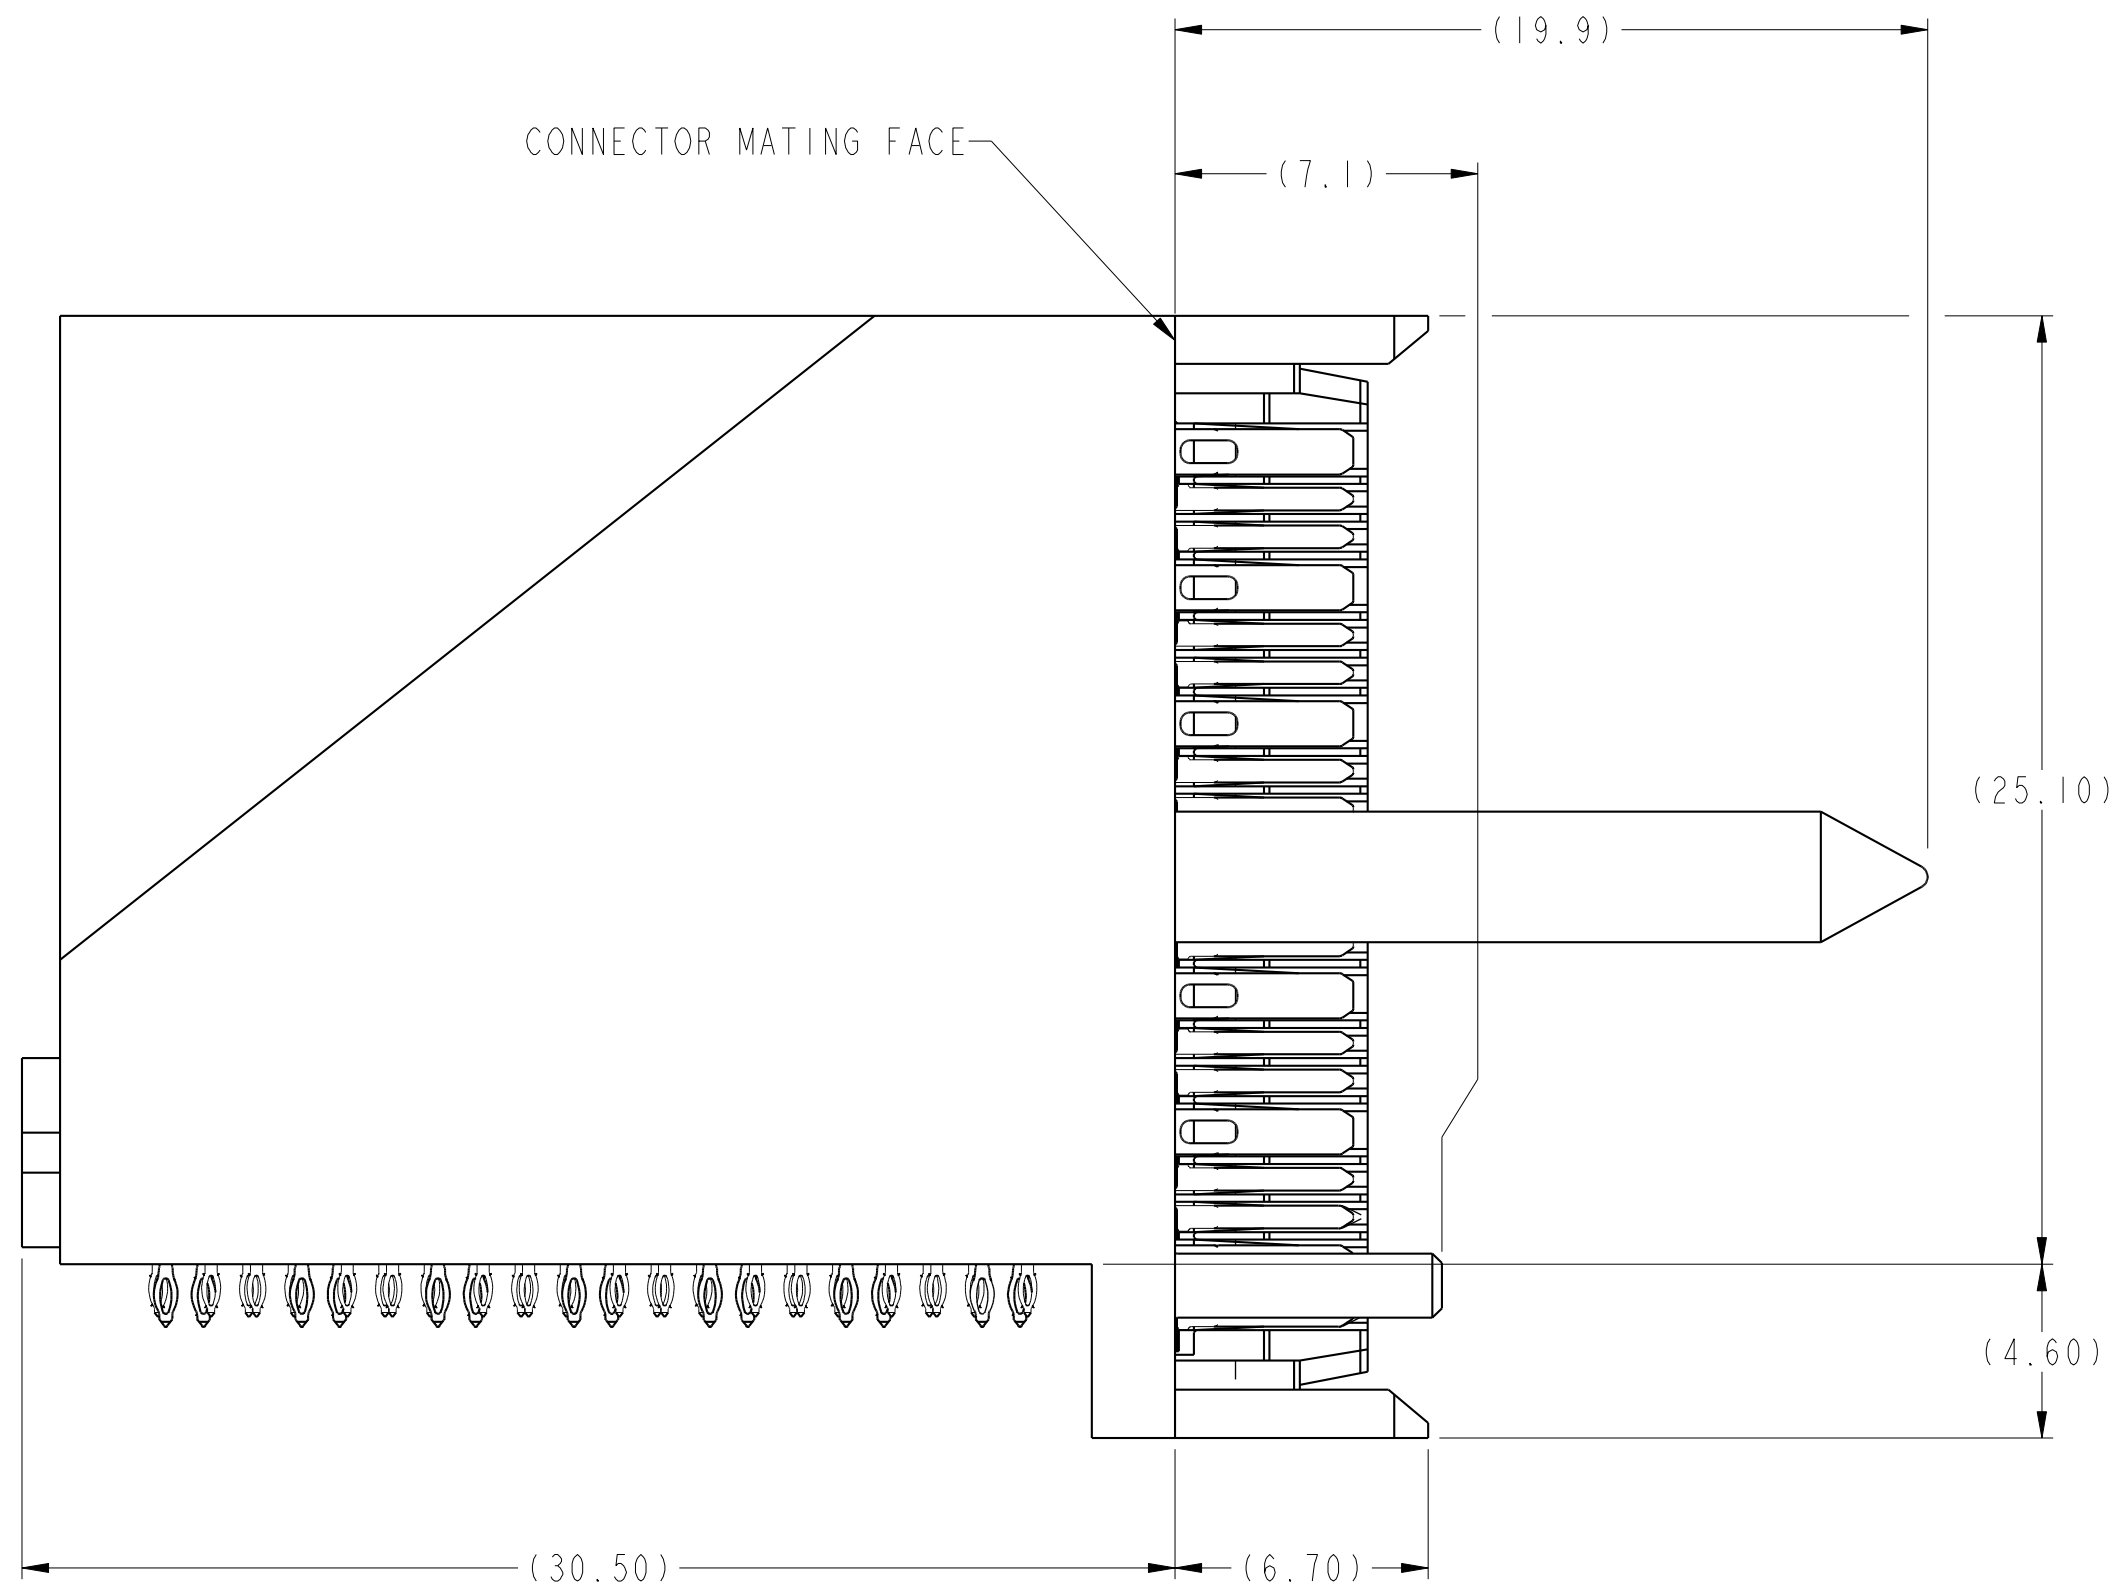
PDS: Rev :B

STATUS:Released

Printed: Dec 13, 2017

Amphenol
FCi

© 2016 AFci




10124560-Y1ALF THRU -Y1JLF
 RIGHT GUIDANCE CONNECTOR (SEE NOTE 17)
 FOR ALL OTHER DIMENSIONS SEE SHEET 1

Amphenol
 FCI

© 2016 AFCI

spec ref	SEE NOTES	dr	Stu Stoner	2013/11/19	projection	MM	size	A2	scale	6:1											
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Norman Luo	2017/11/01			ecn no	ELX-DG-28236-1													
ASME Y14.5M		chr	Justin Chen	2017/11/29			rel level	Released													
		appr	Heaven Cen	2017/11/30			product family	ExaMAX													
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±.3</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±.10</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±.050</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±°</td> </tr> </table>	linear	0.X	±.3		0.XX	±.10		0.XXX	±.050	angular	0°	±°	Amphenol FCI	title ExaMAX RIGHT-ANGLE HDR ASSY 6 PR, 240 POS, 12 IMLA, 2MM			dwg no	10124560		
linear	0.X	±.3																			
	0.XX	±.10																			
	0.XXX	±.050																			
angular	0°	±°																			
			cat. no.	Product - Customer Drw			rev	B													

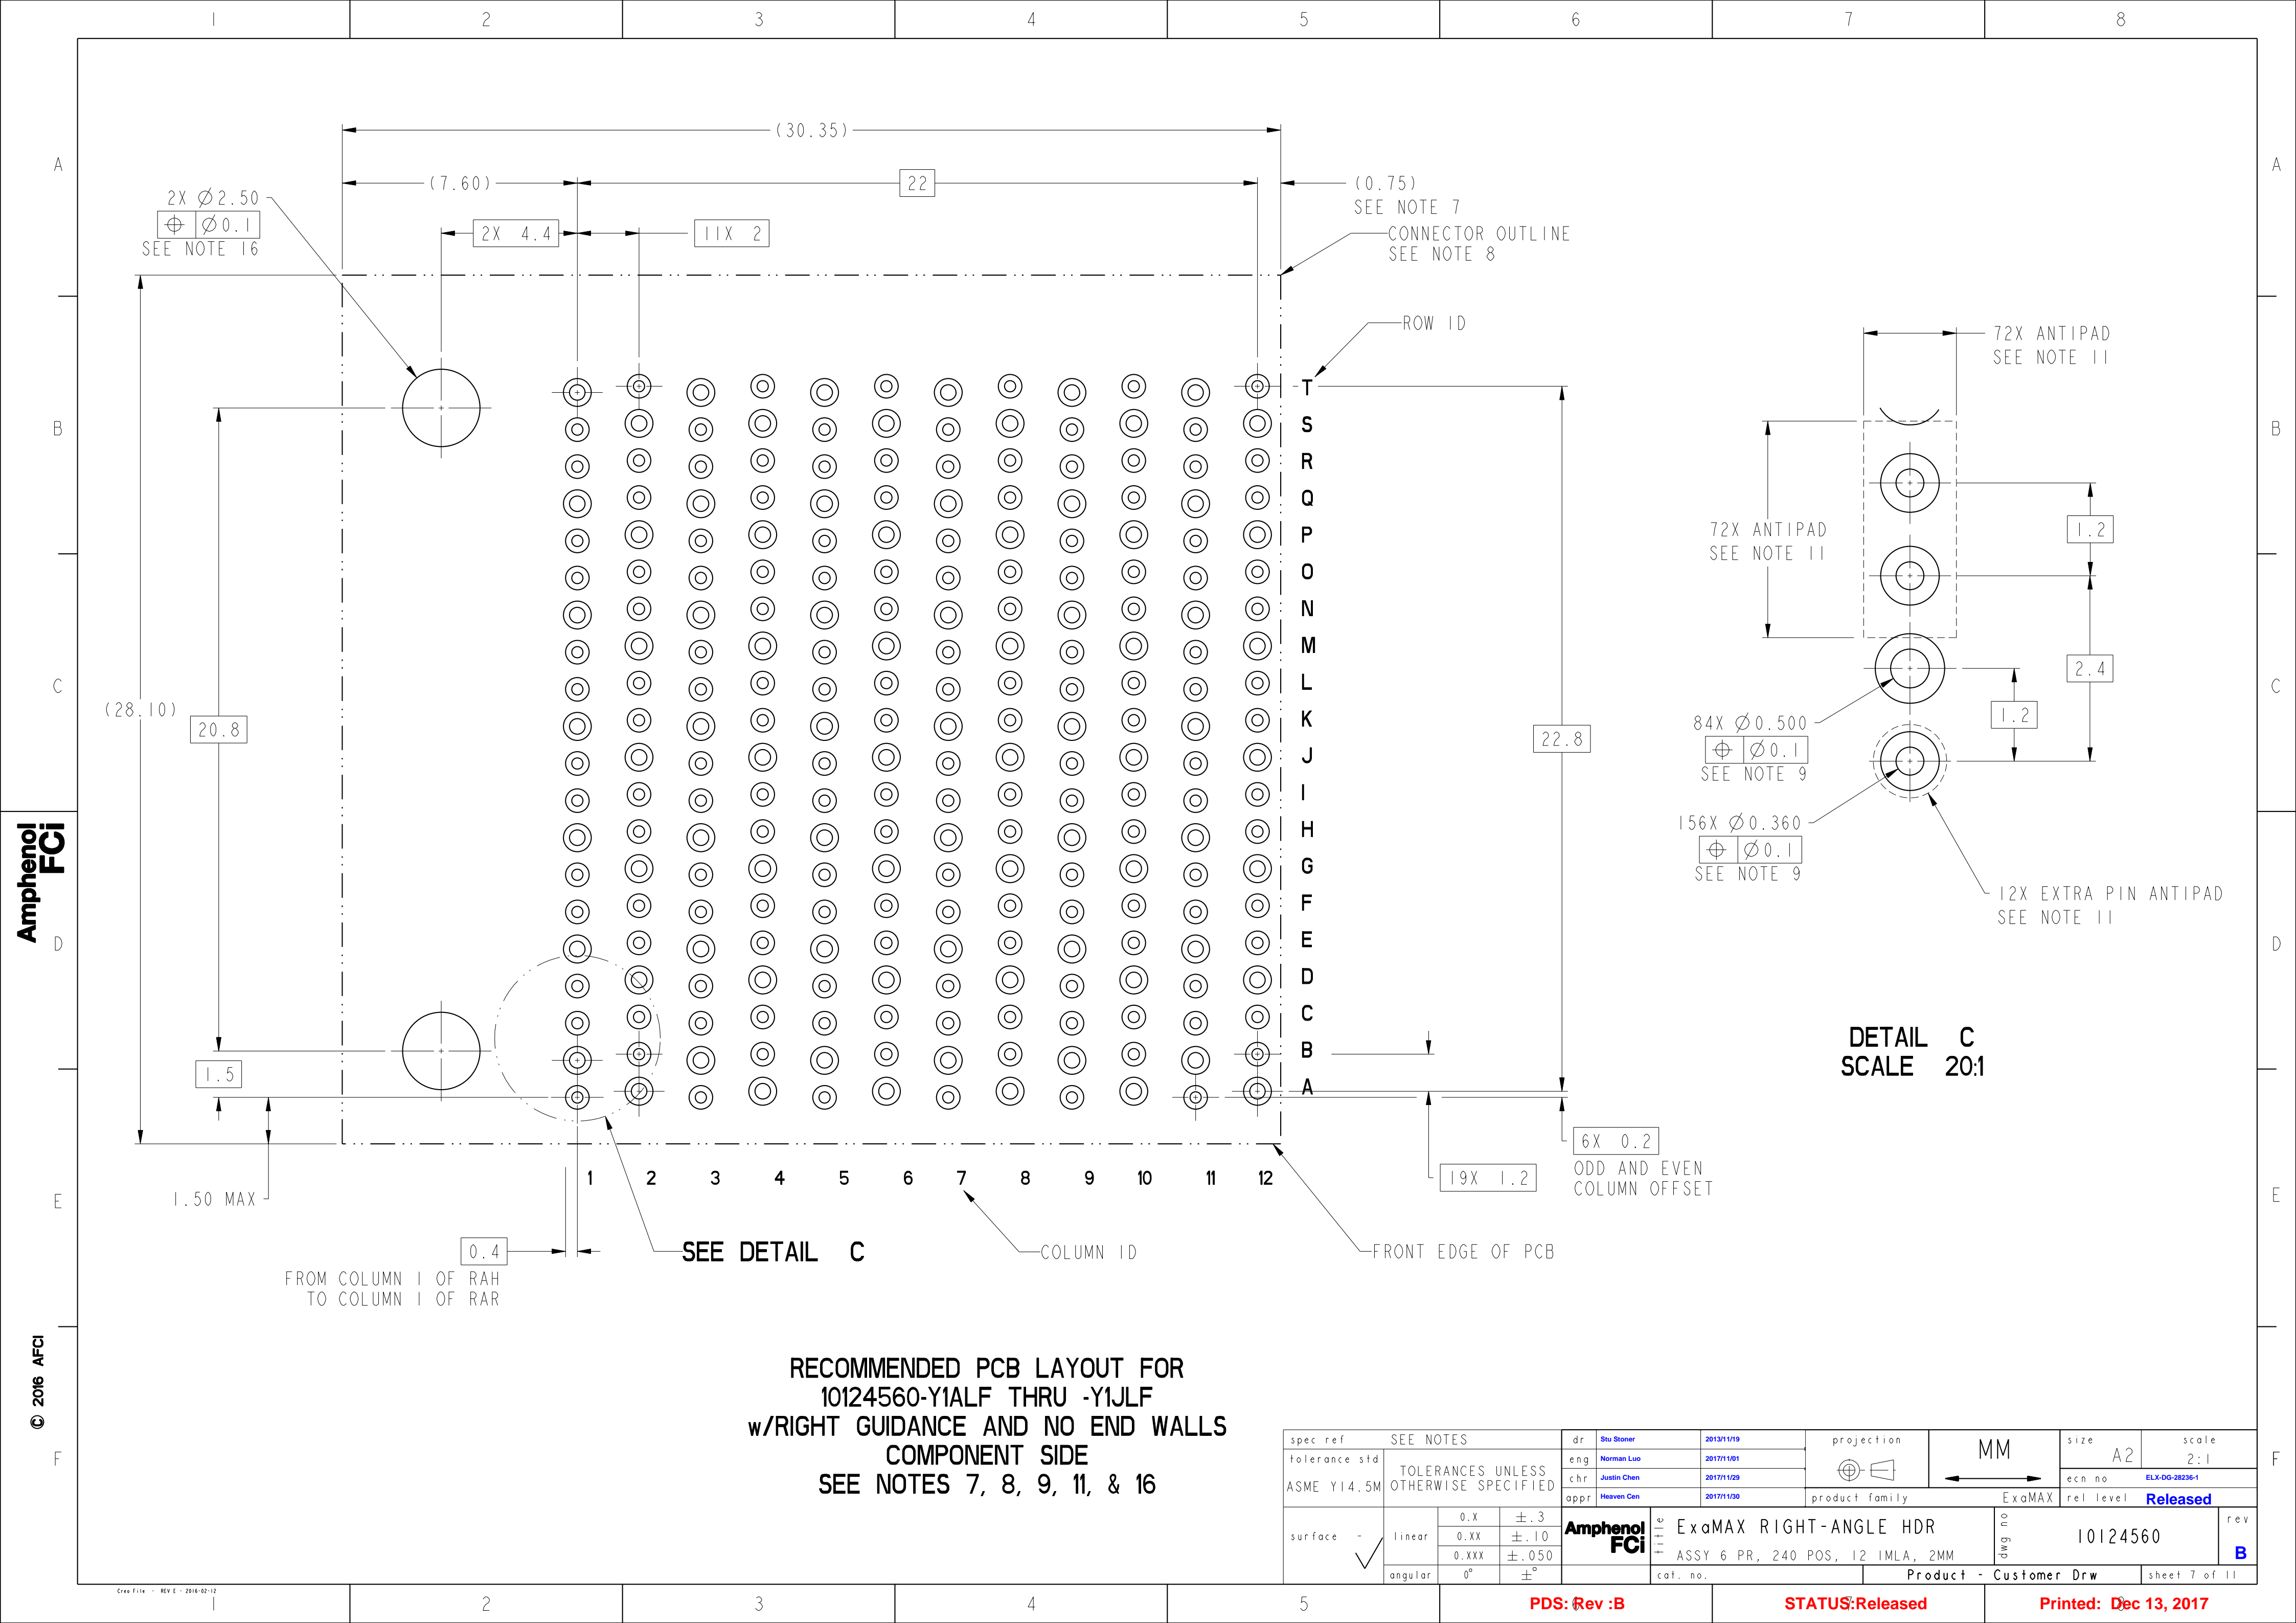

Amphenol FCI

© 2016 AFci

**RECOMMENDED PCB LAYOUT FOR
10124560-Y1ALF THRU -Y1JLF
w/RIGHT GUIDANCE AND NO END WALLS
COMPONENT SIDE
SEE NOTES 7, 8, 9, 11, & 16**

spec ref	SEE NOTES	dr	Stu Stoner	2013/1/19	projection	MM	size	A2	scale	2:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Norman Luo	2017/1/01			ecn no	ELX-DG-28236-1		
ASME Y14.5M		chr	Justin Chen	2017/1/29			rel level	Released		
		appr	Heaven Cen	2017/1/30			product family	ExaMAX		
surface	linear	0.X	±.3		ExaMAX RIGHT-ANGLE HDR ASSY 6 PR, 240 POS, 12 IMLA, 2MM	dng no 10124560	rev B			
		0.XX	±.10							
		0.XXX	±.050							
	angular	0°	±°	cat. no.	Product - Customer Drw			sheet 7 of 11		

PDS: Rev :B

STATUS:Released

Printed: Dec 13, 2017

(28.10)

2X Ø2.50
⊕ Ø0.1
SEE NOTE 16

2X 4.4

11X 2

(30.35)

22

(0.75)
SEE NOTE 7

CONNECTOR OUTLINE
SEE NOTE 8

ROW ID

T
S
R
Q
P
O
N
M
L
K
J
I
H
G
F
E
D
C
B
A

72X ANTIPAD
SEE NOTE 11

72X ANTIPAD
SEE NOTE 11

84X Ø0.500
⊕ Ø0.1
SEE NOTE 9

156X Ø0.360
⊕ Ø0.1
SEE NOTE 9

12X EXTRA PIN ANTIPAD
SEE NOTE 11

**DETAIL C
SCALE 20:1**

22.8

6X 0.2

ODD AND EVEN
COLUMN OFFSET

19X 1.2

COLUMN ID

FRONT EDGE OF PCB

SEE DETAIL C

FROM COLUMN 1 OF RAH
TO COLUMN 1 OF RAR

0.4

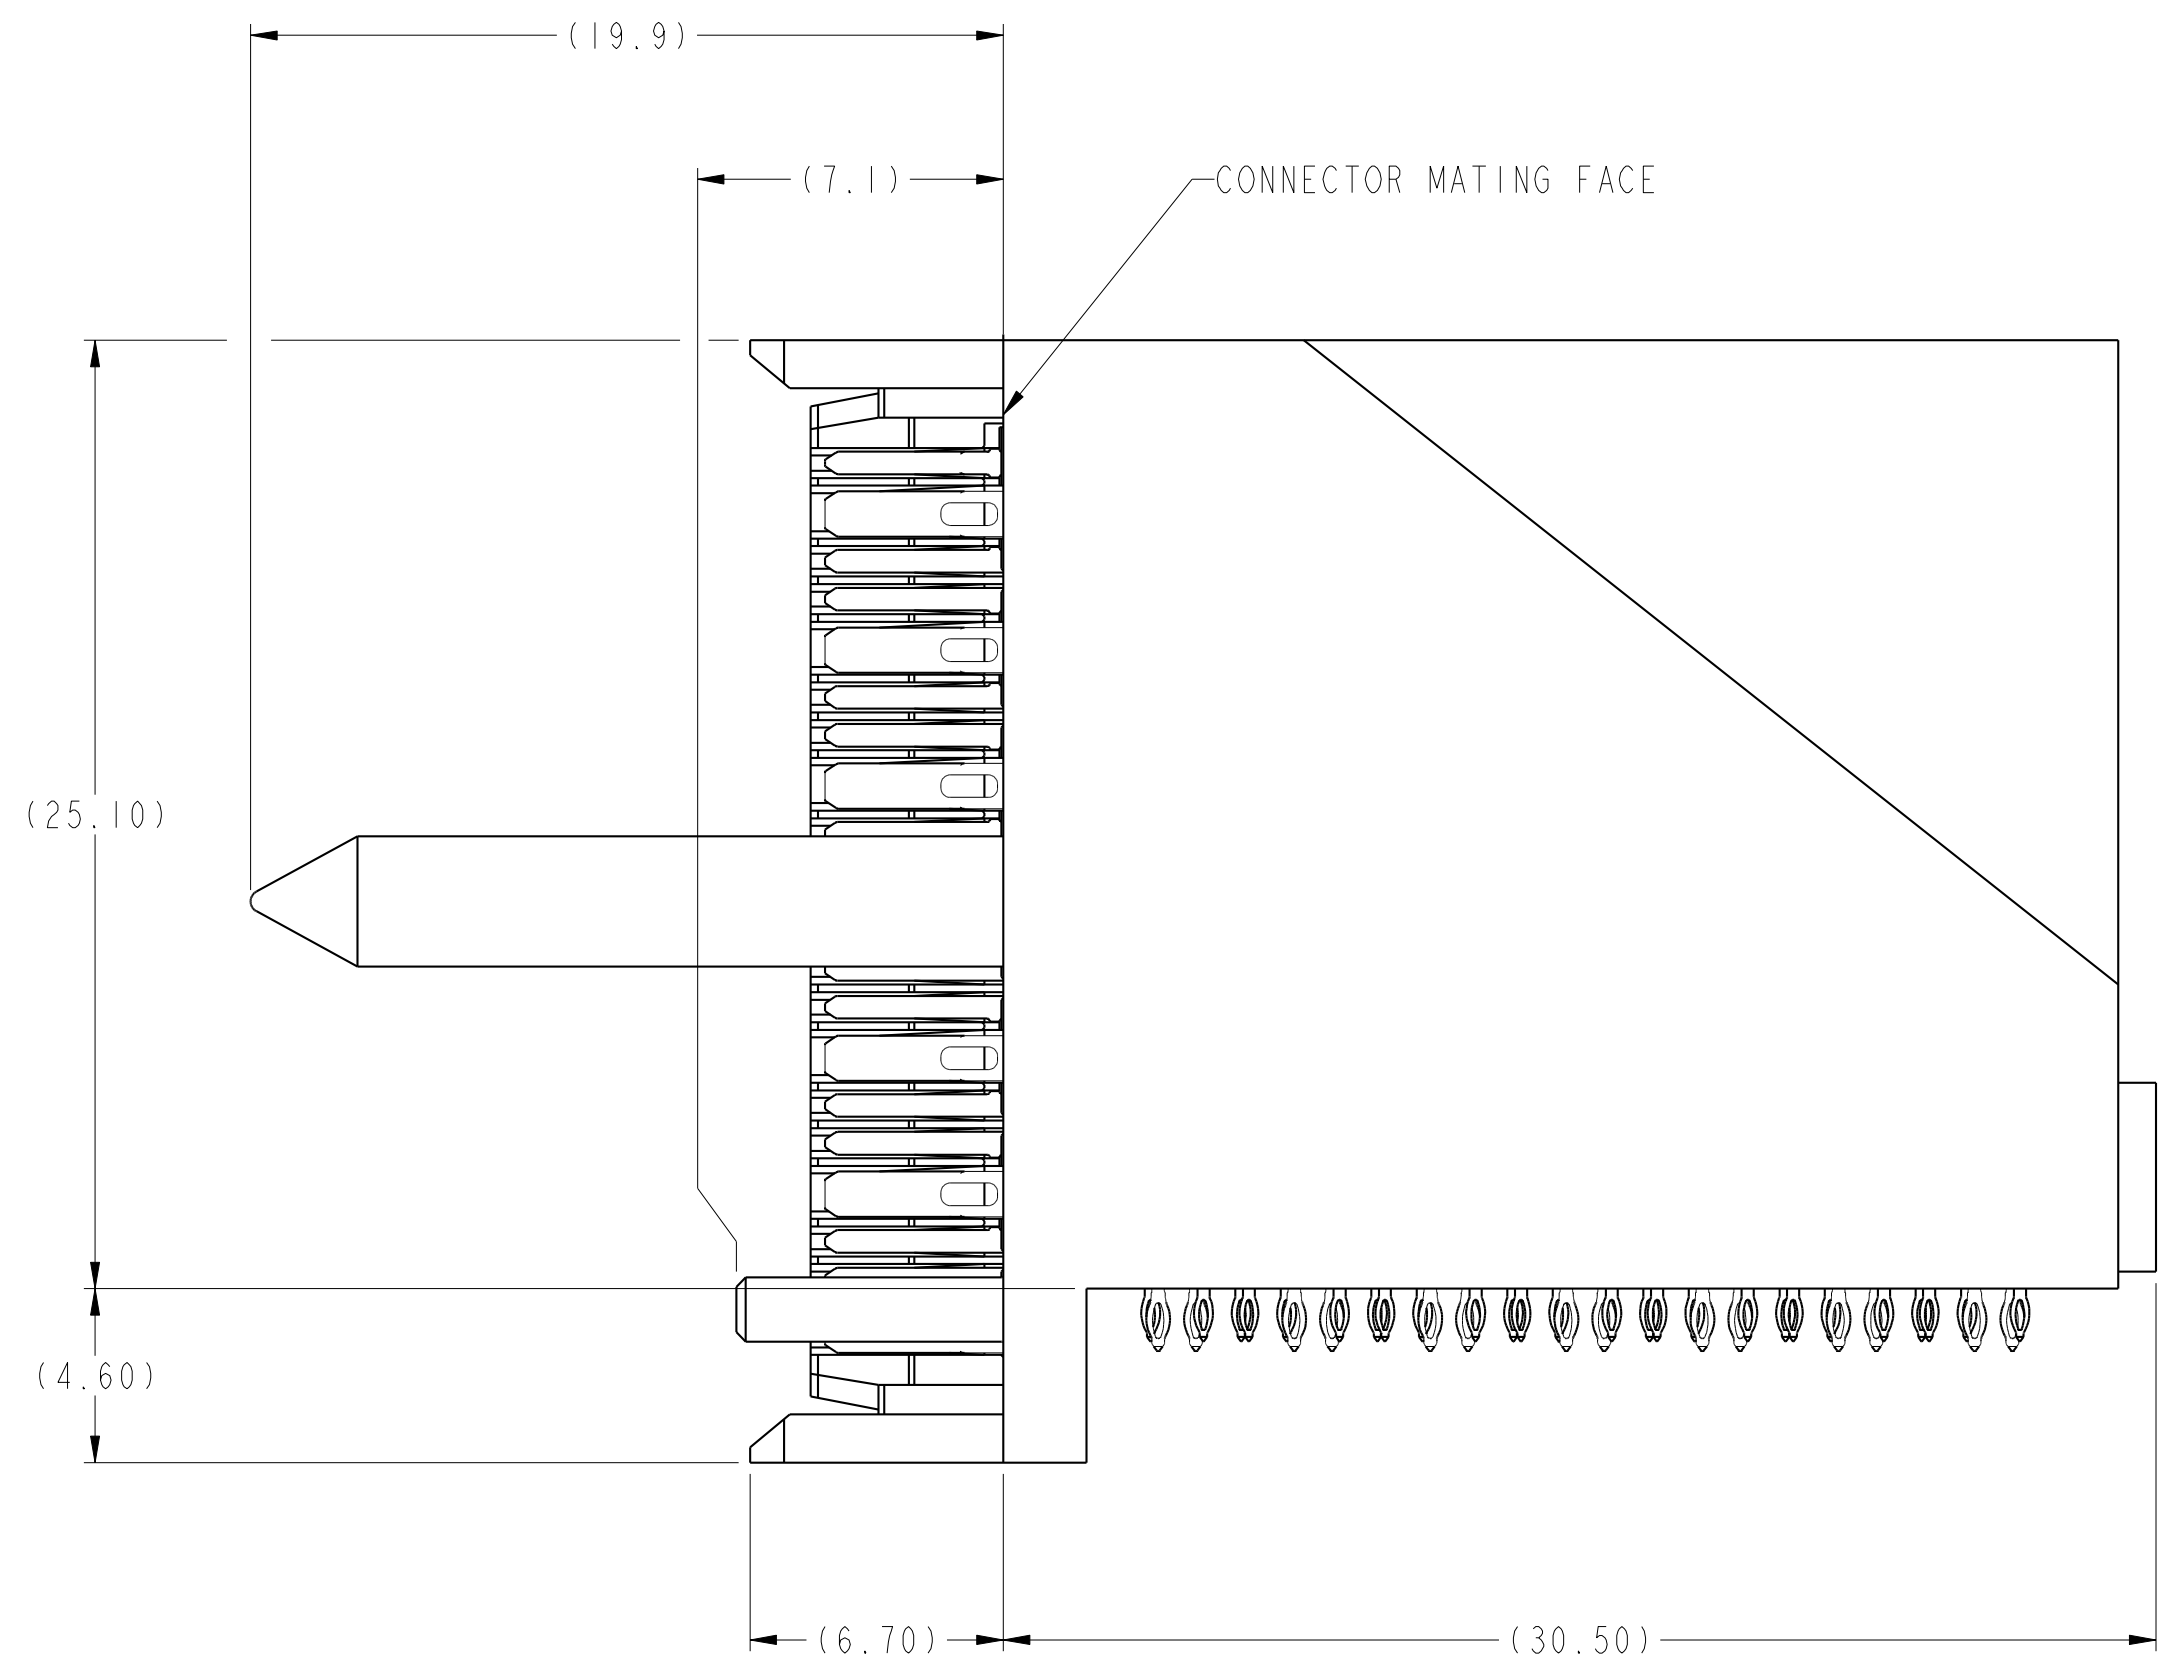
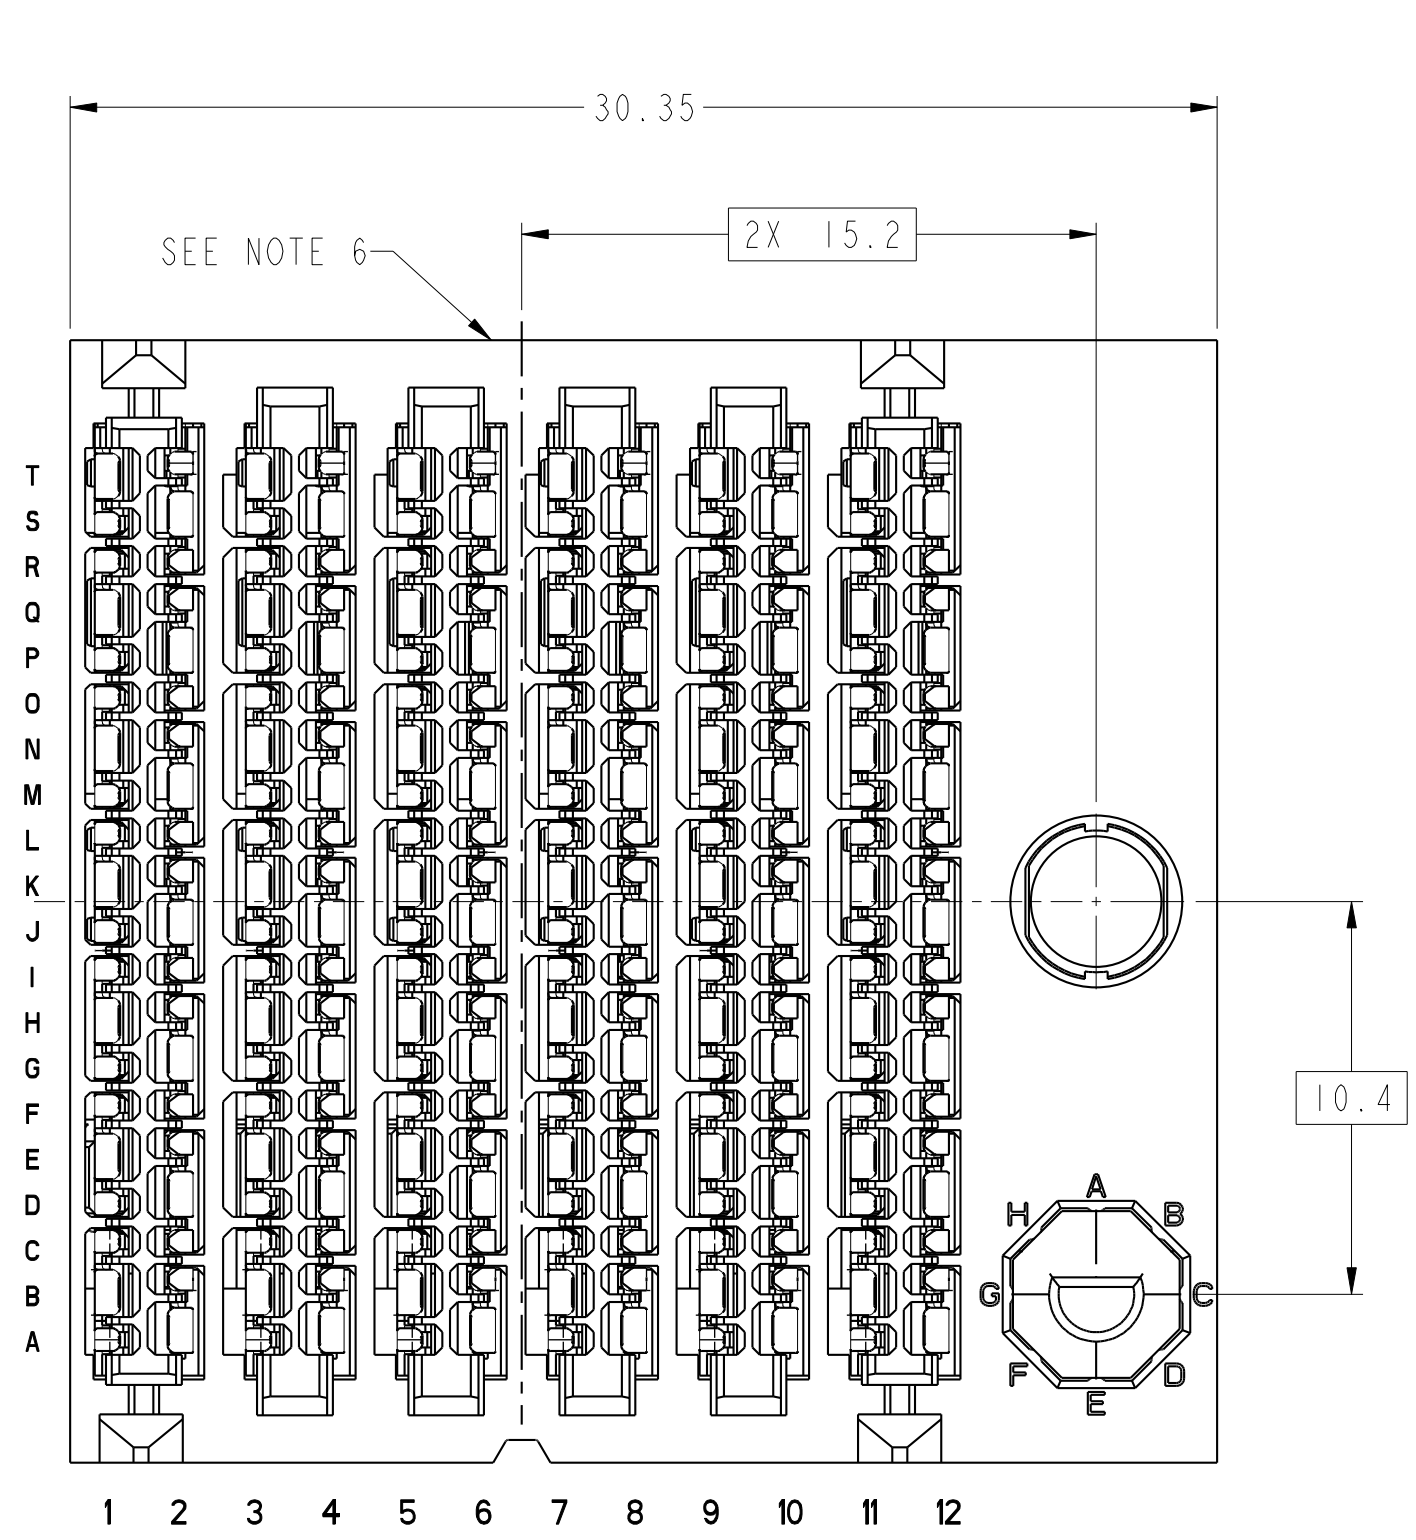
1.50 MAX

1.5

20.8



A
B
C
D
E
F

A
B
C
D
E
F



10124560-Y2ALF THRU -Y2JLF
LEFT GUIDANCE CONNECTOR (SEE NOTE 17)
FOR ALL OTHER DIMENSIONS SEE SHEET 1

spec ref	SEE NOTES	dr	Stu Stoner	2013/11/19	projection	MM	size	A2	scale	6:1												
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Norman Luo	2017/11/01			ecn no	ELX-DG-28236-1														
ASME Y14.5M		chr	Justin Chen	2017/11/29			rel level	Released														
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±.3</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±.10</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±.050</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±°</td> </tr> </table>	linear	0.X	±.3		0.XX	±.10		0.XXX	±.050	angular	0°	±°	appr	Heaven Cen	2017/11/30	product family	ExaMAX	cat. no.	10124560	rev	B
linear	0.X	±.3																				
	0.XX	±.10																				
	0.XXX	±.050																				
angular	0°	±°																				
					title ExaMAX RIGHT-ANGLE HDR ASSY 6 PR, 240 POS, 12 IMLA, 2MM		Product - Customer Draw		sheet 8 of 11													




















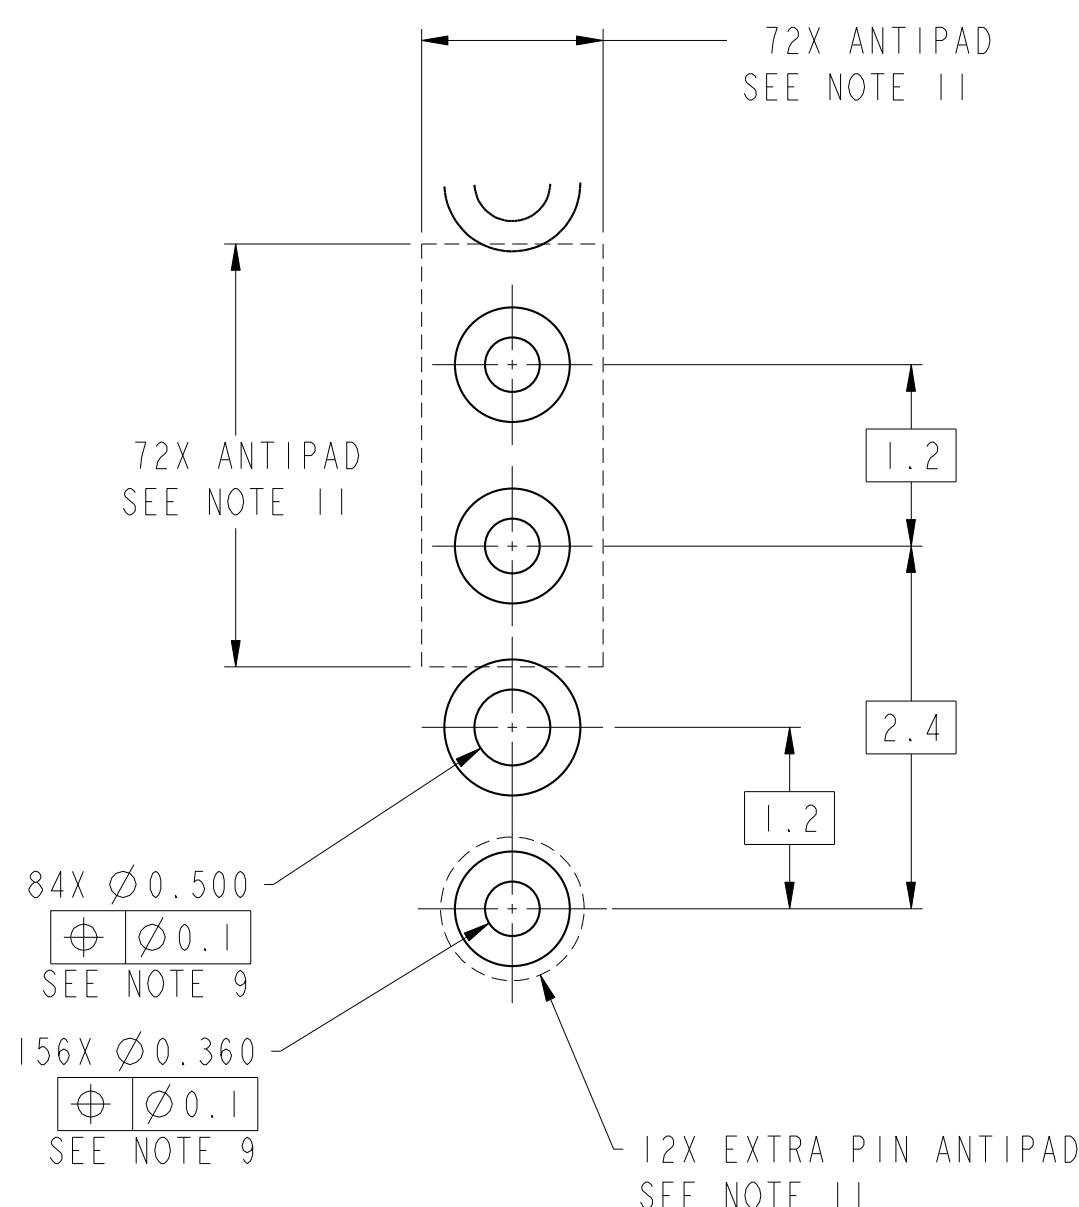
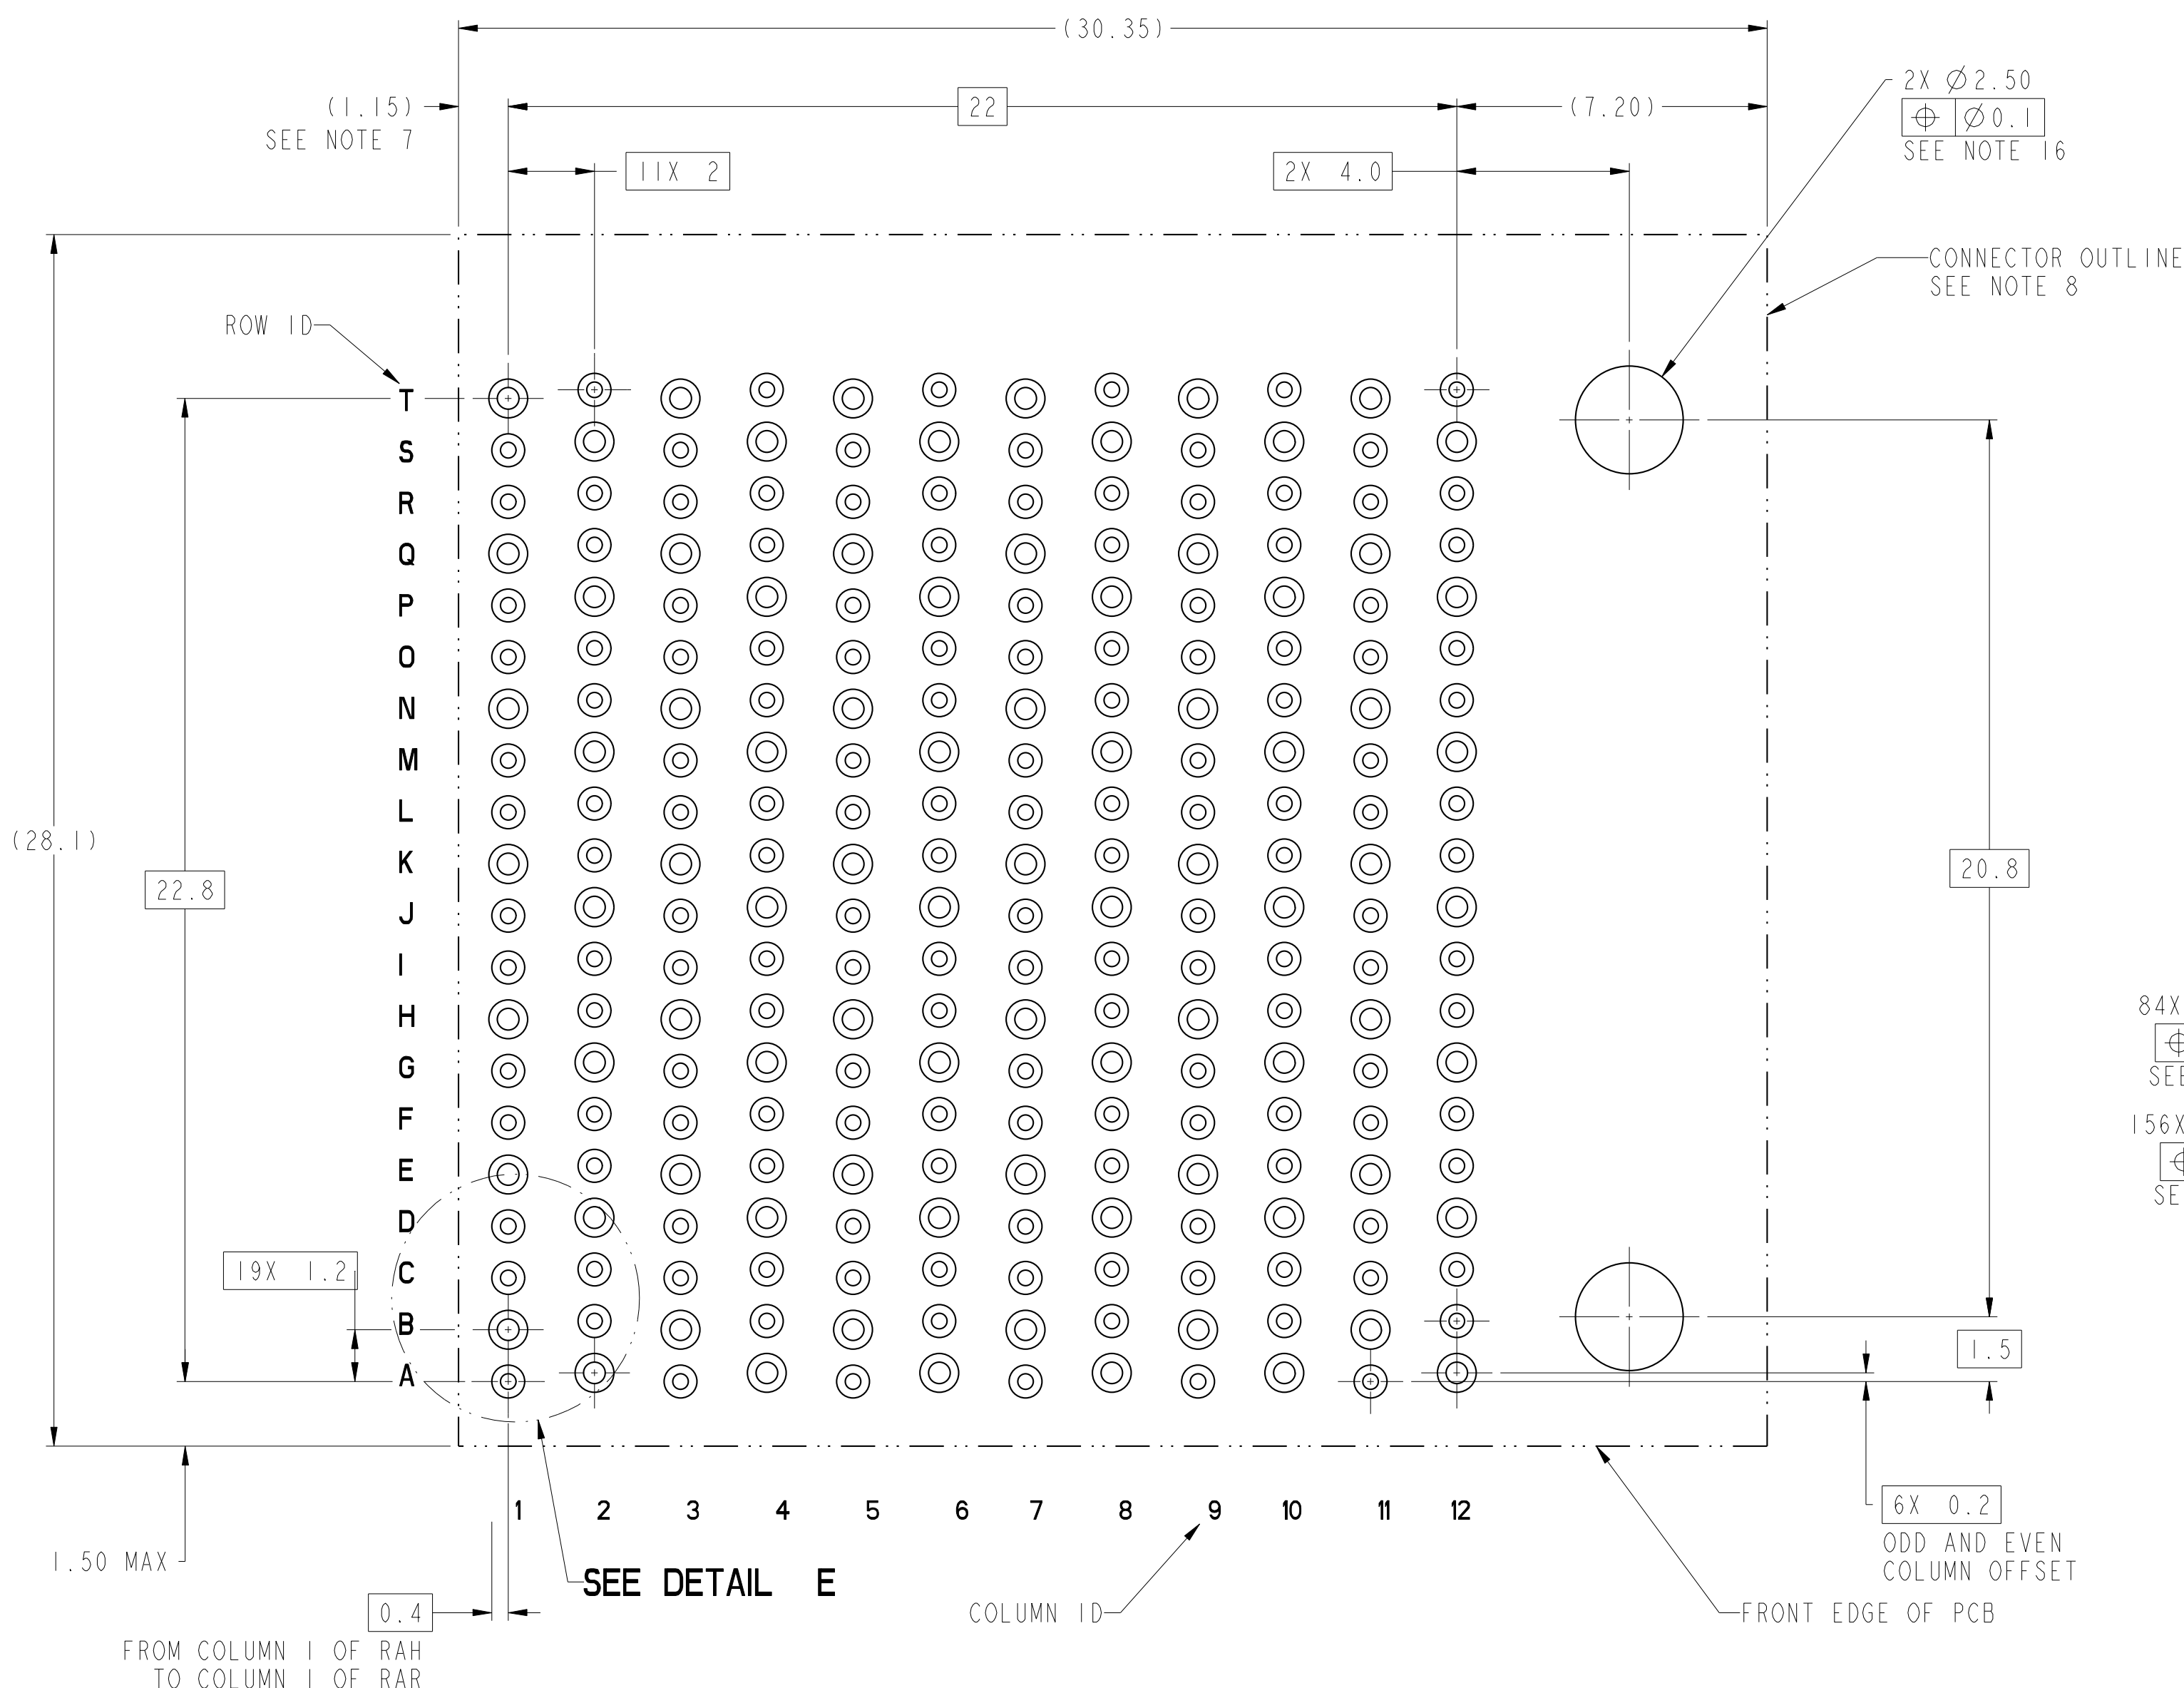


DETAIL E
SCALE 20:1



RECOMMENDED PCB LAYOUT FOR
10124560-Y2ALF THRU -Y2JLF
w/LEFT GUIDANCE AND NO END WALLS
COMPONENT SIDE
SEE NOTES 7, 8, 9, 11, & 16

spec ref	SEE NOTES	dr	Stu Stoner	2013/11/19	projection	MM	size	A2	scale	2:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Norman Luo	2017/11/01			ecn no	ELX-DG-28236-1	rel level	Released
ASME Y14.5M		chr	Justin Chen	2017/11/29						
		appr	Heaven Cen	2017/11/30						
surface	linear	0.X	±.3		product family ExaMAX	title ExaMAX RIGHT-ANGLE HDR ASSY 6 PR, 240 POS, 12 IMLA, 2MM	dwg no 10124560	rev B	cat. no. Product - Customer Drw	sheet 9 of 11
		0.XX	±.10							
		0.XXX	±.050							
	angular	0°	±°							

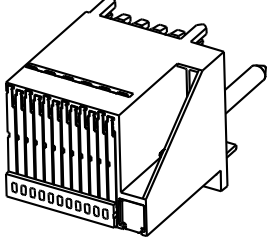10124560 - Y Y Y L F

MODULE DESCRIPTION	DESIGNATION REPRESENTED IN DASH NUMBER										BASE MODULE
STANDARD NO GUIDANCE (SEE SHEET 1)	01										
RIGHT GUIDANCE MODULE (SEE SHEET 6)	1A	1B	1C	1D	1E	1F	1G	1H	1J (NO KEY)		
											
LEFT GUIDANCE MODULE (SEE SHEET 8)	2A	2B	2C	2D	2E	2F	2G	2H	2J (NO KEY)		
											




ASSEMBLY PART NUMBER	DESCRIPTION
10124560-1YYLF	STANDARD MATE
10124560-2YYLF	ADVANCED MATE
10124560-3YYLF	SHORT DETECT
10124560-4YYLF	ADVANCED MATE & SHORT DETECT

spec ref	SEE NOTES	dr	Stu Stoner	2013/11/19	projection	MM	size	A2	scale	1:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Norman Luo	2017/11/01		←→	ecn no	ELX-DG-28236-1	rel level	Released
ASME Y14.5M		chr	Justin Chen	2017/11/29						
		appr	Heaven Cen	2017/11/30						
surface	linear	0.X	±.3		title	ExaMAX RIGHT-ANGLE HDR	cat. no.	Product - Customer Drw	sheet 10 of 11	
✓		0.XX	±.10							
	angular	0°	±°							

NOTES

- ① - CONNECTOR MATERIALS:
HOUSING: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
CONTACT: COPPER ALLOY
ORGANIZER: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
- 2 - CONTACT PLATING:
SEPARABLE INTERFACE:
PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-1096 INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE TEST SEQUENCE

PRESS-FIT TAILS: TIN OVER NICKEL (LEAD FREE)
- 3 - PRODUCT SPECIFICATION: GS-12-1096
- 4 - APPLICATION SPECIFICATION: GS-20-0361
- 5 - PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.
- ⑥ - PRODUCT MARKING, (PART NUMBER & LOT CODE), ON THIS SURFACE.
- ⑦ - THE MINIMUM VIA SPACING BETWEEN STACKED CONNECTORS WILL BE 2.0 mm OR 3.0 mm AS DEFINED BY NOTE 7 ON THE MATING RECEPTACLE CUSTOMER DRAWING. REFER TO THE APPLICATION SPECIFICATION FOR DETAILS.
- ⑧ - CONNECTOR OUTLINE MAY BE SCREEN PRINTED ONTO CUSTOMER PCB TO BE USED AS A GUIDE FOR MANUAL CONNECTOR PLACEMENT.
- ⑨ - REFER TO CUSTOMER DRAWING 10119933 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS
- 10- THIS PRODUCT MEETS THE EUROPEAN UNION DIRECTIVES & OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004
- ⑪ - REFER TO ROUTING GUIDE GS-20-0511 FOR RECOMMENDATIONS ON OPTIMIZATION OF FOOTPRINT AND TRACE ROUTING LAYOUT.
- 12- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10-30 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- ⑬ - THE ADVANCED MATE HEADER, 10124560-2YYLF, WHEN MATED WITH AN ADVANCED MATE RECEPTACLE WILL PROVIDE 2 PAIRS OF MATING CONTACTS THAT MATE 0.75MM BEFORE THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.
- ⑭ - THE SHORT DETECT HEADER, 10124560-3YYLF, WHEN MATED WITH A STANDARD MATE RECEPTACLE WILL PROVIDE 1 PAIR OF MATING CONTACTS THAT MATE 1.00 MM AFTER THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.
- ⑮ - THE ADVANCED MATE/SHORT DETECT HEADER, 10124560-4YYLF, WHEN MATED WITH AN ADVANCED MATE RECEPTACLE WILL PROVIDE 2 PAIRS OF MATING CONTACTS THAT MATE 0.75 MM BEFORE THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS AND 1 PAIR OF MATING CONTACTS THAT MATE 1.00 MM AFTER THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.
- ⑯ - FOR CONNECTORS WITH EITHER A RIGHT OF LEFT GUIDE MODULE, TWO PHILLIPS PAN HEAD M2 HOLD-DOWN SCREWS MUST BE USED TO SECURE THE CONNECTOR TO THE PCB. THE SCREW LENGTH SHALL BE 2.0-6.0mm PLUS THE THICKNESS OF THE PCB BOARD. SCREWS ARE NOT PROVIDED WITH THE CONNECTOR.
- ⑰ - LEFT / RIGHT INTEGRATED GUIDE ORIENTATION IS DETERMINED BY THE LOCATION OF THE GUIDE FEATURE WHEN LOOKING AT THE MATING FACE OF THE RIGHT ANGLE RECEPTACLE THAT IT MATES WITH(i. e. A RIGHT GUIDE RIGHT ANGLE HEADER MATES WITH A RIGHT GUIDE RIGHT ANGLE RECEPTACLE.)
- ⑱ - ALL GROUND CONTACTS ARE COMMONED WITHIN A COLUMN.

spec ref	SEE NOTES	dr	Stu Stoner	2013/1/19	projection	MM	size	A2	scale	2:1													
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Norman Luo	2017/1/01			ecn no	ELX-DG-28236-1															
ASME Y14.5M		chr	Justin Chen	2017/1/29			rel level	Released															
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±.3</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±.10</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±.050</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±°</td> </tr> </table>	linear	0.X	±.3		0.XX	±.10		0.XXX	±.050	angular	0°	±°	appr	Heaven Cen	2017/1/30	product family	ExaMAX	cat. no.	10124560		rev	B
linear	0.X	±.3																					
	0.XX	±.10																					
	0.XXX	±.050																					
angular	0°	±°																					
					title ExaMAX RIGHT-ANGLE HDR ASSY 6 PR, 240 POS, 12 IMLA, 2MM		Product - Customer Draw		sheet 11 of 11														

Amphenol FCI

© 2016 AFCI

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[10124560-11JLF](#)