


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	5961002721	~

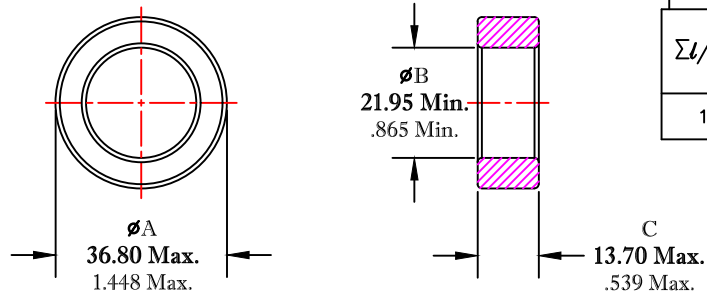

AFTER COATING

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS							
$\Sigma L/A(mm^{-1})$	$l_e (mm)$	$A_e (mm^2)$	$V_e (mm^2)$	$L_o (nH)$	$A_L (nH)$ @ 10 kHz <10gauss	$\tan \delta/\mu_1$ @ 1 MHz 1gauss	$\tan \delta/\mu_1$ @ 10 MHz 1gauss
1.1398	89.0	78.1	6959	1.102	140±25%	≤75X10E-6	≤350X10E-6
N = 15							

NOTES:

- 1 - THIS PART TO BE THERMOSET PLASTIC COATED, USE APPROVED FR# 5961002701.
- 2 - COATED TOROID TO WITHSTAND A MINIMUM BREAKDOWN VOLTAGE OF 1000 Vrms, WHEN UNIFORMLY APPLIED ACROSS THE "C" DIMENSION.
- 3 - COATING THICKNESS = 0.25mm (.010") Max.

FR# 61

FAIR-RITE PRODUCTS CORP.					
TITLE COATED TOROID					
DRAWN BY J.SERENCSICS	DATE 07-17-2018	SIZE	PART NO.	REV.	
CHKD BY		B	5961002721	~	
APPRVD BY		SCALE	NONE	SHEET 1 of 1	