

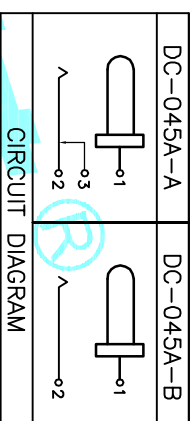


Model No.	1	2
PIN	$\phi 1.0$	$\phi 1.3$



P.C.B LAYOUT(Copper-side view)

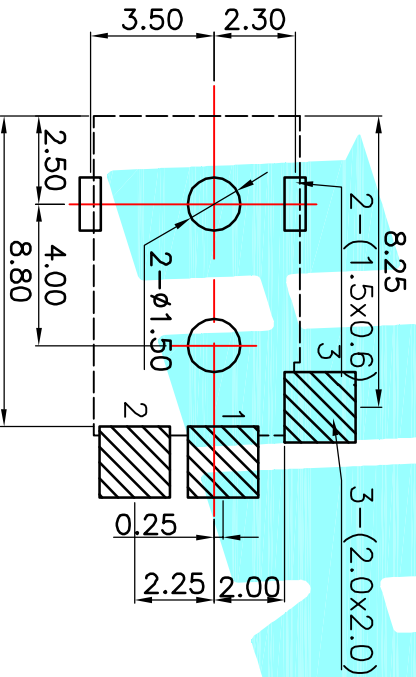

DC MATE PLUG

Rating:0.5A 30V DC
 Contact Resistance:100 m Ω Max.
 Operating temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C
 Operating force:3~20N
 Operating Life:5,000cycles

② Terminal	3	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM PART NAME	TERN.O. QTY.	MATERIAL	FINISHING
APPROVALS	DATE		

DRAWN J.X.Zhang 2013/11/11

ELECTRONICS CO.,LTD



CHECKED

TITLE: PHONE JACKES

APPROVALS

PART NO. DC-045A

TOLERANCES ARE

30 \pm 0.15
 10 \pm 0.30
 5 \pm 0.10
 ~ 5 \pm 0.10

ANGLE $\pm 2^{\circ}$

UNIT: mm

SCALE: 1:1

ECN NO.

REV. A

DATE.

DESCRIPTION. NEW

CHANGE.

CHECK.

APPRO.

PROJ. SHEET 1 OF 1