


- SPECIFICATIONS:**
- ELECTRICAL CHARACTERISTICS:**
 - RATING: 20V, 7A Min.
 - CONTACT RESISTANCE: 50 MILLIOHMS Max. FOR INITIAL, 80 MILLIOHMS Max. AFTER 5000 CYCLES.
 - INSULATION RESISTANCE: 100 MEGAOHMS Min. BY 500V DC AFTER 1 MINUTE.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V RMS AFTER 1 MINUTE.
 - MECHANICAL CHARACTERISTICS:**
 - INSERTION FORCE : 0.3~3.0 KGF(2.94~29.4N)
 - WITHDRAWAL FORCE : 0.3~3.0 KGF(2.94~29.4N)
 - LIFE TEST:** 5,000 CYCLES MIN.



ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TERMINALS	TOLERANCES ARE	APPROVALS	CHECKED	TITLE	PART NO.	DC-192G
	A		NEW				① Terminal Housing	30~0.15 10~0.30 5~10 ~5			DC PLUG		
							② Part Name	±0.30					
							③ Date	±0.20					
							Material	±0.15					
							Finishing	±2°					
							Remark						
							Scale						
							Unit						
							Drawing No.						
							Sheet						

DRAWN	JKUNLU	2013/11/11	DATE
APPROVALS			
CHECKED			
APPROVALS			
COPPER			
NI PLATING			
BLACK			
REMARK			

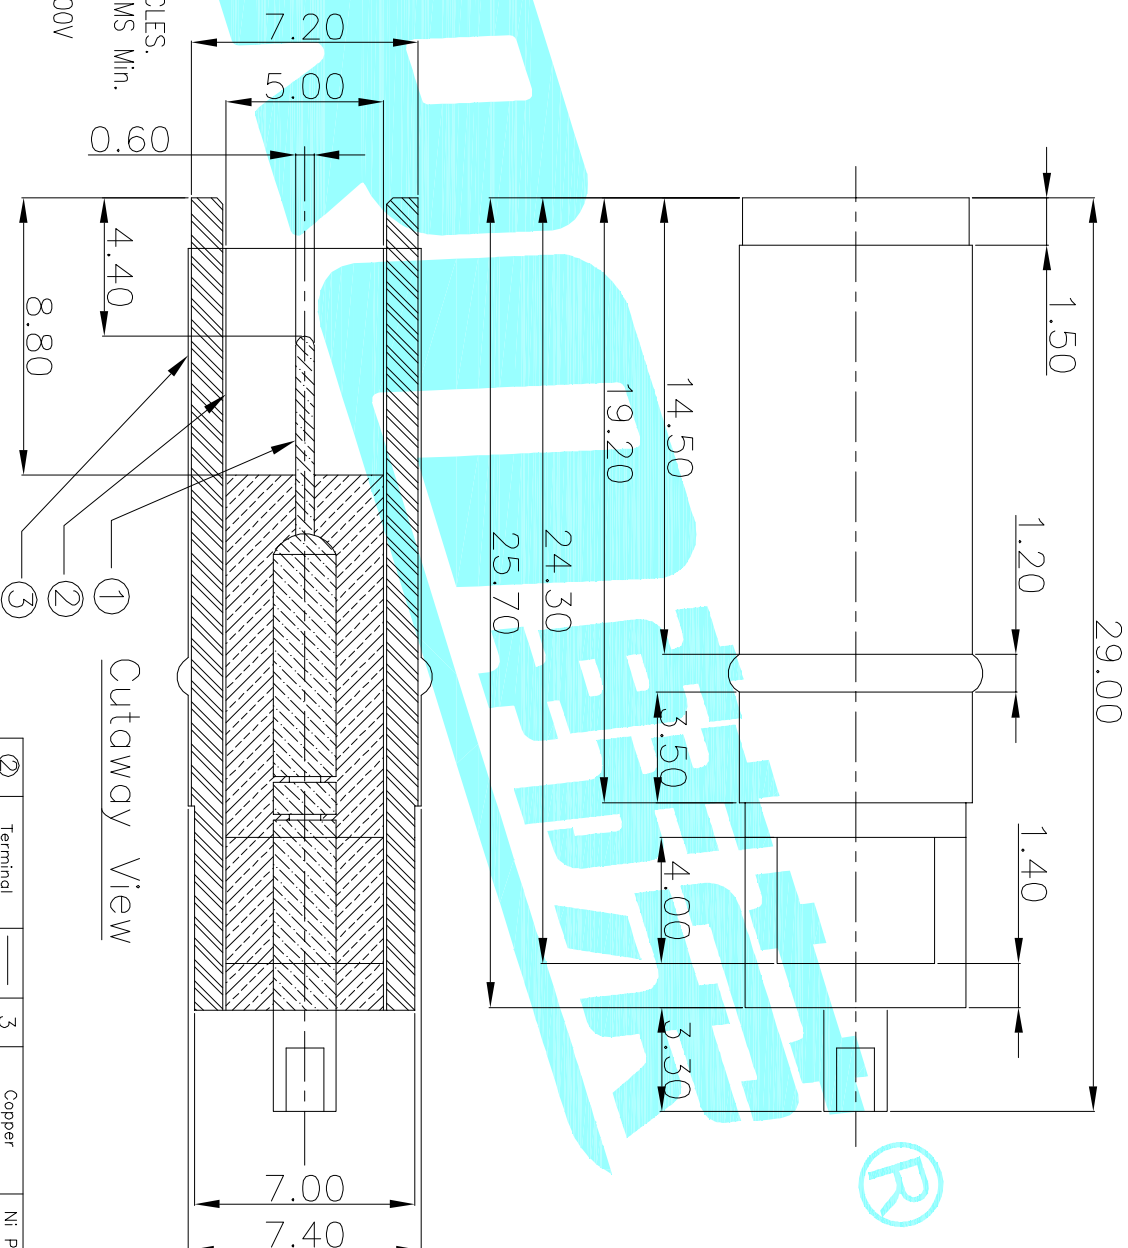

HRO ELECTRONICS CO.,LTD