
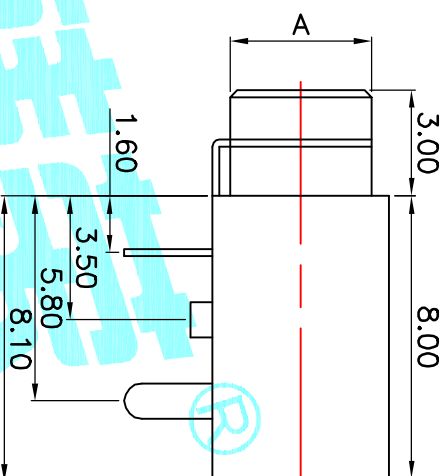


P.C.B LAYOUT(copper-sided view)

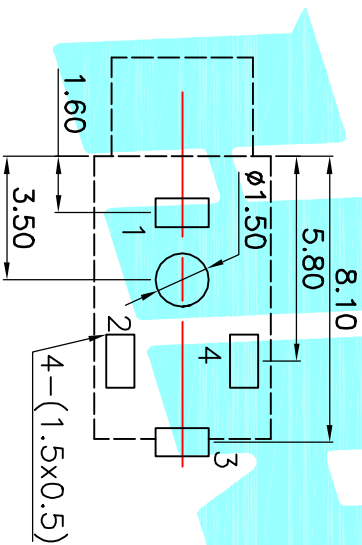

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:−20℃~70℃  
 Operating force:3–20N  
 Operating Life:5,000cycles

Model NO	A=φ4	PJ-2100B-A	PJ-2100B-B
	A=φ5	PJ-2100C-A	PJ-2100C-B
Schematic			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
<p>DRAWN J.X.Zhang 2013/11/11</p> <p>CHECKED</p> <p>APPROVALS</p> <p>TOLERANCES ARE 30<sup>±0.15</sup> 10<sup>±0.20</sup> 5<sup>±0.10</sup> ±0.30 ±0.20 ±0.15 ±Z</p>						
TITLE: PHONE JACKES			PART NO. PJ-2100B			
SCALE: 1:1			PROJ. SHEET 1 OF 1			
<p>APPROVALS</p> <p>DATE</p> <p>TERMINAL</p> <p>HOUSING</p> <p>PART NAME</p> <p>TERNO. QTY.</p> <p>MATERIAL</p> <p>FINISHING</p> <p>REMARK</p>						
<p>PHOSPHOR BRONZE Au PLATING</p> <p>NYLON</p> <p>BLACK</p>						
<p>ELECTRONICS CO.,LTD</p>						