



8-(1.4X0.5)

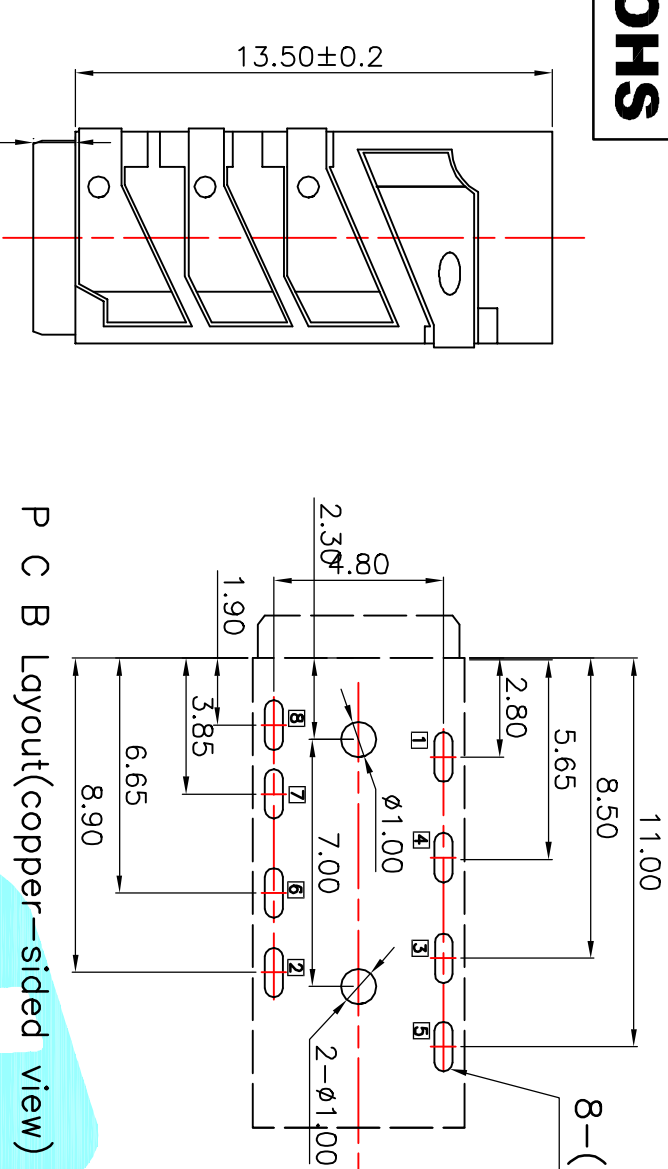

P C B Layout(copper-sided view)

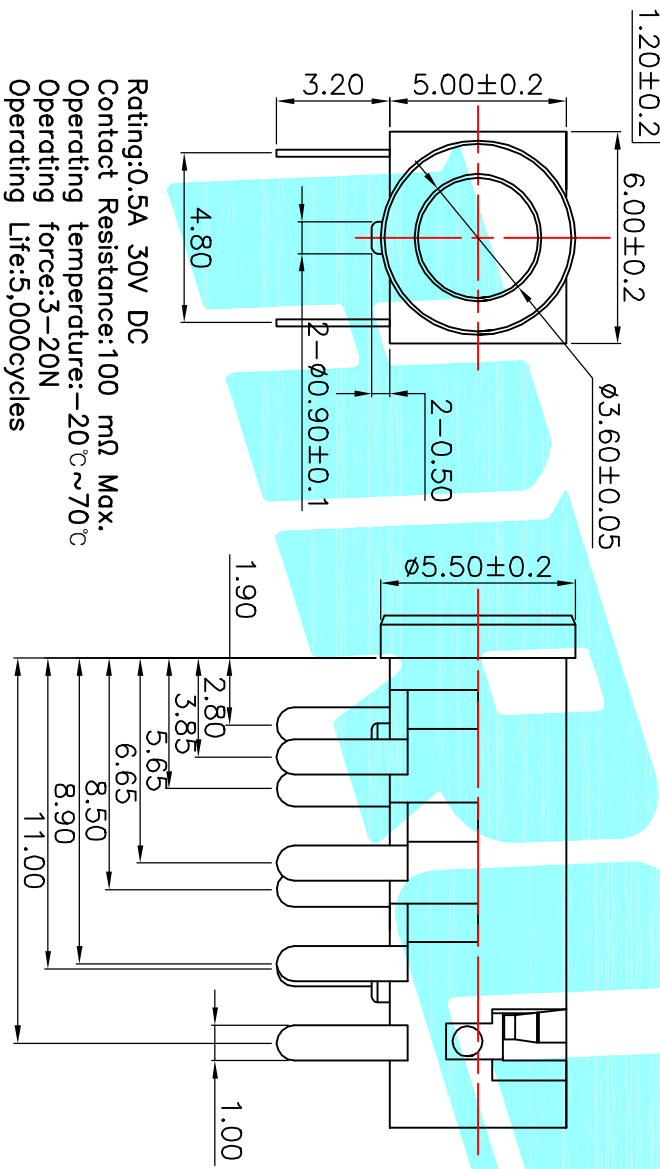

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

Model No.	PJ-3930-A	PJ-3930-B	PJ-3930-C
Schematic			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
<p>DRAWN J.X.Zhang 2013/6/22</p> <p>CHECKED</p> <p>APPROVALS</p> <p>TOLERANCES ARE 30%以上 ±0.30 ANGLE 10~30 ±0.20 5~10 ±0.15 ±Z DRAWING NO. SHEET 1 OF 1</p>						
TITLE: PHONE JACKS			PART NO. PJ-3930-8A			
DRAWN J.X.Zhang 2013/6/22			DATE			
ELECTRONICS CO.,LTD			MATERIAL Nylon			
PHOSPHOR BRONZE			FINISHING Au Plating			
NYLON			REMARK			