


### P.C.B LAYOUT

- Specifications
1. Rating : AC\DC 30V 1.0A
  2. Dielectric withstanding: 250V(AC) for 1min
  3. Contact Resistance : 50mΩMax
  4. Insulation Resistance: 500MΩ Min
  5. Operating Temperature Range: -20°C+85°C
  6. Operating Life: 5,000Cycles
  7. IP Rating: IPX6

### PART NO.

U-E-M5DW-W-1      U-E-M5DW-W-2

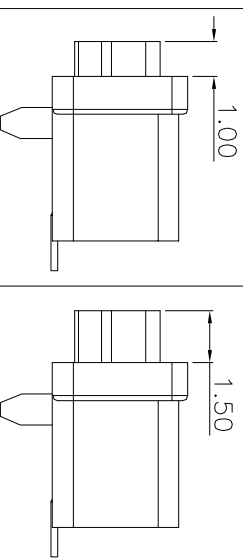

Contact Number	Signal Name	Remarks
1	VBUS	Power
2	D-	Date-
3	D+	Date+
4	ID	Reserve or Gound
5	GND	Gound

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Shell	---	1	SUS	Ni Plated	---
②	Contact	---	5	Phosphor Bronze	Au/Ni Plated	---
①	Housing	---	1	Nylon	Black	---



ELECTRONICS CO.,LTD

USB CONNECTOR

DRAWN JKUN.LU 2015/5/29 TITLE: USB CONNECTOR

CHECKED APPROVALS PART NO. U-E-M5DW-W-□

TOLERANCES ARE 30~以上 ±0.30 ANGLE UNIT: mm SCALE: 1:1 PROJ: SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
---	A	---	NEW	---	---	---