


TO-220F Plastic-Encapsulate Voltage Regulator

CJ7915F Three-terminal negative voltage regulator

FEATURES

- Maximum output current
 I_{OM} : 1.5 A
- Output voltage
 V_O : -15 V
- Continuous total dissipation
 P_D : 1.5 W ($T_a = 25^\circ\text{C}$)

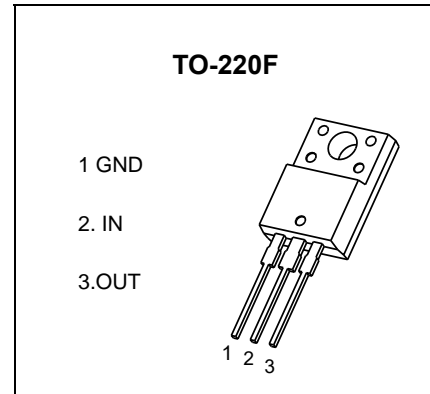

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


Parameter	Symbol	Value	Unit
Input Voltage	V_i	-35	V
Thermal Resistance from Junction to Air	$R_{\theta JA}$	83.3	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_{OPR}	-40~+125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65~+150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i = -23\text{V}$, $I_o = 500\text{mA}$, $C_i = 2.2\mu\text{F}$, $C_o = 1\mu\text{F}$, unless otherwise specified)







Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$T_J = 25^\circ\text{C}$	-14.55	-15	-15.45	V
		$-17.5\text{V} \leq V_i \leq -30\text{V}$, $I_o = 5\text{mA} - 1\text{A}$	-14.25	-15	-15.75	V
Load Regulation	ΔV_o	$I_o = 5\text{mA} - 1.5\text{A}$, $T_J = 25^\circ\text{C}$		15	200	mV
		$I_o = 250\text{mA} - 750\text{mA}$, $T_J = 25^\circ\text{C}$		5	75	mV
Line Regulation	ΔV_o	$-17.5\text{V} \leq V_i \leq -30\text{V}$, $T_J = 25^\circ\text{C}$		5	100	mV
		$-20\text{V} \leq V_i \leq -26\text{V}$, $T_J = 25^\circ\text{C}$		3	50	mV
Quiescent Current	I_q	$T_J = 25^\circ\text{C}$		2	3	mA
Quiescent Current Change	ΔI_q	$-17.5\text{V} \leq V_i \leq -30\text{V}$			0.5	mA
	ΔI_q	$5\text{mA} \leq I_o \leq 1\text{A}$			0.5	mA
Output Noise Voltage	V_N	$10\text{Hz} \leq f \leq 100\text{KHz}$, $T_J = 25^\circ\text{C}$		375		$\mu\text{V}/V_o$
Output Voltage Drift	$\Delta V_o / \Delta T$	$I_o = 5\text{mA}$		-1		$\text{mV}/^\circ\text{C}$
Ripple Rejection	RR	$-18.5\text{V} \leq V_i \leq -28.5\text{V}$, $f = 120\text{Hz}$	54	60		dB
Dropout Voltage	V_d	$I_o = 1\text{A}$, $T_J = 25^\circ\text{C}$		1.1		V
Peak Current	I_{pk}	$T_J = 25^\circ\text{C}$		2.1		A

* Pulse test.


TYPICAL APPLICATION

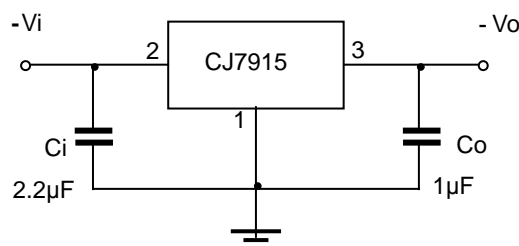

Typical Characteristics

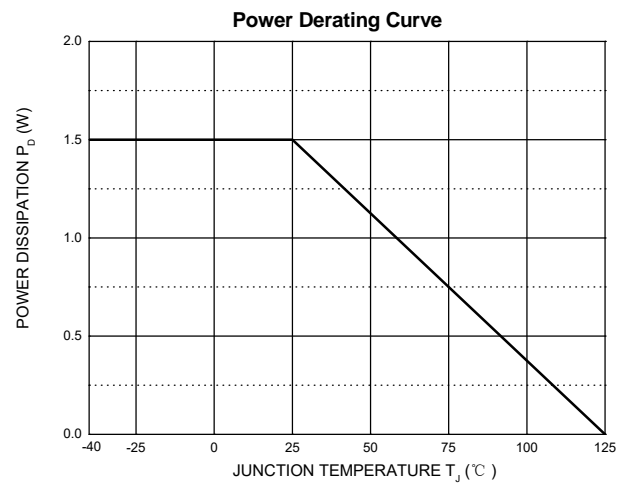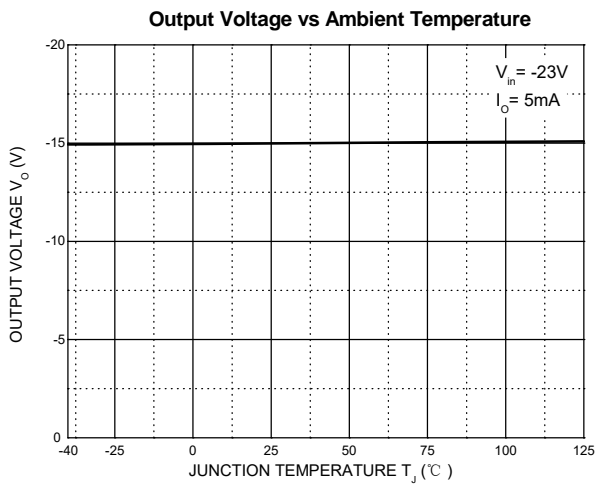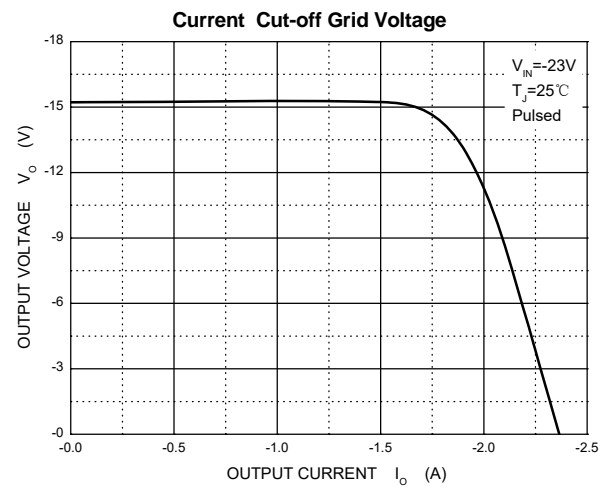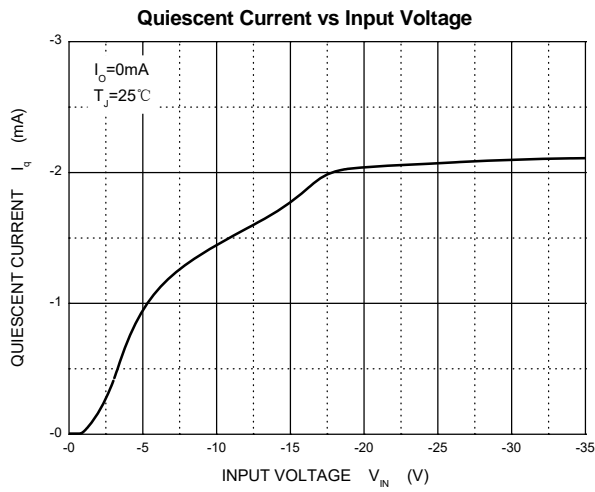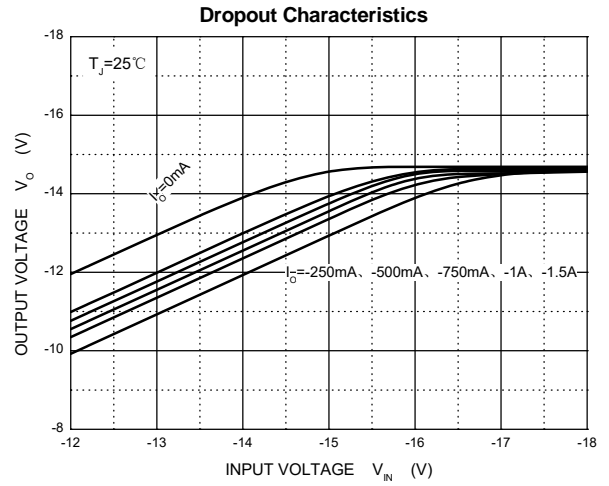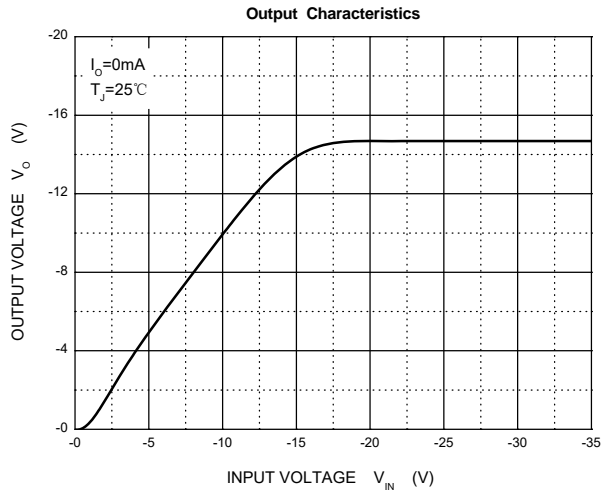

TO-220F Package Outline Dimensions

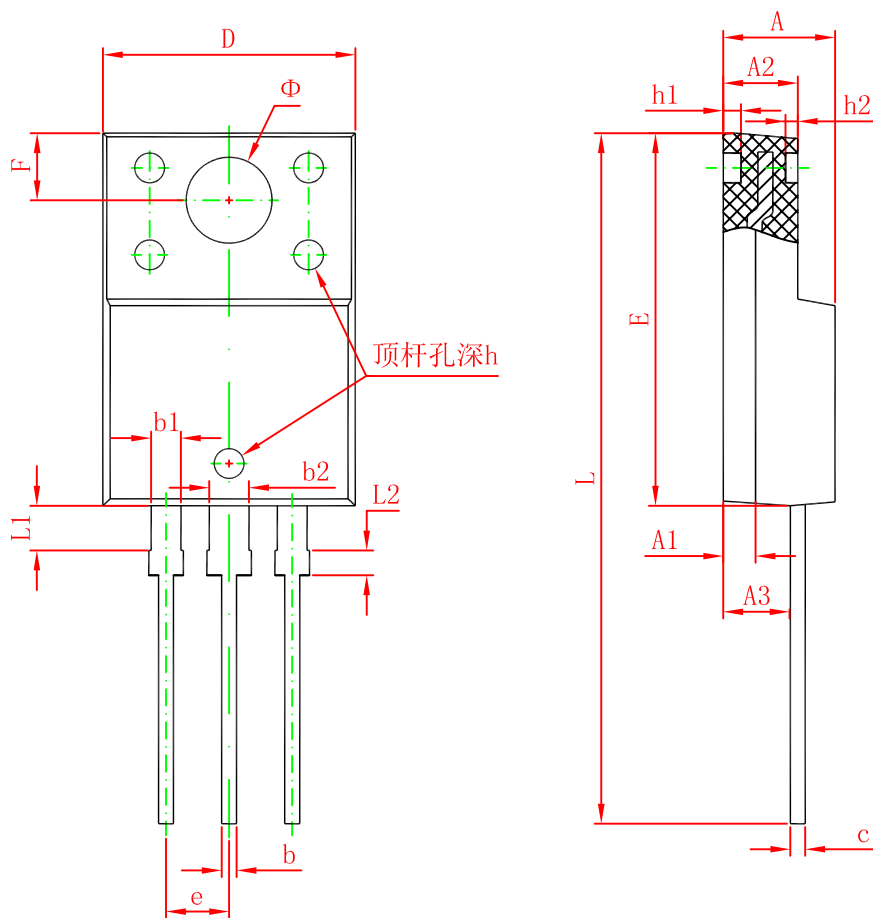

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.300	4.700	0.169	0.185
A1	1.300 REF.		0.051 REF.	
A2	2.800	3.200	0.110	0.126
A3	2.500	2.900	0.098	0.114
b	0.500	0.750	0.020	0.030
b1	1.100	1.350	0.043	0.053
b2	1.500	1.750	0.059	0.069
c	0.500	0.750	0.020	0.030
D	9.960	10.360	0.392	0.408
E	14.800	15.200	0.583	0.598
e	2.540 TYP.		0.100 TYP.	
F	2.700 REF.		0.106 REF.	
Φ	3.500 REF.		0.138 REF.	
h	0.000	0.300	0.000	0.012
h1	0.800 REF.		0.031 REF.	
h2	0.500 REF.		0.020 REF.	
L	28.000	28.400	1.102	1.118
L1	1.700	1.900	0.067	0.075
L2	0.900	1.100	0.035	0.043

DISCLAIMER

IMPORTANT NOTICE, PLEASE READ CAREFULLY

The information in this data sheet is intended to describe the operation and characteristics of our products. JSCJ has the right to make any modification, enhancement, improvement, correction or other changes to any content in this data sheet, including but not limited to specification parameters, circuit design and application information, without prior notice.

Any person who purchases or uses JSCJ products for design shall: 1. Select products suitable for circuit application and design; 2. Design, verify and test the rationality of circuit design; 3. Procedures to ensure that the design complies with relevant laws and regulations and the requirements of such laws and regulations. JSCJ makes no warranty or representation as to the accuracy or completeness of the information contained in this data sheet and assumes no responsibility for the application or use of any of the products described in this data sheet.

Without the written consent of JSCJ, this product shall not be used in occasions requiring high quality or high reliability, including but not limited to the following occasions: medical equipment, automotive electronics, military facilities and aerospace. JSCJ shall not be responsible for casualties or property losses caused by abnormal use or application of this product.

Official Website: www.jscj-elec.com

Copyright © JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD.