

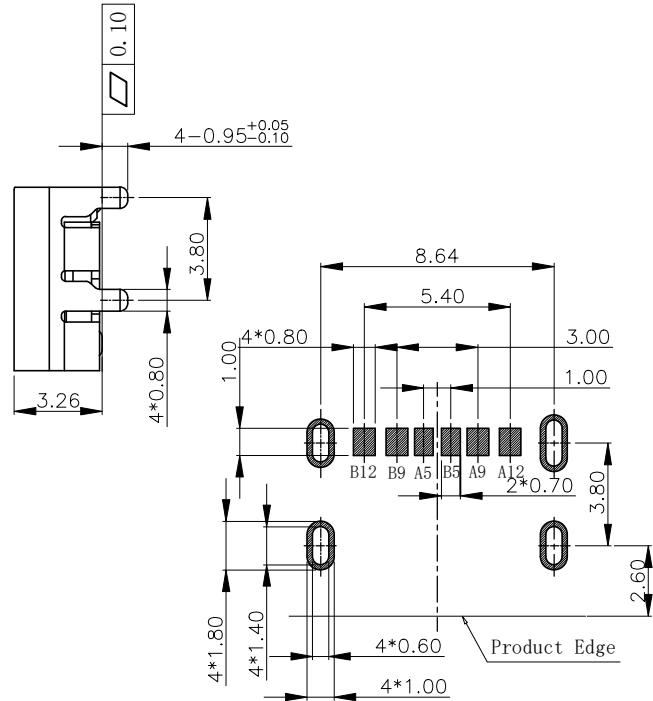

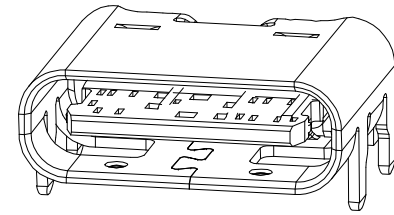




REV.	ECN NO OR DESCRIPTION	REVISED	DATE




A5	CC1	B5	CC2
A9	VBUS	B9	VBUS
A12	GND	B12	GND
PIN	SIGNAL	PIN	SIGNAL

SPECIFICATION:

- Material & Finish: See the list;
- Mechanical:
 - Mating force: 5-20Nf;
 - Unmating force: 6-20Nf;
 - Durability: 3000 Cycles;
- Electrical:
 - Current Rating: 3A Max.;
 - Voltage Rating: 20V Max.;
 - Dielectric Withstanding volage: 100Vac;
 - Contact resistance: 40m Ohms Max.;
 - Insulation Resistance: 100M Ohms Min.;
- Environmental:
 - Operating temperature: -40° C~+85° C;
 - Salt Spray Test: 24H Min. (No oxidation or rust);
 - Wetting Temperature: 265±5° C, 5±0.5s

RECOMMENDED P. C. B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

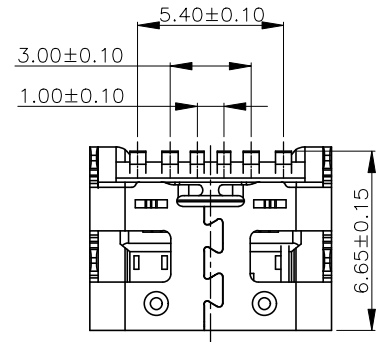

NO.	PART NAME	Q' TY	MATERIAL	FINISH
3	Shell	1	SUS201 T=0.30mm	Ni
2	Housing	1	LCP	UL 94 V-0
1	Contact	1	C5191 T=0.20mm	Au

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: X :±0.30 X.X :±0.20 X.XX :±0.10

ANGLES: X :±2° X.X :±1°

东 莞 市 汉 博 电 子 科 技 有 限 公 司
DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE: TYPE C 6PIN 板上四脚插板 6.8mm

DWN: xiong PART NO. MC-301D

CHKD: lee SCALE:1:1 UNIT: mm

APVD: wang SIZE: A4 SHEET:10F 1 REV: A4

CUSTOMER COPY