


SPECIFICATION

Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min. 500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.25mm
 Operating Temp: -20°C ~ +70°C
 Storage Temp: -30°C ~ +80°C

PAPT NO	TC-1101T-X-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	A:H:4.3 B:H:5.0
Colour	B:Black W:White

P.C.B MOUNTING HOLES

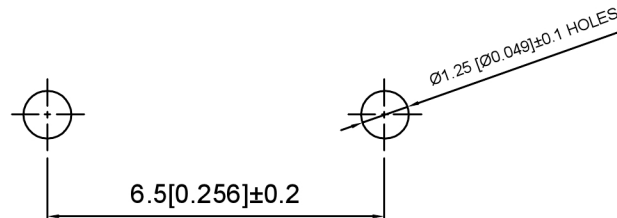

ITEM	PAPT NAME	TER. NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	LCP	—	—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46	—	—

广东星坤科技股份有限公司

ΔX							
ΔX							
ΔX							
MARK							

文件工程章

REVISIONS	DATE	REVISED	APPROVED	DESCRIPTION

UNSPECIFIED TOLERANCES

XKB

XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	TACT SWITCH
CHKD	UNIT: mm/in	PART NO.:
APPD	SIZE: A4	TC-1101T-X-X-X
		DWG NO.:
	WEIGHT	SHEET
		1/1
	REVISIC	A0