

Specifications:

规格:

- 1.Voltage rating:250VAC/DC  
额定电压: 250V AC/DC
  - 2.Current rating:1A AC/DC  
额定电流: 1A AC/DC
  - 3.Withstanding voltage:500V AC/minute  
耐受电压: ≥500V AC/分钟
  - 4.Temperature range:-40℃-+105℃  
温度范围: -40℃-+105℃
  - 5.Insulation resistance:1000MΩMIN  
绝缘电阻: ≥1000MΩ
  - 6.Contact resistance:20mΩMax  
接触电阻: ≥20mΩ
- Material:  
材料:
- 7.Rubber core:PBT UL94V-0  
胶芯: PBT UL94V-0
  - 8.The iron shell:SPCC Nivkel Plating/Tin Plating  
铁壳: SPCC, 镀镍/镀锡
- B、成品不能有弯针，R角不一致等不良。


X07 XX F X X X 5  
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series NO.  
② Row No.Pin No.XX-09;15;25;37  
③ Welding Board Angle :F-Female  
④ T: Tradtional C: Car-pin  
⑤ Planting Catogtry: 1:1U 2:2U 3:3U 4:4U 5:5U 6:6U 7:AuSn  
⑥ Color:B-BLACK W-White BL-Blue  
⑦ 1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4; 5:TYPE-5

| NUMBER OF POSITIONS | DIMENSION |        |        |        |        |
|---------------------|-----------|--------|--------|--------|--------|
|                     | A±0.40    | B±0.30 | C±0.30 | D±0.25 | E±0.25 |
| 9                   | 30.80     | 25.00  | 16.35  | 11.08  | 10.16  |
| 15                  | 39.14     | 33.30  | 24.75  | 19.39  | 17.78  |
| 25                  | 53.05     | 47.04  | 38.35  | 33.24  | 30.38  |
| 37                  | 69.32     | 63.50  | 54.75  | 49.86  | 45.72  |

|            |       |       |
|------------|-------|-------|
| X07XXFXXX5 | XDBLS | XDBLM |
| PART NO    | SCREW | NUT   |

|      |  |             |                          |     |    |
|------|--|-------------|--------------------------|-----|----|
| DSND |  | SCALE: N/A  | MODEL TYPE:<br>D-USB     |     |    |
| DWN  |  | VIEW:       | PART NO.:<br>X07XXFXXX5  |     |    |
| CHKD |  | UNIT: mm/in | DWG NO.:<br>X-X07XXFXXX5 |     |    |
| APPD |  | SIZE: A4    | WEIGHT SHEET REVISION    |     |    |
|      |  |             |                          | 1/1 | A0 |

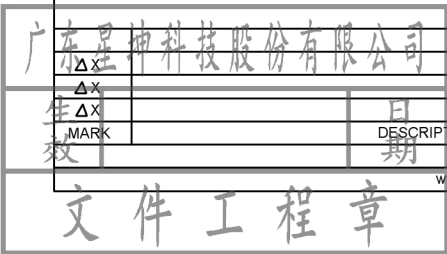

|                        |  |  |  |  |          |      |
|------------------------|--|--|--|--|----------|------|
|                        |  |  |  |  | ANGLAR   | ±5°  |
|                        |  |  |  |  | L≤ 4     | ±0.2 |
|                        |  |  |  |  | 4<L≤ 16  | ±0.3 |
|                        |  |  |  |  | 16<L≤ 63 | ±0.4 |
|                        |  |  |  |  | L> 63    | ±0.5 |
| UNSPECIFIED TOLERANCES |  |  |  |  |          |      |



XKB INDUSTRIAL PRECISION CO.,LIMITED

A diagram showing a car on a road. Above the car, there is a horizontal line representing a road. On this line, there are two vertical lines forming a rectangular frame. Inside this frame, there is a circular sign with a diagonal line through it, indicating a speed limit or a specific road condition.


Technical drawing of a hexagonal part. The drawing shows a hexagon with concentric circles inside. A dimension line with arrows at both ends is positioned to the right of the hexagon, indicating a width or diameter. The dimension is labeled as  $4.75 \pm 0.15$  [0.187].

电镀：50u"镍；80u"镍

# XKLE

|                        |  |                                                                                             |                      |       |          |
|------------------------|--|---------------------------------------------------------------------------------------------|----------------------|-------|----------|
| DSND                   |  | SCALE: N/A                                                                                  | MODEL TYPE: D-USB 螺母 |       |          |
| DWN                    |  | VIEW:  | PART NO.: XDBLM      |       |          |
| CHKD                   |  | UNIT: mm/in                                                                                 | DWG NO.: X-XDBLM     |       |          |
| APPD                   |  | SIZE: A4                                                                                    |                      |       |          |
| PRECISION CO., LIMITED |  |                                                                                             | WEIGHT               | SHEET | REVISION |
|                        |  |                                                                                             |                      | 1/1   | A0       |

#4-40UNC

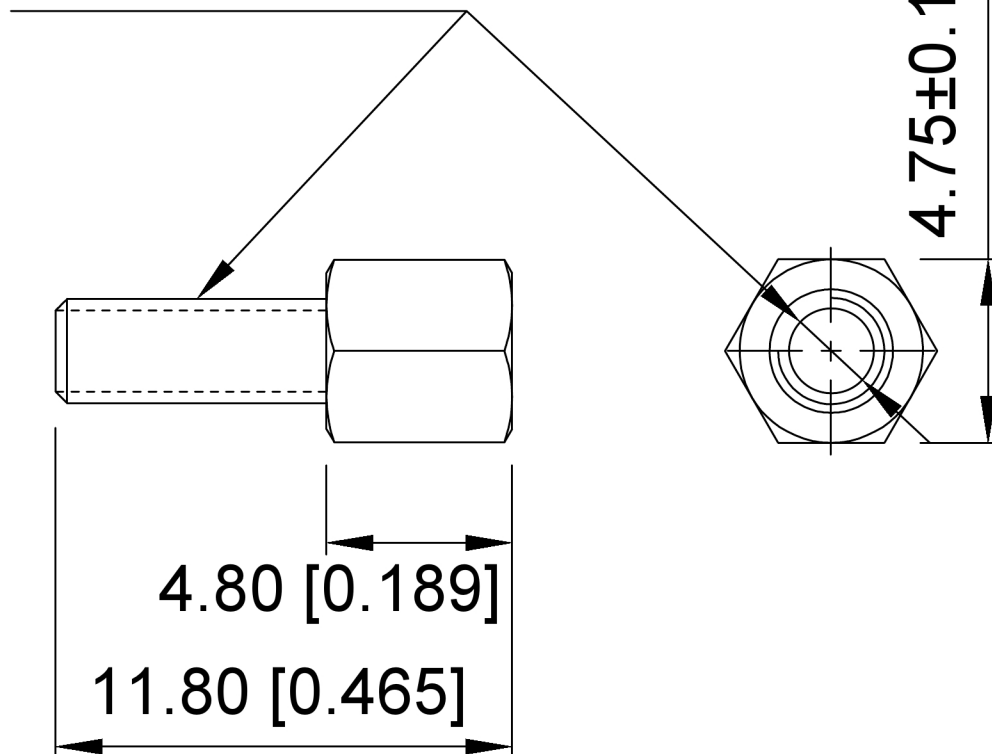

Specifications:

规格:

Material: Brass

材料: 黄铜

Plating: 50u"MIN ; 80u"MIN

电镀: 50u"镍 ; 80u"镍

广东星坤科技股份有限公司

生效日期

文件工程章

| REVISIONS   |      |         |          |  | UNSPECIFIED TOLERANCES |      |
|-------------|------|---------|----------|--|------------------------|------|
| DESCRIPTION | DATE | REVISED | APPROVED |  |                        |      |
|             |      |         |          |  | ANGULAR                | ±5°  |
|             |      |         |          |  | L ≤ 4                  | ±0.2 |
|             |      |         |          |  | 4 < L ≤ 16             | ±0.3 |
|             |      |         |          |  | 16 < L ≤ 63            | ±0.4 |
|             |      |         |          |  | L > 63                 | ±0.5 |

|                                       |      |  |             |                      |           |             |
|---------------------------------------|------|--|-------------|----------------------|-----------|-------------|
| XKB                                   | DSND |  | SCALE: N/A  | MODEL TYPE: D-USB 螺丝 |           |             |
|                                       | DWN  |  | VIEW:       | PART NO.: XDBLS      |           |             |
|                                       | CHKD |  | UNIT: mm/in | DWG NO.: X-XDBLS     |           |             |
|                                       | APPD |  | SIZE: A4    |                      |           |             |
| XKB INDUSTRIAL PRECISION CO., LIMITED |      |  |             | WEIGHT               | SHEET 1/1 | REVISION A0 |