

Specifications:

规格:

- 1.Voltage rating:250VAC/DC
额定电压: 250V AC/DC
 - 2.Current rating:1A AC/DC
额定电流: 1A AC/DC
 - 3.Withstanding voltage:500V AC/minute
耐受电压: ≥500V AC/分钟
 - 4.Temperature range:-40℃~+105℃
温度范围: -40℃~+105℃
 - 5.Insulation resistance:1000MΩMIN
绝缘电阻: ≥1000MΩ
 - 6.Contact resistance:20mΩMax
接触电阻: ≥20mΩ
- Material:
材料:
- 7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0
 - 8.The iron shell:SPCC Nivkel Plating/Tin Plating
铁壳: SPCC,镀镍/镀锡
- B、成品不能有弯针, R角不一致等不良。






X08 XX F X X X 1
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series NO.
② Row No.Pin No.XX-09;15;25;37
③ Welding Board Angle :F-Female
④ T: Tradutional C: Car-pin
⑤ Planting Catogtry: 1:1U 2:2U 3:3U 4:4U 5:5U 6:6U 7:AuSn
⑥ Color:B-BLACK W-White BL-Blue
⑦ 1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4; 5:TYPE-5

NUMBER OF POSITIONS	DIMENSION				
	A±0.40	B±0.30	C±0.30	D±0.25	E±0.25
9	30.80	25.00	16.35	11.08	10.16
15	39.14	33.30	24.75	19.39	17.78
25	53.05	47.04	38.35	33.24	30.38
37	69.32	63.50	54.75	49.86	45.72

X08XXFXXX1	XDBLS	XDBLM
PART NO	SCREW	NUT

DSND		SCALE: N/A	MODEL TYPE: D-USB
DWN		VIEW:	PART NO.: X08XXFXXX1
CHKD		UNIT: mm/in	DWG NO.: X-X08XXFXXX1
APPD		SIZE: A4	
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT
			SHEET
			REVISION
			1/1
			A0

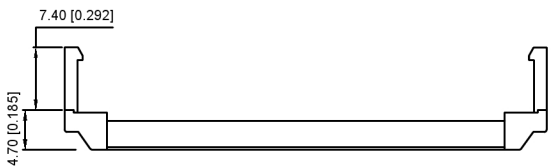

广东星坤科技股份有限公司

生
效
MARK

DESCRIPTION

DATE

REVISED

APPROVED

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5
UNSPECIFIED TOLERANCES	

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED

文件工程章

A diagram showing a car positioned in the center of a lane. The lane is represented by two vertical lines. Above the car, the lane narrows between two vertical lines, with arrows pointing towards the narrow section, indicating a bottleneck or a specific traffic condition.

Technical drawing of a hexagonal part. The drawing shows a hexagon with concentric circles inside. A dimension line with arrows at both ends is positioned to the right of the hexagon, indicating a measurement. The dimension value is 4.75 ± 0.15 [0.187].

电镀：50u"镍；80u"镍

XKLB

DSND		SCALE: N/A	MODEL TYPE: D-USB 螺母		
DWN		VIEW: 	PART NO.: XDBLM		
CHKD		UNIT: mm/in	DWG NO.: X-XDBLM		
APPD		SIZE: A4			
PRECISION CO., LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0

Technical drawing of a bolt and nut assembly. The bolt is labeled #4-40UNC. The drawing shows the bolt and nut from two perspectives: a side view and a top view. The side view shows the bolt with a length of 11.80 [0.465] and a diameter of 4.80 [0.189]. The top view shows the hexagonal nut with a height of 4.75 ± 0.15 [0.187].

电镀: 50u"镍; 80u"镍

广东星坤科技股份有限公司							DSND		SCALE: N/A	MODEL TYPE: D-USB 螺丝		
ΔX					ANGLAR	$\pm 5^\circ$		DWN		VIEW:	PART NO.: XDBLS	
ΔY					$L \leq 4$	± 0.2		CHKD		UNIT: mm/in	DWG NO.: X-XDBLS	
ΔZ					$4 < L \leq 16$	± 0.3		APPD		SIZE: A4		
MARK					$16 < L \leq 63$	± 0.4						
		日期										
REVISIONS						UNSPECIFIED TOLERANCES			XKB INDUSTRIAL PRECISION CO., LIMITED			
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn									WEIGHT	SHEET 1/1	REVISION A0	
文件工程章												