

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:500V AC/minute

耐受电压: 500V AC/分钟

Temperature range:-40℃-+105℃

温度范围: -40℃-+105℃

Insulation resistance:≥100MΩ

绝缘电阻: ≥100MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

X1270 H 2 -2xXX -PT V01

① ②③ ④ ⑤ ⑥

1.Series No


2.Category:H-HSG

3.2:With hook

4.Row No-Pin No:2xXX-2x03P~2x40P

5.Material:PT:PBT UL94V-0

6.Plating Category: V01-All Gold Flash

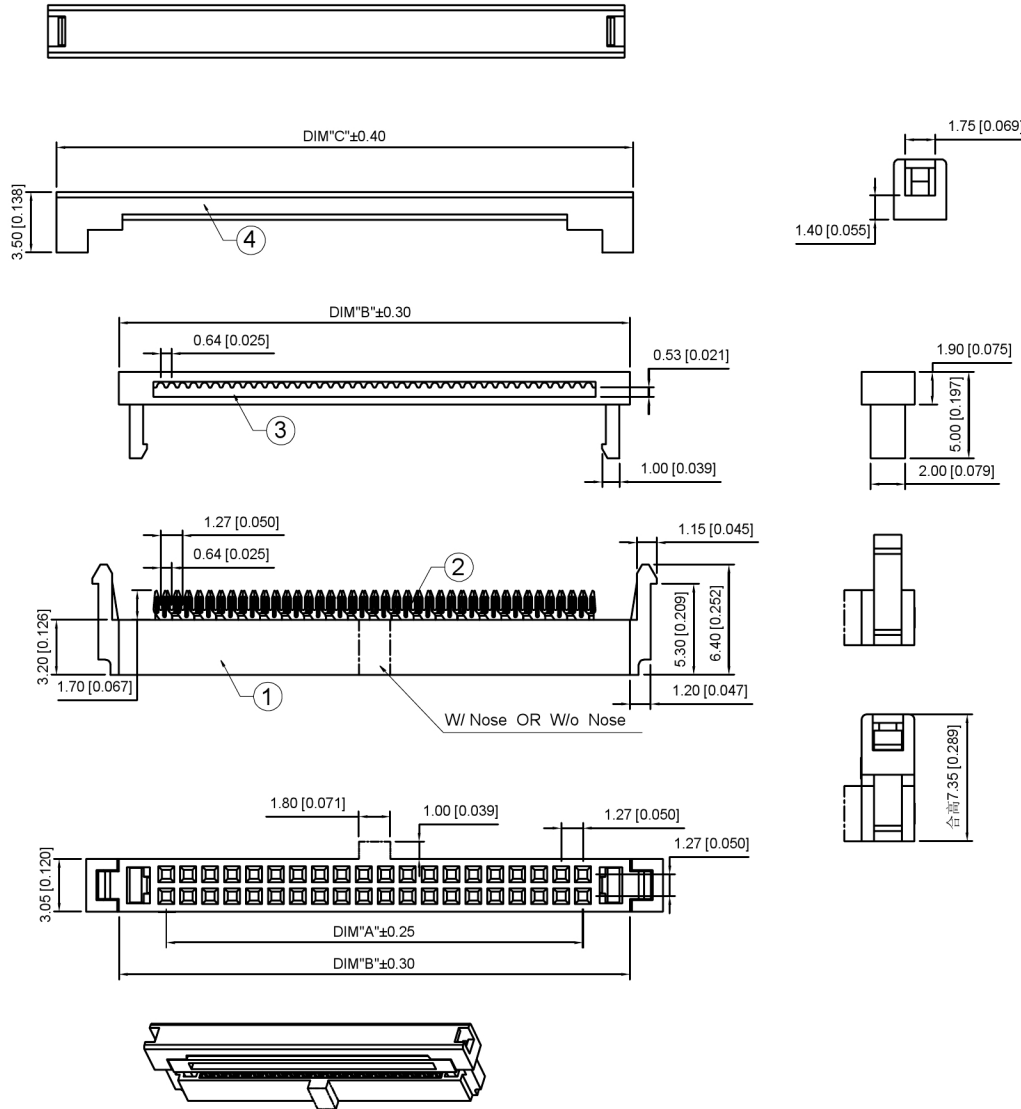

XKB Connectivity

NUMBER OF POSITIONS	DIMENSION		
	A	B	C
06	2.54	8.00	11.80
08	3.81	9.27	13.07
10	5.08	10.54	14.34
12	6.35	11.81	15.61
14	7.62	13.08	16.88
16	8.89	14.35	18.15
20	11.43	16.89	20.69
24	13.97	19.43	23.23
26	15.24	20.70	24.50
30	17.78	23.24	27.04
32	19.05	24.51	28.31
34	20.32	25.78	29.58

36	21.59	27.05	30.85
40	24.13	29.59	33.39
44	26.67	32.13	35.93
50	30.48	35.94	39.74
60	36.83	42.29	46.09
64	39.37	44.83	48.63
66	40.64	46.10	49.90
68	41.91	47.37	51.17
70	43.18	48.64	52.44
74	45.72	51.18	54.98
76	46.99	52.45	56.25
80	49.53	54.99	58.79

X1270H2-2xXX-PTV01	PBT UL 94V-0	Phosphor Bronze	Gold Flash	X1270W
PART NO	Material	Material(Pin And Solder Tabs)	Finish(Pin And Solder Tabs)	Suitable XKB Terminal

广东星坤科技股份有限公司			
ΔX	生	日期	
ΔX	效	日期	
ΔX	效	日期	
MARK	文件工程章	DESIGN	REVISIONS
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn			

					ANGULAR	±5°
					L ≤ 4	±0.2
					4 < L ≤ 16	±0.3
					16 < L ≤ 63	±0.4
					L > 63	±0.5
					UNSPECIFIED TOLERANCES	

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: 1.27mm BTB Style Connectors		
DWN		VIEW: 	PART NO.:		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4	X1270H2-2xXX-PTV01		
PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0