
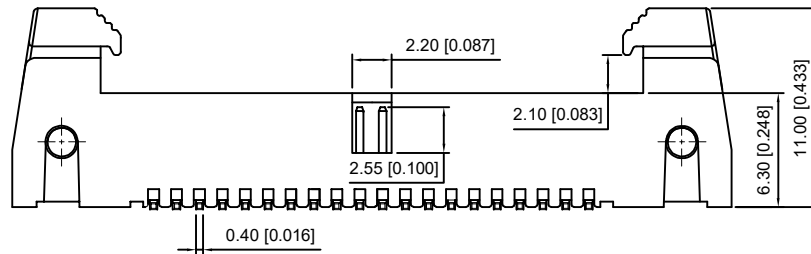
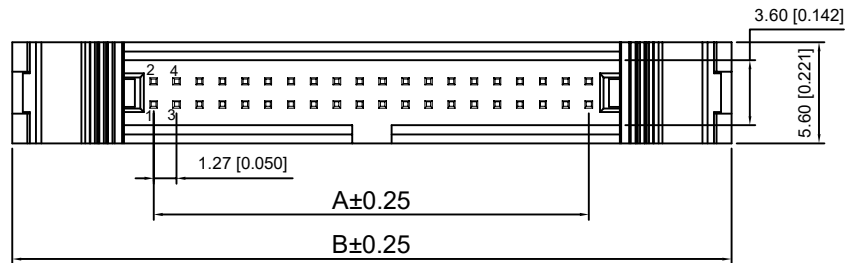
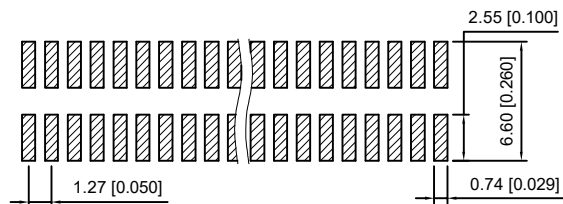


Specifications:**规格:****Voltage rating:**250V AC/DC**额定电压:** 250V AC/DC**Current rating:**1A AC/DC**额定电流:** 1A AC/DC**Withstanding voltage:**500V AC/minute**耐受电压:** 500V AC/分钟**Temperature range:**-40℃-+105℃**温度范围:** -40℃-+105℃**Insulation resistance:**≥1000MΩ**绝缘电阻:** ≥1000MΩ**Contact resistance:**≤20mΩ**接触电阻:** ≤20mΩ**X1270 W V S -2xXX C -6T V01****① ② ③ ④ ⑤ ⑥ ⑦ ⑧****1.Series No****2.Category:**W-WAFER**3.Welding Board Angle:**V-Stright Angle 180°**4.Welding Way:**S-SMT**5.Row No-Pin No:**2xXX-2x03P~2x32P**6.C:**With Horns**7.Material:**6T:Nylon-6T UL94V-0**8.Plating Category:** V01-All Gold Flash**P.C.B LAYOUT**

XKB Connectivity

NUMBER OF POSITIONS	DIMENSION	
	A	B
06	2.54	18.31
08	3.81	19.58
10	5.08	20.85
12	6.35	22.12
14	7.62	23.39
16	8.89	24.66
18	10.16	25.93
20	11.42	27.20
24	13.97	29.74

26	15.24	31.01
30	17.78	33.55
34	20.32	36.09
40	24.13	39.90
50	30.48	46.25
60	36.83	52.60
64	39.37	55.14

X1270WVS-2xXXC-6TV01	Nylon-6T UL 94V-0	Brass	Gold Flash	X1270H
PART NO	Material	Material(Pin And Solder Tabs)	Finish(Pin And Solder Tabs)	Suitable XKB Terminal

					ANGLAR	±5°
ΔX					L≤ 4	±0.2
ΔX					4<L≤ 16	±0.3
ΔX					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKB**XKB INDUSTRIAL PRECISION CO.,LIMITED**

DSND		SCALE: N/A	MODEL TYPE: 1.27mm BTB Style Connectors		
DWN		VIEW: 	PART NO.:		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4	X1270WVS-2xXXC-6TV01		
L PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0