


SCALE: 1:1

**MATERIAL & FINISHES**  
 INSULATOR - PBT GLASS FIBER UL94V-0  
 CONTACT- BRASS  
 SHELL - STEEL  
 PLATING - CONTACT GOLD FLASH PLATED

**ELECTRICAL CHARACTERISTICS**  
 RATING CURRENT : 3A  
 CONTACT RESISTANCE : <15mΩ  
 INSULATION RESISTANCE : <3000MΩ AC 500V  
 DIELECTRIC VOLTAGE : 1000V /MIN  
 OPERATING TEMPERATURE : -50° C TO+105° C

Poles	Part No.	Dim A	Dim B	Dim C	Dim D	Dim E
9	DMR-9P	16.33	24.99	30.81	11.08	6.955
15	DMR-15P	24.66	33.32	39.14	19.39	6.965
25	DMR-25P	38.38	47.04	53.04	33.24	6.90
37	DMR-37P	54.84	63.50	69.32	49.86	6.82

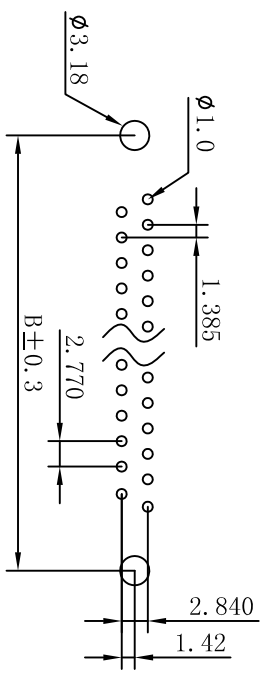

P.C.B LAYOUT

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	<b>Ckmtw</b> 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD	TITLE:	DMR-XP 母头 柳合锁螺丝				
CHECKED:	DATE:			CLIENT P/N	/			
DRAWN:	DATE:		UNIT	mm	SCALE	free	REV.	A
L.Y.F	2015-04-25		FILE NO.	Ckmtw-DMR-0005				