



RoHS

版本 REV	变更内容 CHANGE CONTENT	依据 REFERENCE	变更日期 DATE
A0			

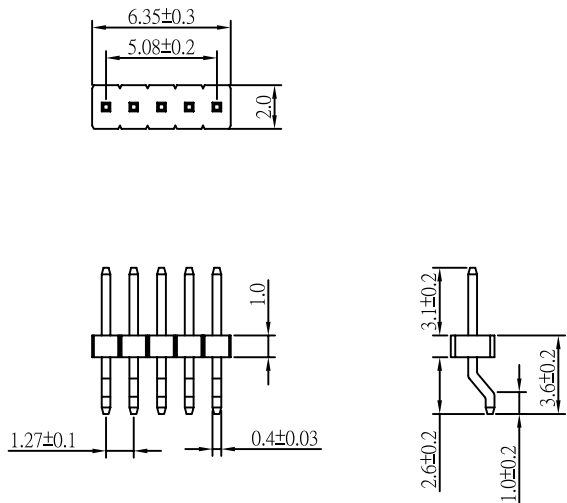

P.C.B LAYOUT

技术要求:

Technical requirement

一. 电气性能:

electrical performance

1-1. 额定电流: 1A AC DC.

rated current: 1A AC DC.

1-2. 接触电阻: $\leq 20m\Omega$

Contact resistance: $\leq 20m\Omega$

1-3. 绝缘电阻: $\geq 1000M\Omega$

Insulation resistance: $\geq 1000M\Omega$

1-4. 耐压: 550V AC/Minute

withstand voltage: 550V AC/Minute

二. 物理特性:

Physical characteristics

2-1. 环境温度: $-25^{\circ}C \sim 105^{\circ}C$

environmental temperature: $-25^{\circ}C \sim 105^{\circ}C$

2-2. 焊接温度: $+260^{\circ}C$, 10s max

welding temperature: $+260^{\circ}C$, 10s max

三. 材质:

Material

3-1. 塑胶: PA6T(Black) UL94V-0

plastic: PA6T(Black) UL94V-0

3-2. 插针: 黄铜/镀金

pin: Brass/Gold plated

PIN	A	B
1x2A	2.54	1.27
1x3A	3.81	2.54
1x4A	5.08	3.81
1x5A	6.35	5.08
1x6A	7.62	6.35
1x7A	8.89	7.62
1x8A	10.16	8.89
1x9A	11.43	10.16
1x10A	12.70	11.43
1x11A	13.97	12.70
1x12A	15.24	13.97
1x13A	16.51	15.24
1x14A	17.78	16.51
1x15A	19.05	17.78
1x16A	20.32	19.05
1x17A	21.59	20.32
1x18A	22.86	21.59
1x19A	24.13	22.86
1x20A	25.40	24.13
1x21A	26.67	25.40
1x22A	27.94	26.67
1x23A	29.21	27.94
1x24A	30.48	29.21
1x25A	31.75	30.48
1x26A	33.02	31.75
1x27A	34.29	33.02
1x28A	35.56	34.29
1x29A	36.83	35.56
1x30A	38.10	36.83
1x31A	39.37	38.10
1x32A	40.64	39.37
1x33A	41.91	40.64
1x34A	43.18	41.91
1x35A	44.45	43.18
1x36A	45.72	44.45
1x37A	46.99	45.72
1x38A	48.26	46.99
1x39A	49.53	48.26
1x40A	50.80	49.53
1x50A	63.50	62.23

3	包装		/	PCS
2	塑胶	PH1.27*1.0 W2.0mm 1*50P PA6T料	1	PCS
1	方针	0.4x7.0mm 黄铜镀金G/F	/	PCS
ITEM	PART NAME	DESCRIPTION	QUA'Y	UNIT

	单位 UNIT	mm	泰华电子有限公司 Tai Hua-Tech Industrial Co.,Ltd.	
	比例 SCALE			
x ± 0.5	x*±	核准:	版本: A0	客户名称 Client name
.x ± 0.30	.x*±	APPROVED BY	页次: 1/1	产品名称 Production name
.xx ± 0.20	.xx*±	审核:	日期:	PH1.27x1.0mm 排针 G/F 卧贴 1xN P
.xxx ± 0.005	.xxx*±	CHECKED BY	2018.7.28	产品料号 Product No
		制图: 吕灿东		客户料号 Client NO
		DRAWN BY		