

RoHS

版本 REV	变更事项 CHANGE CONTENT	版数 THERINDEX	变更日期 DATE
A0			

技术要求:

Technical requirement

一. 电气性能:

electrical performance

1-1. 额定电流: 1A AC DC

rated current: 1A AC DC

1-2. 接触电阻: $\leq 20m\Omega$

Contact resistance: $\leq 20m\Omega$

1-3. 绝缘电阻: $\geq 1000M\Omega$

Insulation resistance: $\geq 1000M\Omega$

1-4. 耐压: 550V AC/Minute

withstand voltage: 550V AC/Minute

二. 物理特性:

Physical characteristics

2-1. 环境温度: $-25^{\circ}C \sim 105^{\circ}C$

environmental temperature: $-25^{\circ}C \sim 105^{\circ}C$

2-2. 焊接温度: $+260^{\circ}C$, 10s max

welding temperature: $+260^{\circ}C$, 10s max

三. 材质:





Material

3-1. 塑胶: PA6T(Black) UL94V-0

plastic: PA6T(Black) UL94V-0

3-2. 插针: 磷铜/镀金

pin: Phosphor/Gold plated

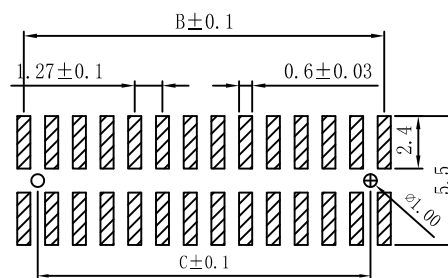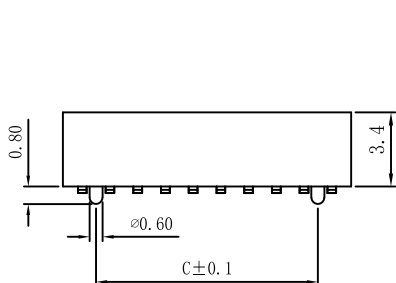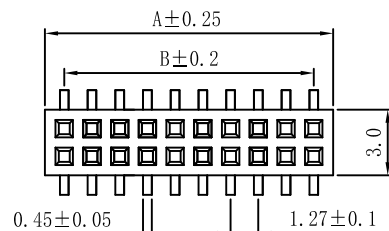

PC.B LAYOUT

FIN	A	B	C
2x24	2.94	1.27	/
2x3A	4.27	2.54	1.27
2x4	3.48	3.81	2.54
2x5A	4.75	5.08	3.81
2x6	6.02	6.35	5.08
2x7A	7.29	7.62	6.35
2x8A	8.56	8.89	7.62
2x9	9.83	10.16	8.89
2x10A	11.10	11.43	10.16
2x11A	12.37	12.70	11.43
2x12A	13.64	13.97	12.70
2x13A	14.91	15.24	13.97
2x14A	16.18	16.51	15.24
2x15A	17.45	17.78	16.51
2x16A	18.72	19.05	17.78
2x17A	19.99	20.32	19.05
2x18A	21.26	21.59	20.32
2x19A	22.53	22.86	21.59
2x20	23.80	24.13	22.86
2x21A	25.07	25.40	24.13
2x22A	26.34	26.67	25.40
2x23A	27.61	27.94	26.67
2x24A	28.88	29.21	27.94
2x25A	30.15	30.48	29.21
2x26A	31.42	31.75	30.48
2x27A	32.69	33.02	31.75
2x28A	33.96	34.29	33.02
2x29A	35.23	35.56	34.29
2x30	36.50	36.83	35.56
2x31A	37.77	38.10	36.83
2x32A	39.04	39.37	38.10
2x33A	40.31	40.64	39.37
2x34A	41.58	41.91	40.64
2x35A	42.85	43.18	41.91
2x36A	44.12	44.45	43.18
2x37A	45.39	45.72	44.45
2x38A	46.66	46.99	45.72
2x39A	47.93	48.26	46.99
2x40	49.20	49.53	48.26
2x41A	50.47	50.80	49.53
2x42A	51.74	52.07	50.80
2x43A	53.01	53.34	52.07
2x44A	54.28	54.61	53.34
2x45A	55.55	55.88	54.61
2x46A	56.82	57.15	55.88
2x47A	58.09	58.42	57.15
2x48A	59.36	59.69	58.42
2x49A	60.63	60.96	59.69
2x50	61.90	62.23	60.96

3	包装	<input type="checkbox"/> 袋装 <input type="checkbox"/> 管装 <input checked="" type="checkbox"/> 卷装 <input type="checkbox"/> 盒装	1	PCS
2	塑胶	PH1.27*3.4 2*nP 带柱 PA6T料	1	PCS
1	端子	W4.7mm 磷铜镀金G/F	/	PCS
ITEM	PART NAME	DESCRIPTION	QUA' Y	UNIT

	单位	mm	深圳市泰华电子有限公司 TaiHua Electronics Co., Ltd	
	比例			
x ± 0.5	x.* ±	核准:	版本: A0	产品名称 Production name
.x ± 0.30	.x * ±	审核:	页次: 1/1	PH1.27x3.4mm 排母 G/F SMT 带柱
.xx ± 0.20	.xx * ±	制图: 封文辉	日期:	产品料号 Product No
.xxx ± 0.005	.xxx * ±	DRAWN BY		客户料号 Client No