

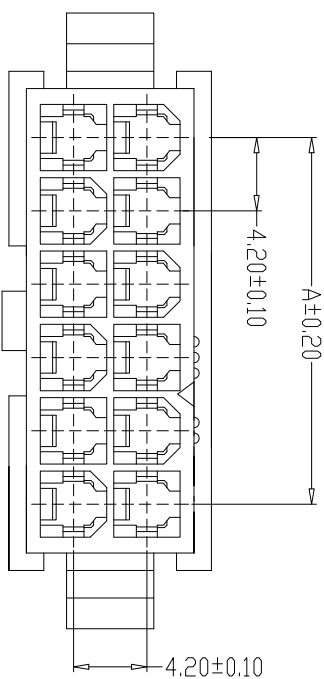


- SPECIFICATIONS**
- 1、Current Rating: 9A AC, DC
 - 2、Voltage Rating: 600V AC, DC
 - 3、Temperature Range: -25°C~+85°C
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltage: 1500V AC/minute
 - 7、Material: Nylon66, UL94V-0

编号	尺寸 (mm)	
	A	B
C4255-2X01R	---	7.60
C4255-2X02R	4.20	11.80
C4255-2X03R	8.40	16.00
C4255-2X04R	12.60	20.20
C4255-2X05R	16.80	24.40
C4255-2X06R	21.00	28.60
C4255-2X07R	25.20	32.80
C4255-2X08R	29.40	37.00
C4255-2X09R	33.60	41.20
C4255-2X10R	37.80	45.40
C4255-2X11R	42.00	49.60
C4255-2X12R	46.20	53.80

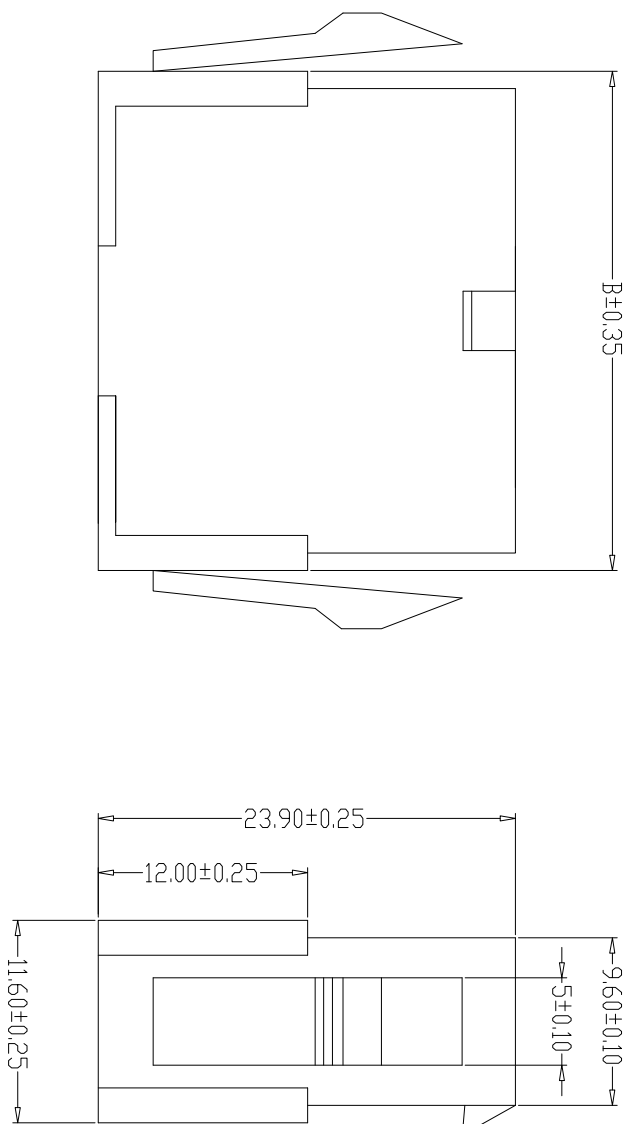

单位
UNIT
mm

比例
SCALE

批准:
APPROVED BY

审核:
CHECKED BY

制图:
DRAWN BY

版本:
A0

页次:
1/1

日期:

泰华电子有限公司
TaiHua Electronics Co., Ltd

5559双排孔座

产品名称
Production name

产品料号
Product No
TH-C4255-2XNR

客户料号
Client No