


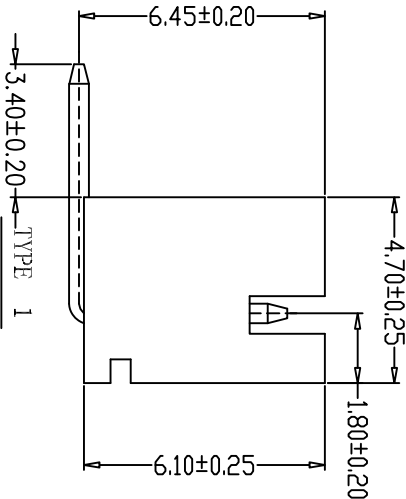
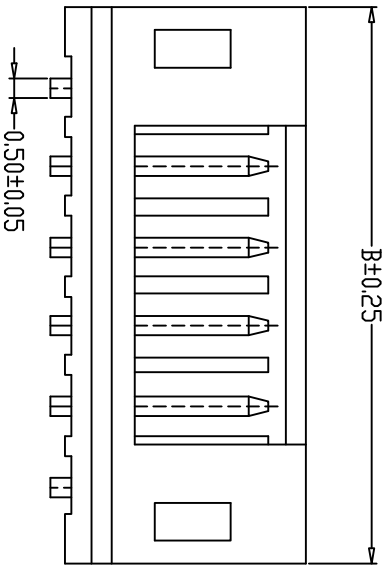
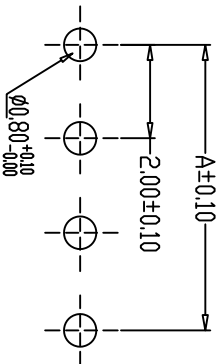


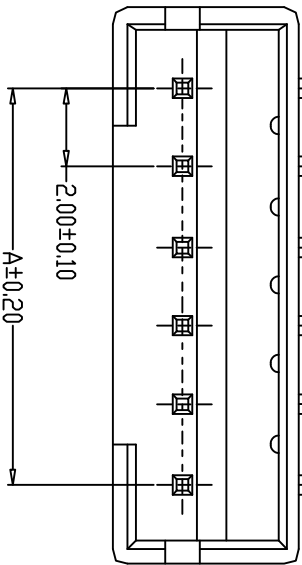

- SPECIFICATIONS**
- 1、Current Ratings: 2A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperatuer Range: -25℃~+85℃
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltang: 800V AC/minute
 - 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

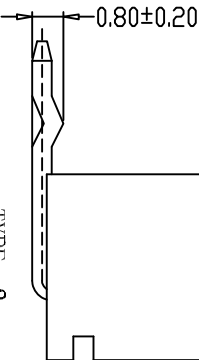

PCB LAYOUT

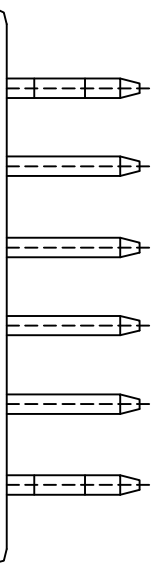

x. ±0.5	x.*±
. x±0.30	. x.*±
. xx±0.20	. xx.*±
. xxx±0.005, xxx.*±	

单位 UNIT	mm	深圳市泰华电子有限公司 <i>TaiHua Electronics Co., Ltd</i>		
比例 SCALE		版本: A0	产品名称 Production name	PH弯针 WAFER DIP TYPE
核准: APPROVED BY		审核: CHECKED BY	页次: 1/1	产品料号 Product No
制图: DRAWN BY	封文辉 2022.9.5	日期:	客户料号 Client No	

编 号	尺寸 (mm)	
	A	B
A2001-02AW	2.00	6.00
A2001-03AW	4.00	8.00
A2001-04AW	6.00	10.00
A2001-05AW	8.00	12.00
A2001-06AW	10.00	14.00
A2001-07AW	12.00	16.00
A2001-08AW	14.00	18.00
A2001-09AW	16.00	20.00
A2001-10AW	18.00	22.00
A2001-11AW	20.00	24.00
A2001-12AW	22.00	26.00
A2001-16AW	30.00	34.00

版本 REV	变更原因 CHANGE REASON	审核 THIRD CHECK	变更日期 DATE
10			