

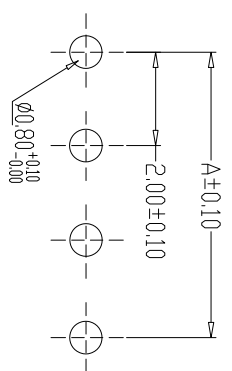
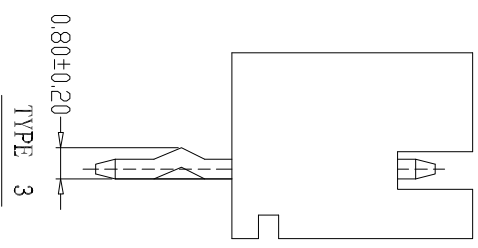
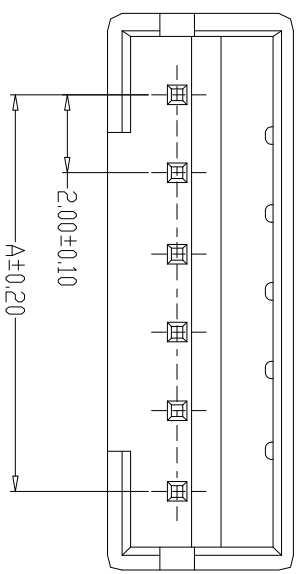


- SPECIFICATIONS**
- 1、Current Rating: 2A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperature Range: -25°C~+85°C
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltage: 800V AC/minute
 - 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编号	尺寸 (mm)	
	A	B
A2001-02A	2.00	6.00
A2001-03A	4.00	8.00
A2001-04A	6.00	10.00
A2001-05A	8.00	12.00
A2001-06A	10.00	14.00
A2001-07A	12.00	16.00
A2001-08A	14.00	18.00
A2001-09A	16.00	20.00
A2001-10A	18.00	22.00
A2001-11A	20.00	24.00
A2001-12A	22.00	26.00
A2001-16A	30.00	34.00

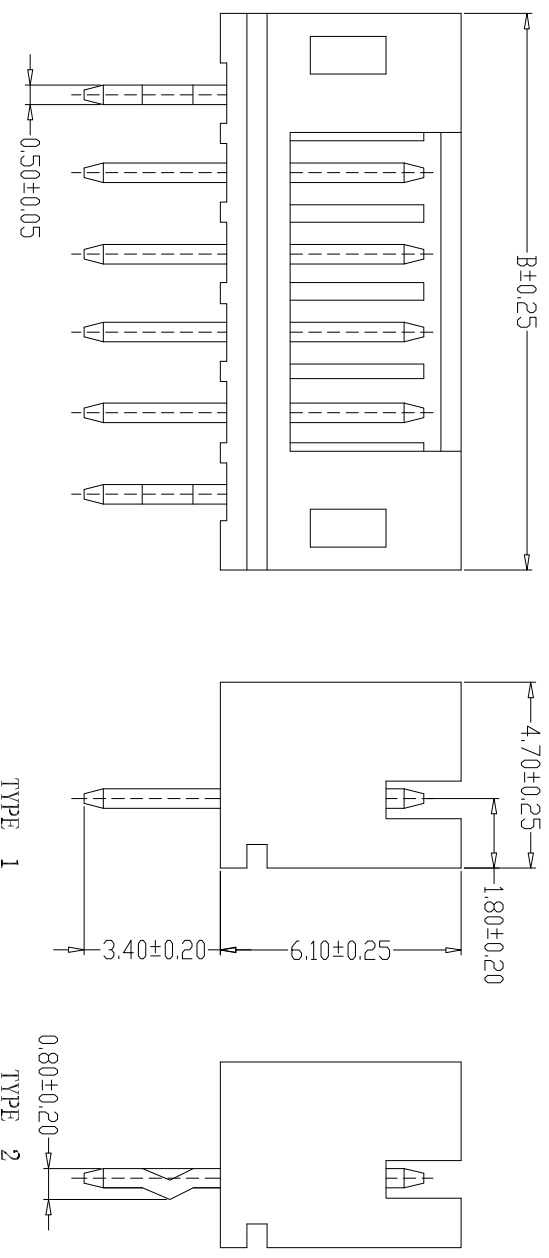

PCB LAYOUT



X. ±0.5	X* ±
. X ±0.30	. X* ±
. XX ±0.20	. XX* ±
. XXX ±0.005	. XXX* ±

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd

单位	mm
比例	
SCALE	
核准:	版本: A0
APPROVED BY	Production name
审核:	PH直针 WAFER DIP TYPE
CHECKED BY	Product No
制图:	TH-A2001-NA
封文辉	客户料号
DRAWN BY	Client No
2022.9.5	
日期:	