
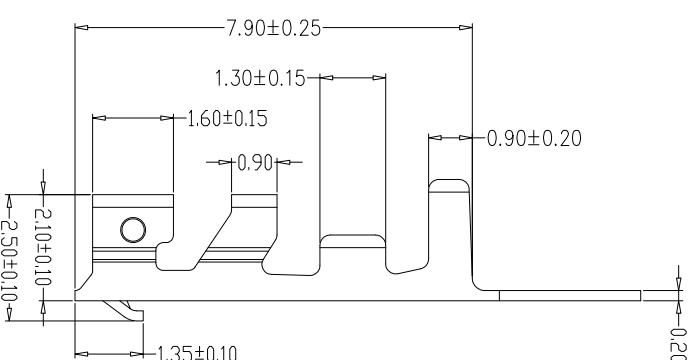
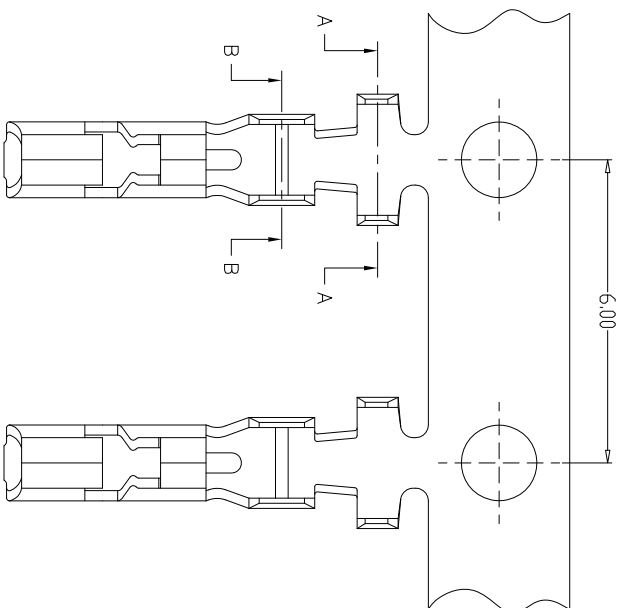


SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material:Phosphoric bronze Tin-plated
- 8、Applicable Wire Sizes:AWG#24~30#



$x \cdot \pm 0.5$	$x \cdot \pm$
-------------------	---------------

$x \pm 0.30$	$x \cdot \pm$
--------------	---------------

$x \pm 0.20$	$x \cdot \pm$
--------------	---------------

$x \pm 0.005$	$x \cdot \pm$
---------------	---------------

单位 UNIT	mm
比例 SCALE	
核准: APPROVED BY	版本: A0
审核: CHECKED BY	页次: 1/1
制图: DRAWN BY	日期:
封文辉	客户料号 Client No

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd

SPH端子

TH-A2015-T1