
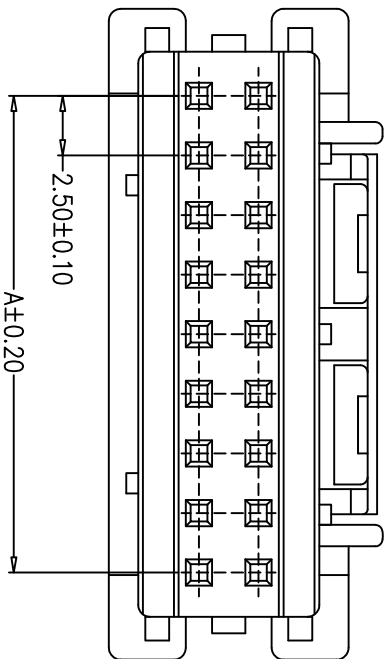
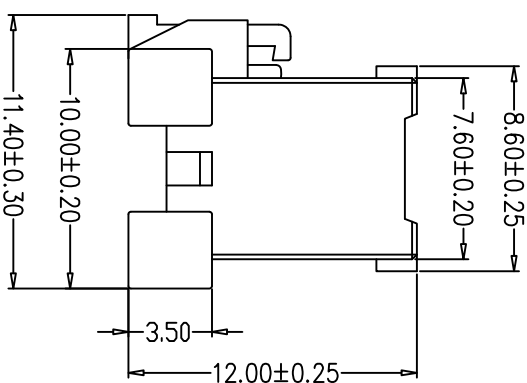


ROHS

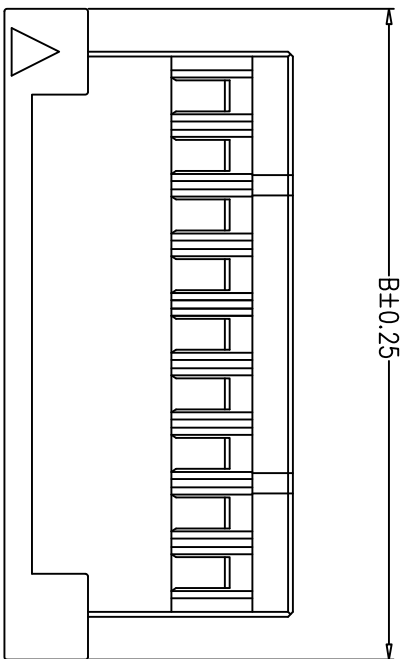

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperature Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltage: 1000V AC/minute
- 7、Material:Housing:Nylon66, UL94V-0

编 号	尺寸 (mm)	
	A	B
A2508-2X04Y	7.50	15.00
A2508-2X05Y	10.00	17.50
A2508-2X06Y	12.50	20.00
A2508-2X07Y	15.00	22.50
A2508-2X08Y	17.50	25.00
A2508-2X09Y	20.00	27.50
A2508-2X10Y	22.50	30.00
A2508-2X11Y	25.00	32.50
A2508-2X12Y	27.50	35.00
A2508-2X13Y	30.00	37.50
A2508-2X14Y	32.50	40.00
A2508-2X20Y	47.50	55.00



X. ±0.5	X* ±
. X ±0.30	. X* ±
. XX ±0.20	. XX* ±
. XXX ±0.005	. XXX* ±

单位 UNIT	mm
比例 SCALE	
批准: APPROVED BY	版本: A0
审核: CHECKED BY	页次: 1/1
制图: DRAWN BY	日期:
	客户料号 Client No

深圳市泰华电子有限公司  
TaiHua Electronics Co., Ltd

XX双排孔座

产品名称  
Production name

产品料号  
Product No

客户料号  
Client No

版本 REV	变更日期 CHANGE DATE	变更理由 REASON
A0		