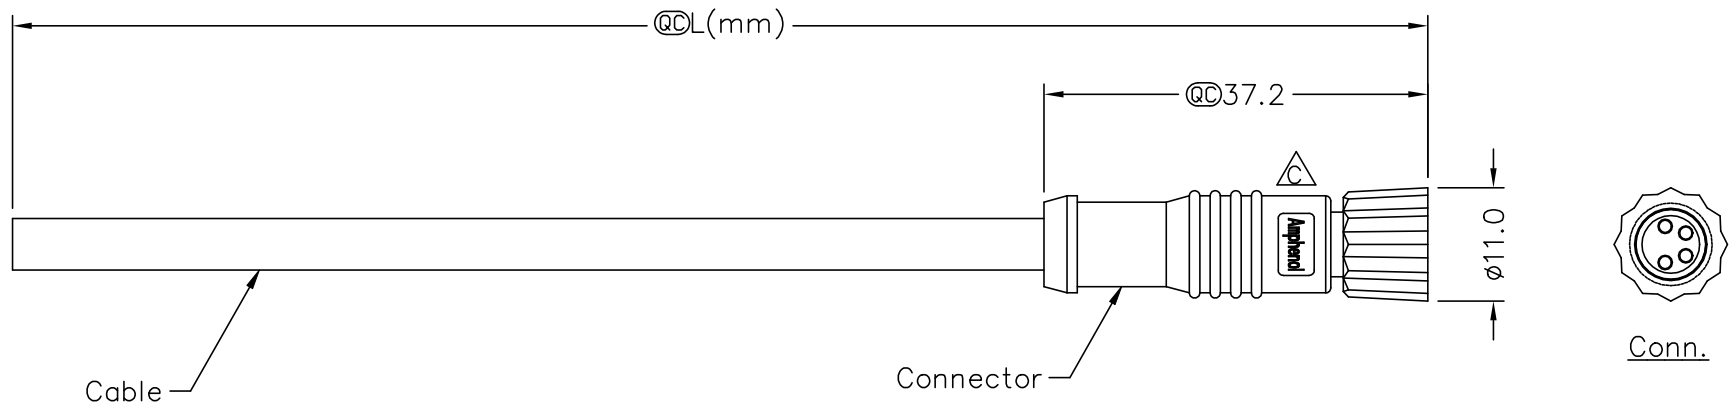


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1620227~231	2016/02/01	Ruru	Change Logo
D	C210636	2021/04/23	Vicky	△X8
E	C221880	2022/12/06	Vicky	△X1



- △ Note:
- * RoHS Compliant
 - * @C Important dimension
 - △ * Waterproof rate: IP67, mated Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Thermoplastic, Black
 - O-Ring: Rubber, Green
 - Outer mold: Thermoplastic, Black
 - * Cable: PU Jacket, Black
 - △ * Cable length tolerance:

1M < L ≤ 3M:	+50/-0 mm
3M < L ≤ 5M:	+100/-0 mm
5M < L ≤ 10M:	±100 mm
10M < L ≤ 20M:	±200 mm
20M < L ≤ 30M:	±300 mm
30M < L ≤ 99M:	±500 mm

UNIT:mm	TITLE O SEN, M8 PLASTIC CABLE W/SR, F, F, MOLDING		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ruru	DATE 2016/02/01
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 2		DWG. NO △ 8P-XXBFFM-SL7BXX	CHECKED BY Rita	DATE 2016/02/01
REV. E	SIZE A4	@C : Inspection Item	CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/02/01	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

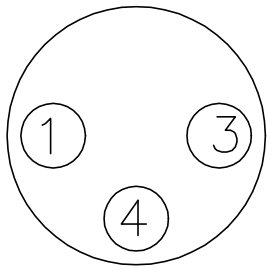

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

4P	4.8	22	8P-04BFFM-SL7BXX
3P	4.5		8P-03BFFM-SL7BXX
△ Contacts	Cable OD	AWG	Item No.


△ 8P-XXBFFM-SL7BXX

XX: No. Of Pin

↑
 XX: 01~99Meters
01: 01Meter
02: 02Meters
 :
 :
99: 99Meters
 Cable Length(L): 01~99Meters

Pin Out	4	Black	黑	4	Black	黑
	3	Blue	藍	3	Blue	藍
	1	Brown	棕	2	White	白
				1	Brown	棕
	Pin #	Wire		Pin #	Wire	
Conn.						
	3P			4P		

△ Pin Assignments Front View

UNIT:mm		TITLE	O SEN, M8 PLASTIC △△	
TOLERANCE	±0.5 mm	CABLE W/SR, F, F, MOLDING		△△
SCALE	Free	SHEET	2	OF 2
REV.	E	SIZE	A4	QC: Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	Ruru	DATE	2016/02/01
DWG. NO	CHECKED BY	Rita	DATE	2016/02/01
CUSTOMER	APPROVED BY	Lisa	DATE	2016/02/01
△ 8P-XXBFFM-SL7BXX		ALTW		