



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/20	Vicky	Initial Released
B	C220472	2022/03/28	Vicky	$\triangle B$ X2

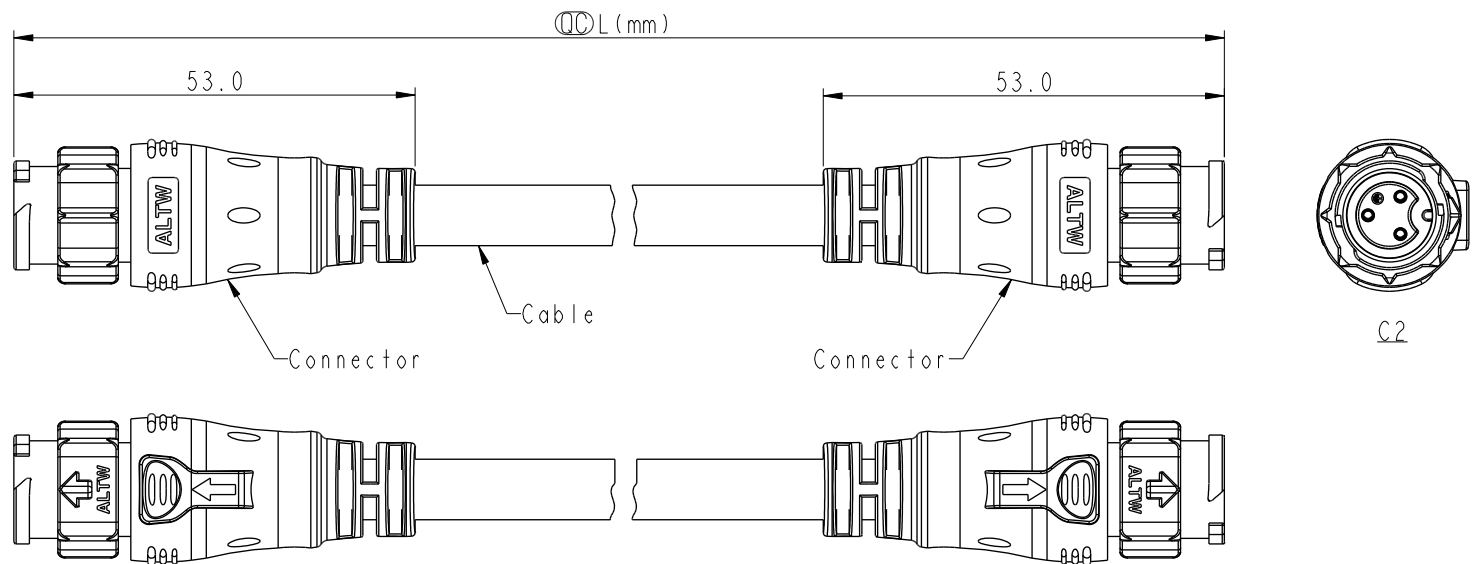

Pin Out	3 White 2 Green 1 Black	白 綠 黑
	Pin #	Wire

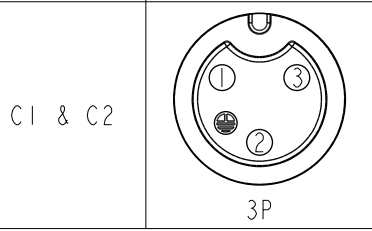

$\triangle B$ AB-BD XX HL-BDHL-QE XXX
 XX: No. Of Pin
 XXX: 0.5~99Meters
 A05: 0.5 Meter
 001: 01 Meter
 002: 02 Meters
 :
 099: 99 Meters

$\triangle B$ Note:
 * RoHS Compliant
 * $\circ L$ Important dimension
 * Waterproof rate: IPX8, mated 1m/24h
 * Connector
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Outer Mold: Thermoplastic, Black
 * Cable: SJTW, 18#*3C, PVC Jacket, Black, OD8.0mm
 * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm

UNIT:mm	$\circ L$ $\circ L$	TITLE	ACC, XLOK, B-5A, DB-ENDED MM		
TOLERANCE	±0.5mm	SCALE	1:2	SIZE	A4
		REV.	B	WC-REV.	A.5
				$\circ L$	Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Vicky	2020-01-20
DWG NO	CHECKED BY	DATE
AB-BDXXHL-BDHL-QEXXX	Rita	2020-01-20
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2020-01-20