





THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

5	6	7	8
REV.	ECN NO.	DATE	SIGN

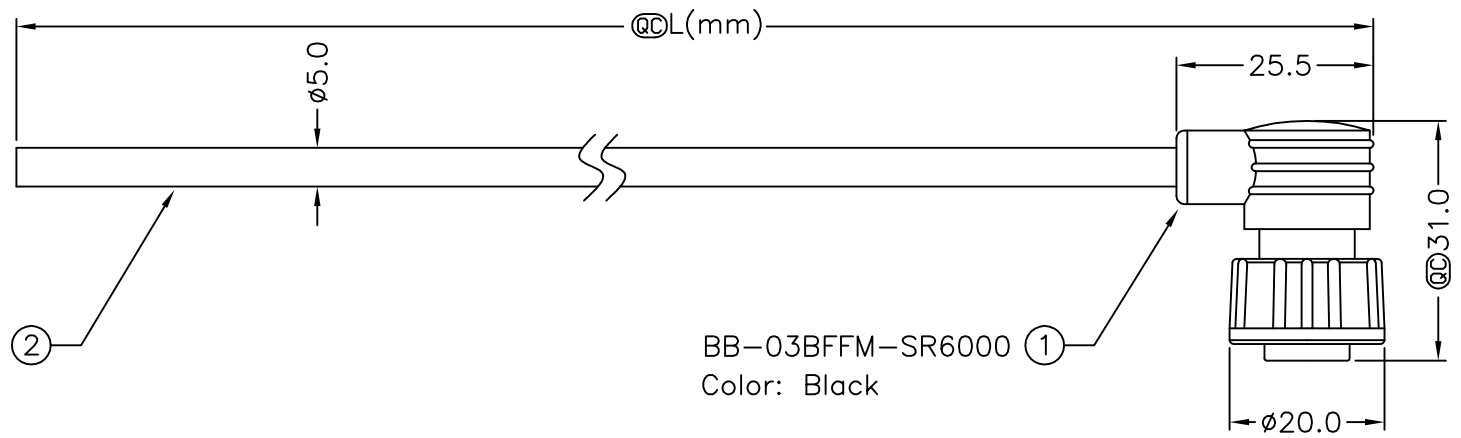


BB-03BFFM-SR6000 ①
Color: Black

BB-03BFFM-SR6AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



- Note:
- * @DL Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 20AWG*3C+Al/My PVC Jacket UV Resistant, OD=5.0mm
 - * Cable Length Tolerance: 1M~10M±5%mm, 11M~99M±500mm.

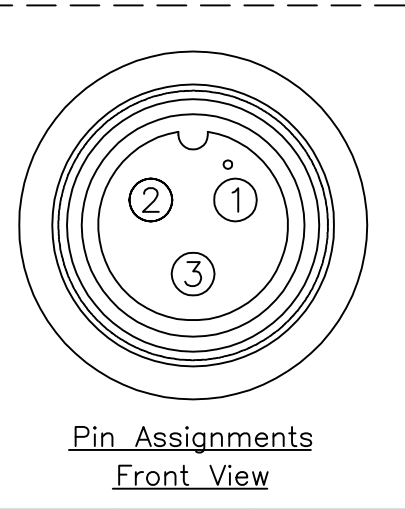

3	Yellow
2	White
1	Black
Conn.	Wire Color

UNIT:mm		TITLE	Standard	ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5 mm	Cable Screw 3Pin F Conn. F Pin		BB-03BFFM-SR6AXX	Allan Frank Valentino	2007/02/06
		SCALE	Free	CUSTOMER	CHECKED BY	DATE
		REV.	A	ALTW	Robert Dabu	2007/02/12
		SIZE	A4		APPROVED BY	DATE
		SHEET	1 OF 1		Win	2007/02/12
		@DL	:Inspection Item			
1	2	3	4	5	6	7
						8

Amphenol LTW
安費諾亮泰企業股份有限公司