
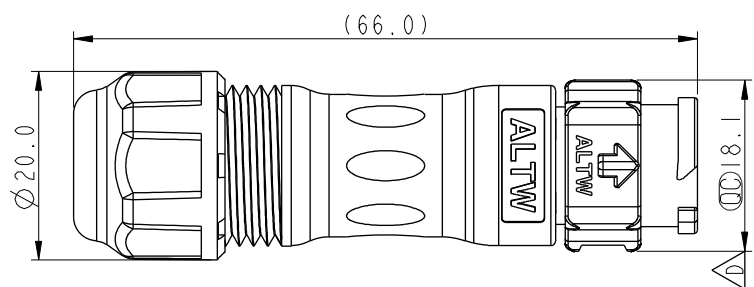


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	CI91677	2019/09/24	Brady Chung	Add New Type
C	CI91760	2019/10/15	Jane	△C X5
D	CI92023	2019/11/20	Vicky	△D X4

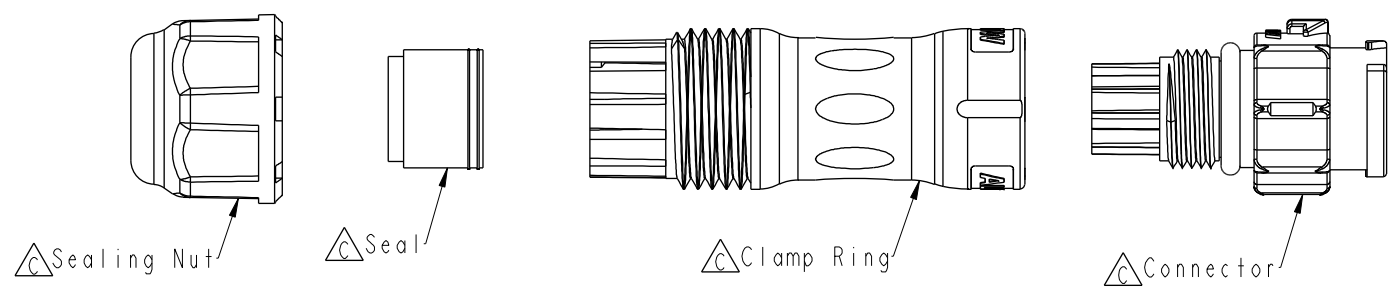

BD-XXBMM-QL8XNO

- 02-2Pin
- 03-3Pin
- 04-4Pin
- 05-5Pin
- 06-6Pin
- 07-7Pin
- 08-8Pin

- S: With Red Color Seal 1, Cable OD 5.0~6.0mm.
- M: With Yellow Color Seal 2, Cable OD 6.0~8.0mm.
- L: With Blue Color Seal 3, Cable OD 8.0~10.0mm.
- A: With Seal 1 & Seal 2 & Seal 3.

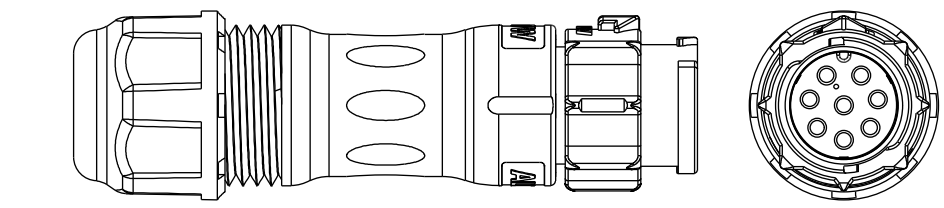

- △D Note:
- * ∅ Important Dimension
 - * Waterproof Rate: IP68, Mated
IP68: 1M Depth Of Water In 24hours
 - * Housing: Thermoplastic, Black
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seals: Rubber

Pin Assignments Front View	2 Pin	3 Pin	4 Pin	5 Pin	6 Pin	7 Pin	8 Pin

UNIT:mm TOLERANCE ±0.5mm	 TITLE: XLOK, B-5A, CABLE W/O SR M, M, FI CRIMP, XLOK SCALE: 1:1 SIZE: A4 SHEET: 1 OF 1 REV: D WC-REV: A.5 ∅: Inspection item	<h1>Amphenol LTW</h1> 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY	DATE
			DWG NO BD-XXBMM-QL8XNO	CHECKED BY Jane Wang	DATE 2019-09-24
			CUSTOMER ALTW	APPROVED BY Neo Tsai	DATE 2019-09-24