

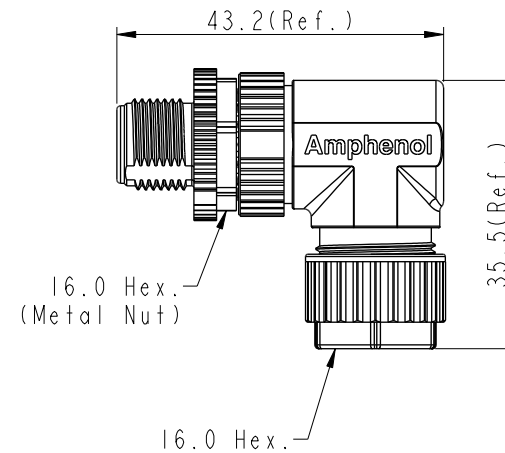



F	1		2		3		4		5		6		7		8	
E																
D																
C																
B																
A																

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C201542	2020/10/07	Vicky	△C X2
D	C210025	2021/01/19	Vicky	△D X1
E	C210561	2021/04/13	Vicky	△E X2

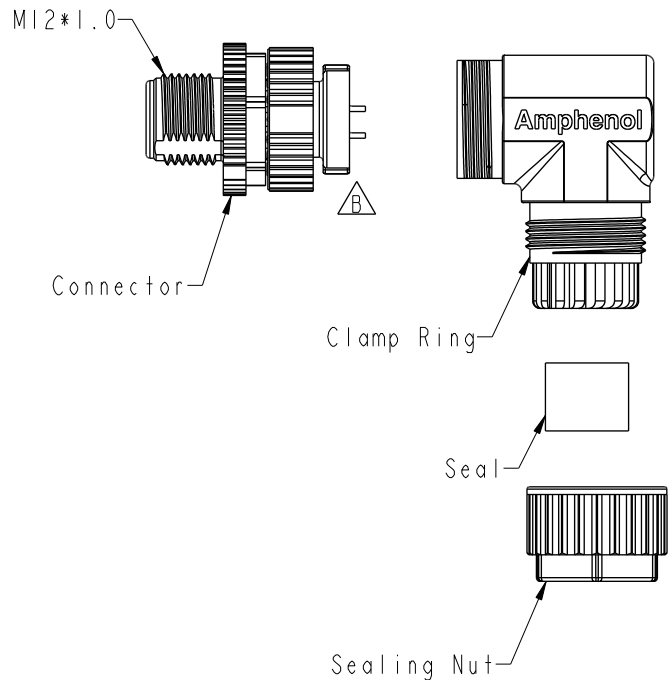

△C MI2D-XXBMMA-SR7001
XX: No. Of Pin



4P

Pin Assignments
Front View

- △E Note:
- * RoHS Compliant
 - * △△ Important Dimension
 - * Waterproof rate: IPX7, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Extension Nut: Thermoplastic, Black
 - △D Nut: Metal
 - O-Ring: Rubber, Gray
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seal: Rubber, Gray, OD:Ø4.0mm~Ø7.0mm
 - * One set unassembled in one pe bag

UNIT:mm		TITLE	
		N SEN, MI2 D, SCREW	
		CABLE W/O SR, M, M, FI SOLDER	
TOLERANCE		SCALE	SIZE
.X ±0.25		1:1	A4
.XX ±0.1			
.XXX ±0.05			
ANGLES ±1°		REV.	WC-REV.
		E	A.5
		△C Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO		DRAWN BY		DATE	
		JC Chen		2020-04-17	
DWG. NO		CHECKED BY		DATE	
△C MI2D-XXBMMA-SR7001		Li Feng		2020-04-17	
CUSTOMER		APPROVED BY		DATE	
ALTW		Jerry		2020-04-17	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.