
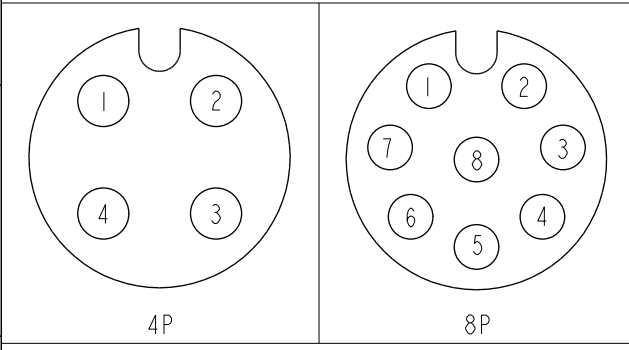
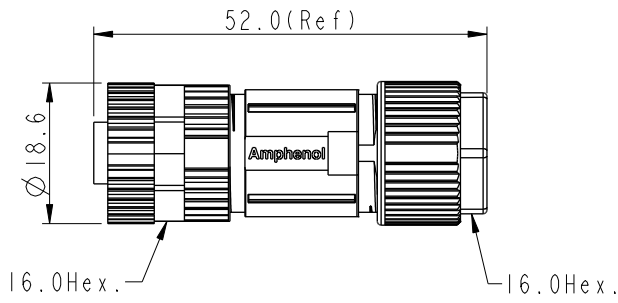
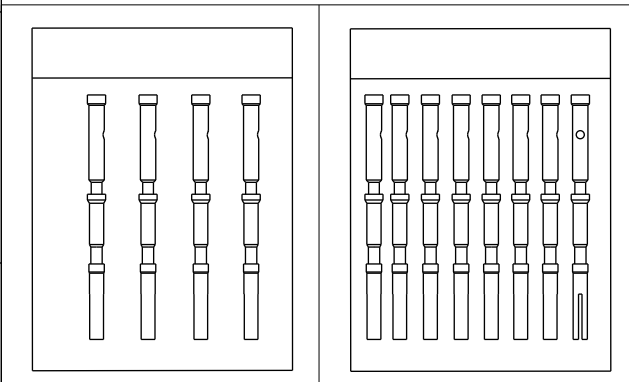


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

	1	2	3	4	5	6	7	8
F	8P	22~26	MSAS-08BFFC-SL7001	REV.	ECN NO.	DATE	SIGN	DESCRIPTION
	4P	20~24	MSAS-04BFFC-SL7001	D	C201453	2020/10/08	Ruru	△D X4
	Contacts	Applicable wire gauge	Item No.	E	C210561	2021/04/15	Vicky	△E X2
					F	C210977	Vicky	△F X1

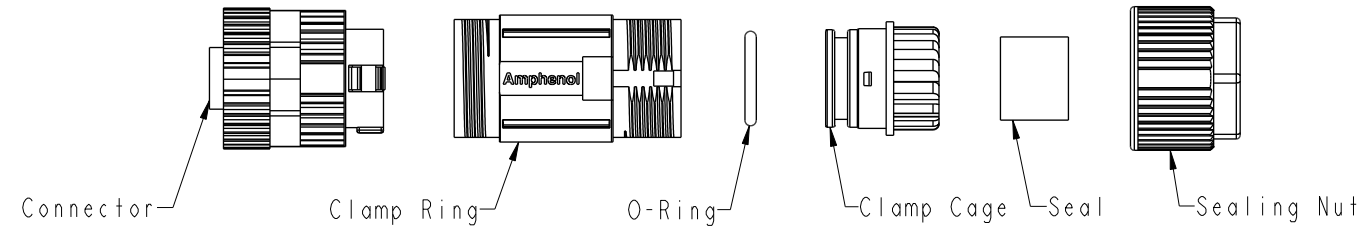

Pin Assignments
Front View

△D
MSAS-XXBFFC-SL7001
XX: No. Of Pin

- △E
Note:
- * RoHS Compliant
 - * △C Important Dimension
 - * Waterproof rate: IPX7, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Extension Nut: Metal
 - Nut: Metal
 - O-Ring: Rubber, Gray
 - * Clamp Ring: Metal
 - * O-Ring: Rubber, Gray
 - * Clamp Cage: Thermoplastic, Black
 - * Sealing Nut: Metal
 - △C * Seal: Rubber, Gray, OD:∅4.0mm~∅7.5mm
 - * One set unassembled in one pe bag

UNIT:mm			TITLE N SEN, M12 A -SHLD, SCREW CABLE W/O SR, F, F, FI/PANEL CRIMP
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE Free	SIZE A4	SHEET 1 OF 1
	REV. F	WC-REV. .0	△C Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Xiaofeng	2020-07-02
DWG NO △C MSAS-XXBFFC-SL7001	CHECKED BY	DATE
	Li-Feng	2020-07-02
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2020-07-02