
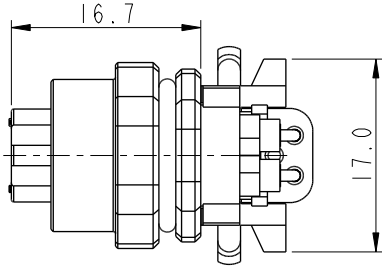

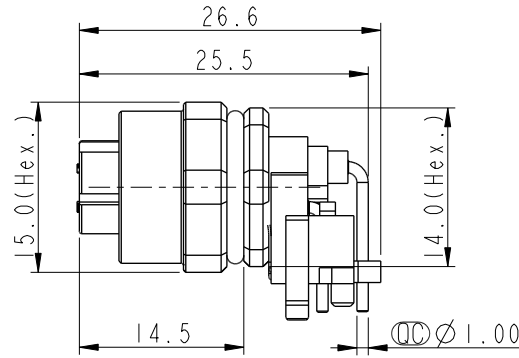


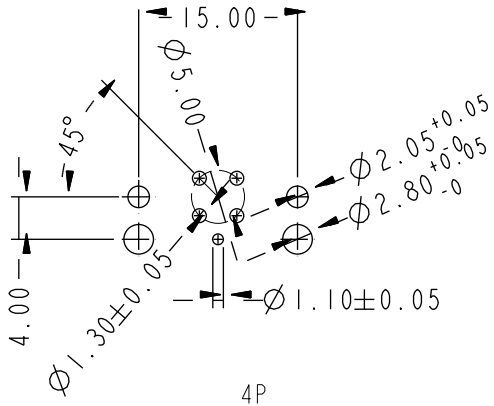
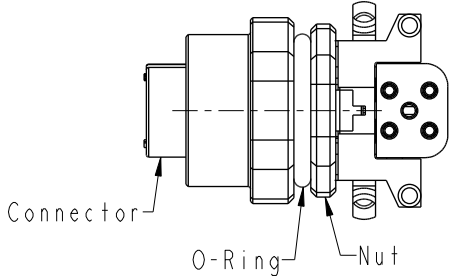


F	 Recommended Panel Cut-Out							
E		MSDS-XXPFFR-SF7003 XX: No. Of Pin						
D								
C								
B	 4P	 4P				Note:   * RoHS Compliant *  Important dimension * Waterproof rate: IPX7, mated * Connector - Housing: Thermoplastic, Black - Pin: Copper alloy, Gold plated  O-Ring1: Rubber, Gray - O-Ring2: Rubber, Gray  Nut: Metal  * Nut: Metal * O-Ring: Rubber, Gray * For panel thickness max: 3.0mm  * For pcb thickness max: 1.6mm  * Connector nut is packed separately in pe bag		
A	UNIT:mm  	TITLE N SEN, M12 D -SHLD, SCREW RECEPTACLE, F, F, PCB R  		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Yulong_wang	DATE 2016-12-11
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 3:2	SIZE A4	SHEET 1 OF 1	DWG NO  MSDS-XXPFFR-SF7003	CHECKED BY Jinhai	DATE 2016-12-11	DATE 2016-12-11
REV. G		WC-REV. A.2	 Inspection item		CUSTOMER ALTW	APPROVED BY Jerry	DATE 2016-12-11	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.