
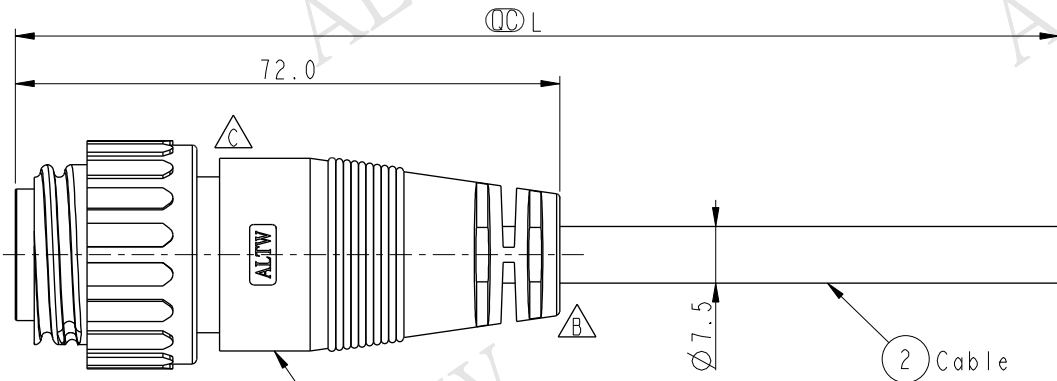



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8C0189~92	2008/10/30	Li Xiu Zhi	Change SR
C	LEN14C0115~18	2014/12/01	Sam	Update Logo&View.



① PWF-04AMMM-SL7000  
Color:Black

PWF-04AMMM-SL7AXX

XX:01~99Meter  
01:01Meter  
02:02Meters  
:  
:  
99:99Meters



Pin Assignments  
Front View 前視圖

4	Orange	橙
3	Red	紅
2	Brown	棕
1	Black	黑
Conn.	Wire Color	
	Pin Out	

Note:  
 \* Ⓞ Important Dimension.  
 \* Waterproof Rate : IP67.  
 \* Housing:Nylon+GF,Black.  
 \* Pin:Copper Alloy, Gold Plated.  
 \* Screw Nut:Nylon+GF,Black.  
 \* Cable: UL2464 16AWG\*4C+D+AL/My UV Resistant,OD=7.5mm,Black.  
 \* Cable Length Tolerance:01M:40mm  
 02M~05M: 60mm  
 06M~10M: 100mm  
 11M~30M: 200mm  
 31M~99M: 500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE 3+PE M Conn M Pin(12A) Screw Type For Cable			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A.1	Ⓞ: Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Sam	DATE 2014-12-01
DWG NO PWF-04AMMM-SL7AXX	CHECKED BY Vicky	DATE 2014-12-01
CUSTOMER ALTW	APPROVED BY Rita	DATE 2014-12-01