

FDS7060N7

30V N-Channel PowerTrench® MOSFET

General Description

This N-Channel MOSFET has been designed specifically to improve the overall efficiency of DC/DC converters using either synchronous or conventional switching PWM controllers. It has been optimized for "low side" synchronous rectifier operation, providing an extremely low R_{DS(ON)} in a small package.

Applications


· Synchronous rectifier


SO-8

· DC/DC converter

Features

- 19 A, 30 V. $R_{DS(ON)} = 5 \text{ m}\Omega \text{ @ }V_{GS} = 10 \text{ V}$ $R_{DS(ON)} = 7 \text{ m}\Omega @ V_{GS} = 4.5 \text{ V}$
- High performance trench technology for extremely low R_{DS(ON)}
- High power and current handling capability
- Fast switching, low gate charge (35nC typical)
- FLMP SO-8 package: Enhanced thermal performance in industry-standard package size





Absolute Maximum Ratings T_A=25°C unless otherwise noted

Symbol	Parameter		Ratings	Units
V _{DSS}	Drain-Source Voltage		30	V
V _{GSS}	Gate-Source Voltage		± 20	V
I _D	Drain Current - Continuous	(Note 1a)	19	Α
	- Pulsed		60	
P _D	Power Dissipation for Single Operation	(Note 1a)	3.0	W
T _J , T _{STG}	Operating and Storage Junction Temperature Range		–55 to +150	°C

Thermal Characteristics

$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	(Note 1a)	40	°C/W
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	(Note 1)	0.5	°C/W

Package Marking and Ordering Information

Device Marking	Device	Reel Size	Tape width	Quantity
FDS7060N7	FDS7060N7	13"	12mm	2500 units

Symbol	Parameter	Test Conditions	Min	Тур	Max	Units
Drain-So	Durce Avalanche Ratings (Note	2)		<u> </u>		
E _{AS}	Drain-Source Avalanche Energy	Single Pulse, V _{DD} =30V, I _D = 19A			360	mJ
I _{AS}	Drain-Source Avalanche Current				19	Α
Off Char	acteristics					
BV _{DSS}	Drain–Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$	30			V
ΔBV _{DSS} ΔT _J	Breakdown Voltage Temperature Coefficient	I_D = 250 μ A, Referenced to 25°C		23		mV/°C
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = 24 V, V _{GS} = 0 V			1	μА
I _{GSSF}	Gate–Body Leakage, Forward	V _{GS} = 20 V, V _{DS} = 0 V			100	nA
I _{GSSR}	Gate–Body Leakage, Reverse	V _{GS} = -20 V V _{DS} = 0 V			-100	nA
On Char	acteristics (Note 2)					
V _{GS(th)}	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_{D} = 250 \mu A$	1	1.5	3	V
$\Delta V_{GS(th)} \over \Delta T_J$	Gate Threshold Voltage Temperature Coefficient	I_D = 250 μA, Referenced to 25°C		-4.7		mV/°C
R _{DS(on)}	Static Drain–Source On–Resistance	$V_{GS} = 10 \text{ V}, I_D = 19 \text{ A}$ $V_{GS} = 4.5 \text{ V}, I_D = 16 \text{ A}$ $V_{GS} = 10 \text{ V}, I_D = 19 \text{ A}, T_J = 125^{\circ}\text{C}$		4.0 5.8 6	5 7 6.5	mΩ
I _{D(on)}	On-State Drain Current	V _{GS} = 10 V, V _{DS} = 5 V	60			Α
g _{FS}	Forward Transconductance	V _{DS} = 5 V, I _D = 19 A		78		S
Dynamic	Characteristics					
C _{iss}	Input Capacitance	$V_{DS} = 15 \text{ V}, V_{GS} = 0 \text{ V},$		3274		pF
Coss	Output Capacitance	f = 1.0 MHz		721		pF
C _{rss}	Reverse Transfer Capacitance	1		283		pF
Switchir	ng Characteristics (Note 2)					
t _{d(on)}	Turn-On Delay Time	$V_{DD} = 15 \text{ V}, I_D = 1 \text{ A},$		11	20	ns
t _r	Turn-On Rise Time	$V_{GS} = 5 \text{ V}, R_{GEN} = 6 \Omega$		8	16	ns
t _{d(off)}	Turn-Off Delay Time	7		60	96	ns
t _f	Turn–Off Fall Time	7		30	48	ns
Qg	Total Gate Charge	$V_{DS} = 15 \text{ V}, I_{D} = 19 \text{ A},$		35	56	nC
Q _{gs}	Gate–Source Charge	V _{GS} = 5 V		10		nC
Q_{gd}	Gate-Drain Charge	7		12		nC


Electrical Characteristics

T_A = 25°C unless otherwise noted


Symbol	Parameter	Test Conditions	Min	Тур	Max	Units
Drain-S	Drain-Source Diode Characteristics and Maximum Ratings					
Is	Maximum Continuous Drain-Source Diode Forward Current				2.5	Α
V _{SD}	Drain–Source Diode Forward Voltage	$V_{GS} = 0 \text{ V}, I_S = 2.5 \text{ A} \text{(Note 2)}$		0.7	1.2	V

Notes:

1. R_{0JA} is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. R_{0JC} is guaranteed by design while R_{0CA} is determined by the user's board design.



a) 40°C/W when mounted on a 1in² pad of 2 oz copper




85°C/W when mounted on a minimum pad of 2 oz copper

Scale 1: 1 on letter size paper

2. Pulse Test: Pulse Width < 300μs, Duty Cycle < 2.0%

Typical Characteristics

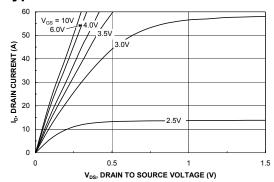

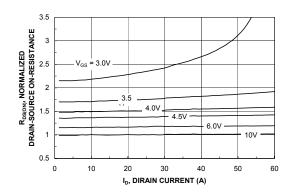
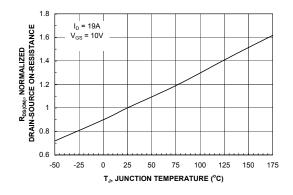


Figure 1. On-Region Characteristics.

Figure 2. On-Resistance Variation with Drain Current and Gate Voltage.



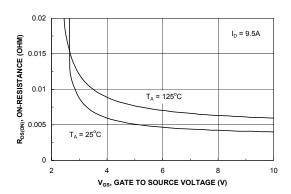
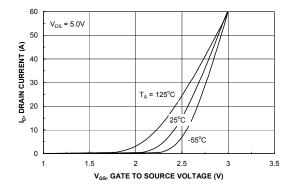


Figure 3. On-Resistance Variation withTemperature.

Figure 4. On-Resistance Variation with Gate-to-Source Voltage.



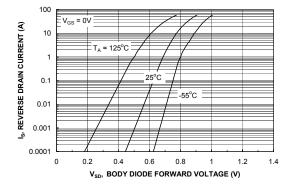
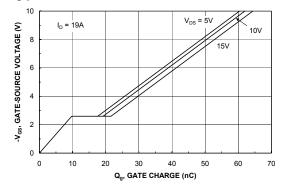


Figure 5. Transfer Characteristics.

Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature.

Typical Characteristics



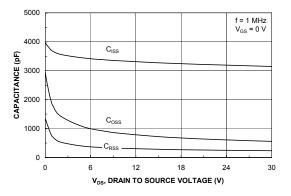

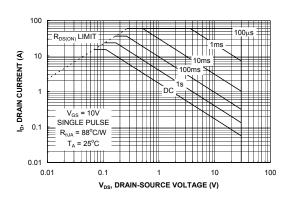


Figure 7. Gate Charge Characteristics.





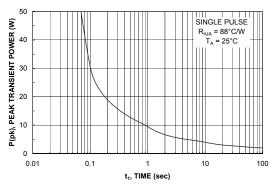


Figure 9. Maximum Safe Operating Area.

Figure 10. Single Pulse Maximum Power Dissipation.


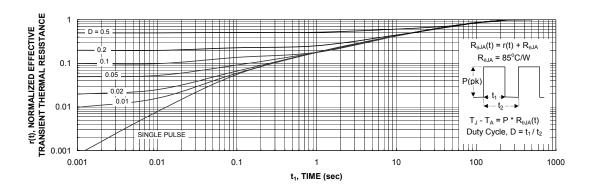


Figure 11. Transient Thermal Response Curve.

Thermal characterization performed using the conditions described in Note 1b. Transient thermal response will change depending on the circuit board design.

Dimensional Outline and Pad Layout

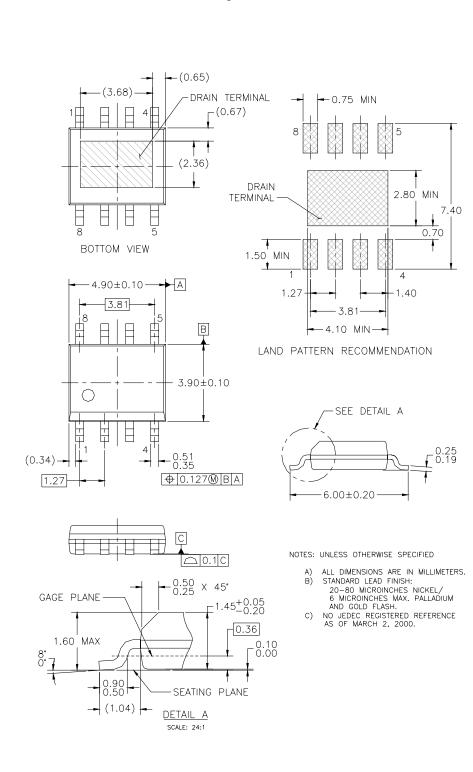

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FACT™	ImpliedDisconnect™	PACMAN™	SPM™
ActiveArray™	FACT Quiet Series™	ISOPLANAR™	POP™	Stealth™
Bottomless™	FAST®	LittleFET™	Power247™	SuperSOT™-3
CoolFET™	FASTr™	MicroFET™	PowerTrench®	SuperSOT™-6
CROSSVOLT™	FRFET™	MicroPak™	QFET™	SuperSOT™-8
DOME™	GlobalOptoisolator™	MICROWIRE™	QS™	SyncFET™
EcoSPARK™	GTO™ .	MSX™	QT Optoelectronics™	TinyLogic [®]
E ² CMOS TM	HiSeC™	MSXPro™	Quiet Series™	TruTranslation™
EnSigna™	I ² C TM	OCX™	RapidConfigure™	UHC™
Across the board.	Around the world.™	OCXPro™	RapidConnect™	UltraFET [®]
The Power Franch	nise™	OPTOLOGIC®	SILENT SWITCHER®	VCX™
Programmable Ac	tive Droop™	OPTOPLANAR™	SMART START™	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.