


3/16 Hex Jackscrew

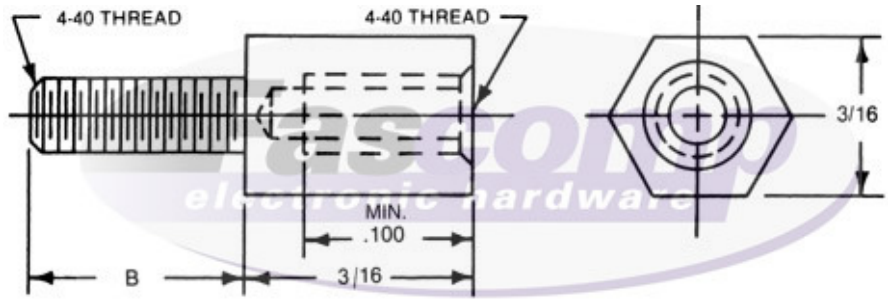

Create a part number:

Length	Material	Finish
FCXXXX	XX	XX
<div style="border-bottom: 1px solid black; margin-bottom: 5px;"></div> <div style="border-bottom: 1px solid black; margin-bottom: 5px;"></div> <div style="border-bottom: 1px solid black; margin-bottom: 5px;"></div> <div style="border-bottom: 1px solid black; margin-bottom: 5px;"></div>		

Part Number	
✓ FCXXXX	Length B
FC47501	3/16
FC47502	1/4
FC47503	5/16
FC47504	3/8
FC47505	7/16
FC47506	1/2
FC47507	9/16
FC47508	5/8
FC47509	11/16
FC47510	3/4

Material	
✓ Material Code (XX)	
B	Brass
S	Steel
SS	Stainless Steel

✓ Compatible Finish	
B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges



Fascomp Electronic Hardware
 7814 Kingspointe Pkwy
 Orlando, FL 32819
www.fascomp.com
 Tel: (407) 226-2112
 Fax: (407) 226-3370

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.

Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fascomp:

[FC47507-S-28](#) [FC47503-S-28](#) [FC47506-S-28](#) [FC47508-S-28](#) [FC47505-SS](#) [FC47504-S-28](#) [FC47505-S-12](#)
[FC47507-S-12](#) [FC47503-S-12](#) [FC47501-S-28](#) [FC47502-SS](#) [FC47504-S-12](#) [FC47506-SS](#) [FC47505-S-28](#) [FC47503-SS](#) [FC47506-S-12](#) [FC47507-SS](#) [FC47501-S-12](#) [FC47501-SS](#) [FC47504-SS](#) [FC47502-S-28](#) [FC47508-S-12](#)
[FC47508-SS](#) [FC47502-S-12](#)