

## General Description

The MC14069 is a general purpose hex unbuffered inverter. Each inverter has a single stage.

It operates over a recommended VDD power supply range of 3V to 15V referenced to VSS (usually ground).

Unused inputs must be connected to VDD, VSS, or another input.

## Features

- Wide supply voltage range from 3V to 15V
- Fully static operation
- 5V, 10V, and 15V parametric ratings
- Standardized symmetrical output characteristics
- Specified from -40°C to +85°C
- Packaging information: SOP14

## Order Information

Product Model	Package Type	Marking	Packing	Packing Qty
MC14069UBDR2G	SOP-14	14069	Tape	2500Pcs/Reel

## Block Diagram And Pin Description

### Block Diagram

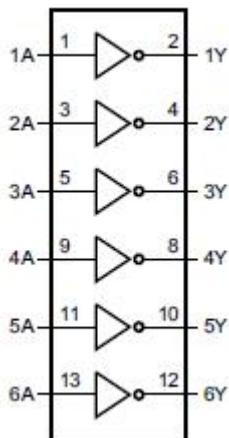


Figure 1. Logic diagram


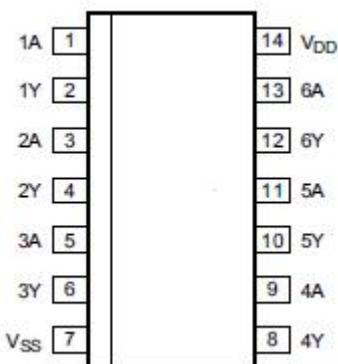


Figure 2. Schematic diagram (one inverter)

**Pin Configurations****Pin Description**

Pin No.	Pin Name	Description
1	1A	data input
2	1Y	data output
3	2A	data input
4	2Y	data output
5	3A	data input
6	3Y	data output
7	V <sub>SS</sub>	ground (0 V)
8	4Y	data output
9	4A	data input
10	5Y	data output
11	5A	data input
12	6Y	data output
13	6A	data input
14	V <sub>DD</sub>	supply voltage

**Function Table**

Input	Output
nA	nY
L	H
H	L

Note: H=HIGH voltage level; L=LOW voltage level.



## Electrical Parameter

### 3.1、Absolute Maximum Ratings

(Voltages are referenced to V<sub>SS</sub> (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Max.	Unit
supply voltage	V <sub>DD</sub>	-		-0.5	+18	V
DC input current	I <sub>IK</sub>	any one input		-	±10	mA
input voltage	V <sub>I</sub>	all inputs		-0.5	V <sub>DD</sub> +0.5	V
storage temperature	T <sub>stg</sub>	-		-65	+150	°C
total power dissipation	P <sub>tot</sub>	-		-	500	mW
device dissipation	P	per output transistor		-	100	mW
Soldering temperature	T <sub>L</sub>	10s	DIP	245	250	°C
			SOP			

Note:

- [1] For DIP14 packages: above 70°C the value of P<sub>tot</sub> derates linearly with 12mW/K.
- [2] For SOP14 packages: above 70°C the value of P<sub>tot</sub> derates linearly with 8mW/K.
- [3] For (T)SSOP14 packages: above 60°C the value of P<sub>tot</sub> derates linearly with 5.5mW/K.

### 3.2、Recommended Operating Conditions

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
supply voltage	V <sub>DD</sub>	-		3	-	15	V
ambient temperature	T <sub>amb</sub>	in free air		-40	-	+85	°C



### 3.3、Electrical Characteristics

#### 3.3.1、DC Characteristics 1

( $T_{amb}=25^{\circ}C$ , voltages are referenced to  $V_{SS}$  (ground=0 V), unless otherwise specified.)

Parameter	Symbol	Conditions (V)			$T_{amb}=25^{\circ}C$			Unit
		$V_o$	$V_{IN}$	$V_{DD}$	Min.	Typ.	Max.	
supply current	$I_{DD}$	-	0, 5	5	-	0.01	0.25	uA
		-	0, 10	10	-	0.01	0.5	uA
		-	0, 15	15	-	0.01	1	uA
LOW-level output current	$I_{OL}$	0.4	0, 5	5	0.51	1	-	mA
		0.5	0, 10	10	1.3	2.6	-	mA
		1.5	0, 15	15	3.4	6.8	-	mA
HIGH-level output current	$I_{OH}$	4.6	0, 5	5	-0.51	-1	-	mA
		2.5	0, 5	5	-1.6	-3.2	-	mA
		9.5	0, 10	10	-1.3	-2.6	-	mA
		13.5	0, 15	15	-3.4	-6.8	-	mA
LOW-level output voltage	$V_{OL}$	-	0, 5	5	-	0	0.05	V
		-	0, 10	10	-	0	0.05	V
		-	0, 15	15	-	0	0.05	V
HIGH-level output voltage	$V_{OH}$	-	0, 5	5	4.95	5	-	V
		-	0, 10	10	9.95	10	-	V
		-	0, 15	15	14.95	15	-	V
LOW-level input voltage	$V_{IL}$	0.5, 4.5	-	5	-	-	1	V
		1, 9	-	10	-	-	2	V
		1.5, 13.5	-	15	-	-	2.5	V
HIGH-level input voltage	$V_{IH}$	0.5	-	5	4	-	-	V
		1	-	10	8	-	-	V
		1.5	-	15	12.5	-	-	V
input leakage current	$I_I$	-	0, 15	15	-	$\pm 10^{-5}$	$\pm 0.1$	uA



### 3.3.2、DC Characteristics 2

(T<sub>amb</sub>=-40°C to +85°C, voltages are referenced to V<sub>SS</sub> (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions (V)			T <sub>amb</sub> =-40°C		T <sub>amb</sub> =+85°C		Unit
		V <sub>O</sub>	V <sub>IN</sub>	V <sub>DD</sub>	Min.	Max.	Min.	Max.	
supply current	I <sub>DD</sub>	-	0, 5	5	-	0.25	-	7.5	uA
		-	0, 10	10	-	0.5	-	15	uA
		-	0, 15	15	-	1	-	30	uA
LOW-level output current	I <sub>OL</sub>	0.4	0, 5	5	0.61	-	0.42	-	mA
		0.5	0, 10	10	1.5	-	1.1	-	mA
		1.5	0, 15	15	4	-	2.8	-	mA
HIGH-level output current	I <sub>OH</sub>	4.6	0, 5	5	-0.61	-	-0.42	-	mA
		2.5	0, 5	5	-1.8	-	-1.3	-	mA
		9.5	0, 10	10	-1.5	-	-1.1	-	mA
		13.5	0, 15	15	-4	-	-2.8	-	mA
LOW-level output voltage	V <sub>OL</sub>	-	0, 5	5	-	0.05	-	0.05	V
		-	0, 10	10	-	0.05	-	0.05	V
		-	0, 15	15	-	0.05	-	0.05	V
HIGH-level output voltage	V <sub>OH</sub>	-	0, 5	5	4.95	-	4.95	-	V
		-	0, 10	10	9.95	-	9.95	-	V
		-	0, 15	15	14.95	-	14.95	-	V
LOW-level input voltage	V <sub>IL</sub>	0.5, 4.5	-	5	-	1	-	1	V
		1, 9	-	10	-	2	-	2	V
		1.5, 13.5	-	15	-	2.5	-	2.5	V
HIGH-level input voltage	V <sub>IH</sub>	0.5	-	5	4	-	4	-	V
		1	-	10	8	-	8	-	V
		1.5	-	15	12.5	-	12.5	-	V
input leakage current	I <sub>I</sub>	-	0, 15	15	-	±0.1	-	±1	uA

### 3.3.3、AC Characteristics 1

(T<sub>amb</sub>=25°C, V<sub>SS</sub>=0V, t<sub>r</sub>, t<sub>f</sub>=20ns, C<sub>L</sub>=50pF, R<sub>L</sub>=200kΩ, unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
propagation delay time	t <sub>PHL</sub> , t <sub>PLH</sub>	see Figure 4	V <sub>DD</sub> =5V	-	55	110	ns
			V <sub>DD</sub> = 10V	-	30	60	ns
			V <sub>DD</sub> = 15V	-	25	50	ns
transition time	t <sub>THL</sub> , t <sub>T LH</sub>	see Figure 4	V <sub>DD</sub> =5V	-	100	200	ns
			V <sub>DD</sub> = 10V	-	50	100	ns
			V <sub>DD</sub> = 15V	-	40	80	ns
input capacitance	C <sub>I</sub>	any input		-	10	15	pF

## Testing Circuit

### AC Testing Circuit

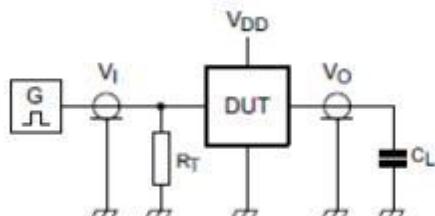


Figure 3. Test circuit for switching times

Definitions for test circuit:

DUT=Device Under Test.

C<sub>L</sub>=Load capacitance including jig and probe capacitance.

R<sub>T</sub>=Termination resistance should be equal to the output impedance Z<sub>o</sub> of the pulse generator.

### 4.2、AC Testing Waveforms

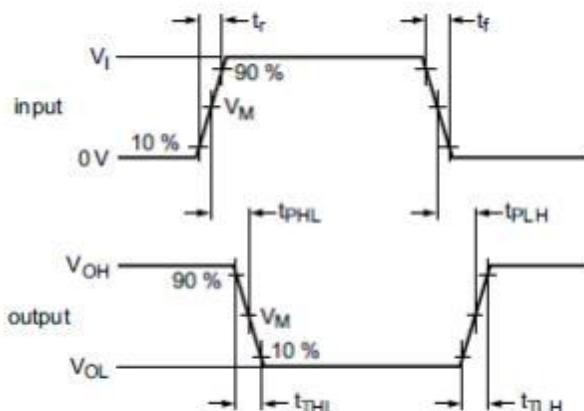


Figure 4. Propagation delay, output transition time

### 4.3、Measurement Points


Supply voltage	Input	Output
V <sub>DD</sub>	V <sub>M</sub>	V <sub>M</sub>
5V to 15V	0.5×V <sub>DD</sub>	0.5×V <sub>DD</sub>

### 4.4、Test Data

Supply voltage	Input	Load
V <sub>DD</sub>	V <sub>I</sub>	C <sub>L</sub>
5V to 15V	V <sub>SS</sub> or V <sub>DD</sub>	50pF



## Package Information

DIP14

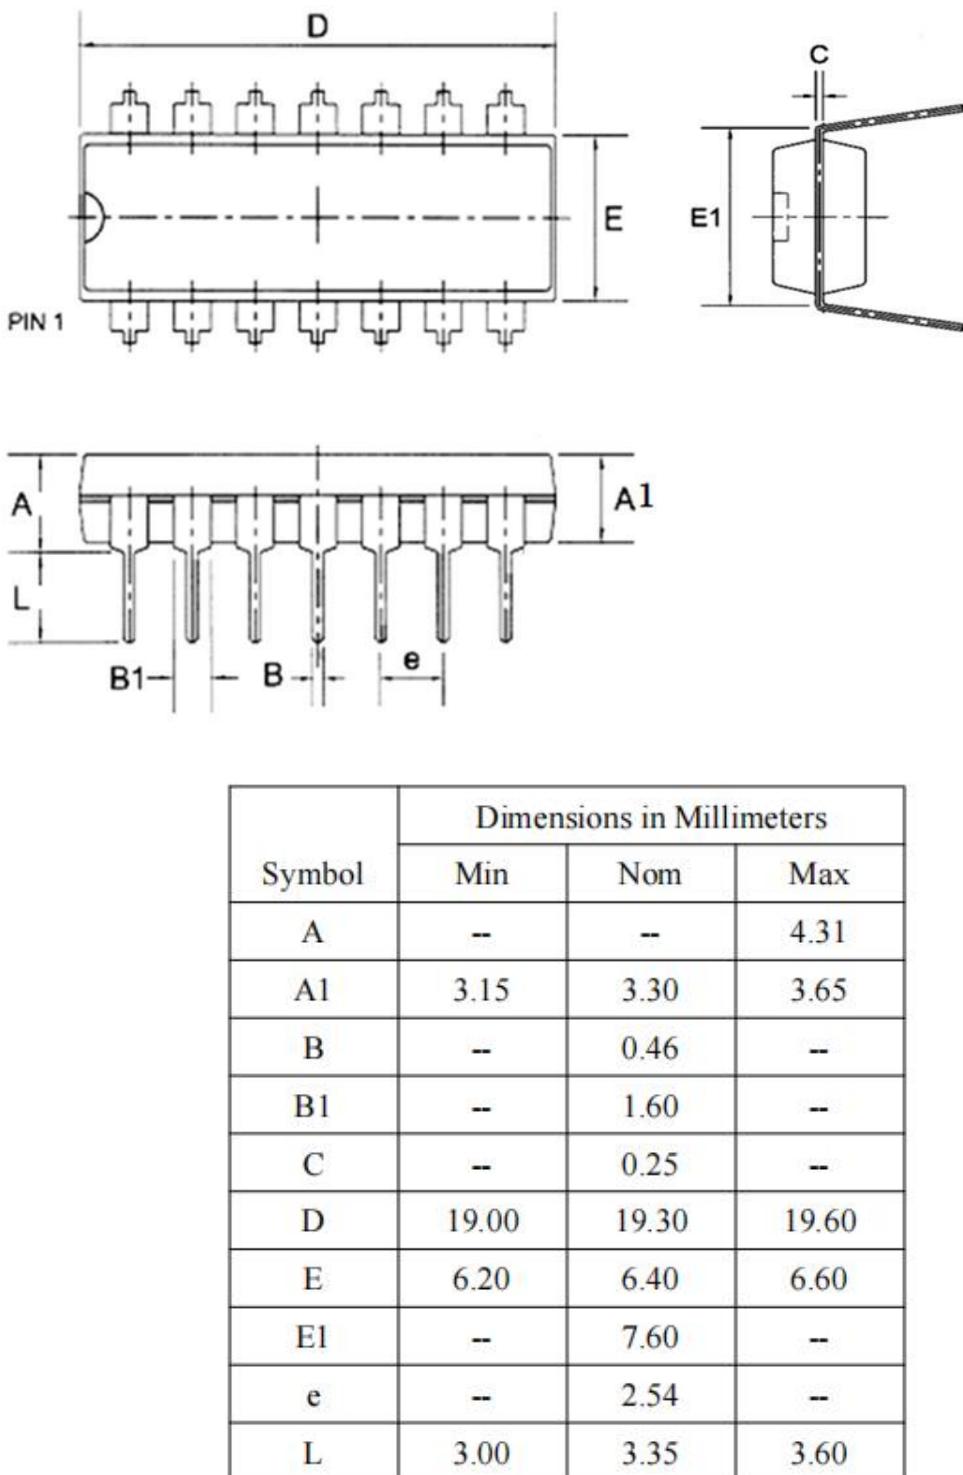




## SOP14

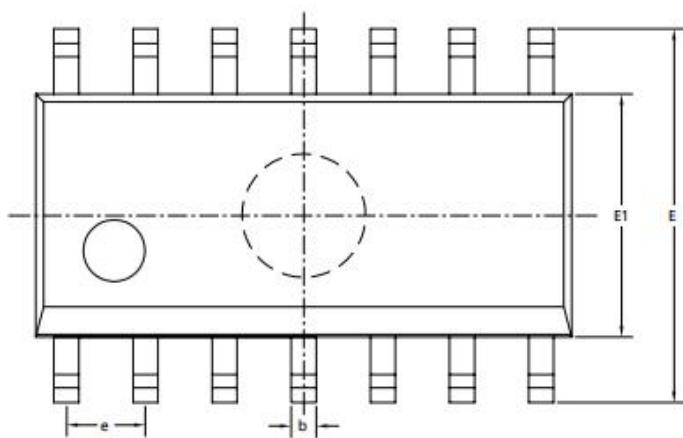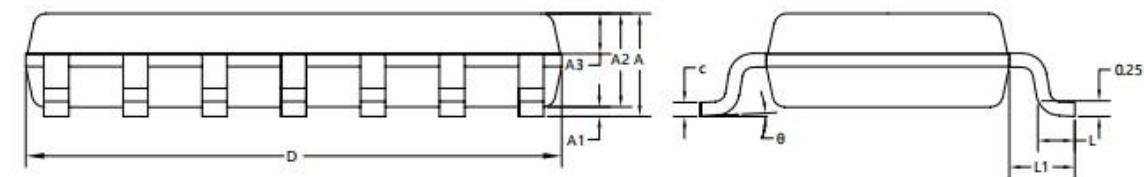



SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	1.50	1.60	1.70
A1	0.10	0.15	0.25
A2	1.40	1.45	1.50
A3	0.60	0.65	0.70
b	0.35	0.40	0.45
c	0.15	0.20	0.25
D	8.50	8.60	8.70
E	5.80	6.00	6.20
E1	3.85	3.90	3.95
e	1.27BSC		
L	0.50	0.60	0.70
L1	1.05REF		
θ	0*	4*	8*



TSSOP14

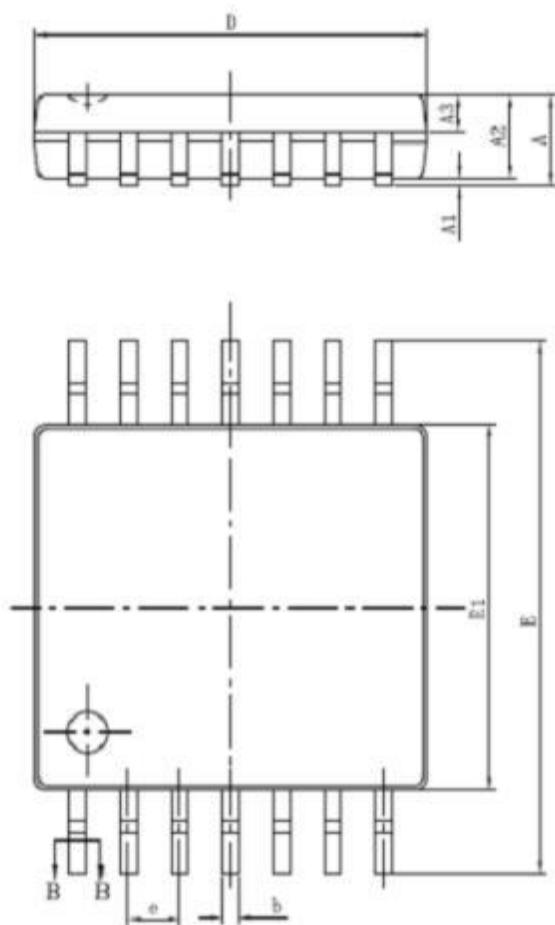

SYMBOL	MILLIMETER	
	MIN	MAX
A	—	1.20
A1	0.05	0.15
A2	0.90	1.05
A3	0.39	0.49
b	0.20	0.30
b1	0.19	0.25
c	0.13	0.19
c1	0.12	0.14
D	4.86	5.06
E1	4.30	4.50
E	6.20	6.60
e	0.65BSC	
L	0.45	0.75
L1	1.00BSC	
θ	0	8°

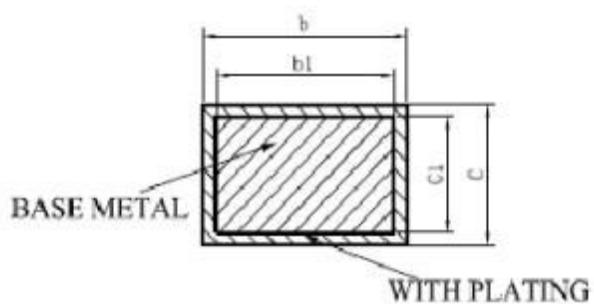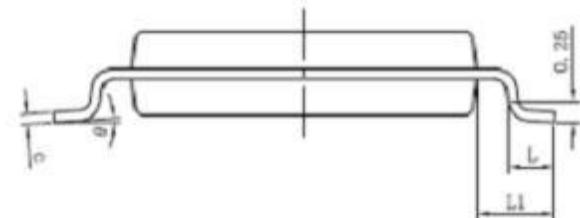

SECTION B-B



Statement:

- ✧ Shenzhen xinbole electronics co., ltd. reserves the right to change the product specifications, without notice! Before placing an order, the customer needs to confirm whether the information obtained is the latest version, and verify the integrity of the relevant information.
- ✧ Any semiconductor product is liable to fail or malfunction under certain conditions, and the buyer shall be responsible for complying with safety standards in the system design and whole machine manufacturing using Shenzhen xinbole electronics co., ltd products, and take appropriate security measures to avoid the potential risk of failure may result in personal injury or property losses of the situation occurred!
- ✧ Product performance is never ending, Shenzhen xinbole electronics co., ltd will be dedicated to provide customers with better performance, better quality of integrated circuit products.