



**Ferrule**  
**T&B Catalog Number:**

F2022  
78621033987  
Active

**UPC Number:**  
**Status:**  
**Description:**


Insulated Nylon Ferrule for Wire Size 20, Wire Size 0.5 mm<sup>2</sup>, Length 0.61 inches, White

**WEB\_USE**

US Cutsheet PDF Catalog Link <http://www-public.tnb.com/contractor/docs/stakon.pdf>

**Features**

Ferrules ensure reliable electrical connections when terminating conductors in screw clamp terminal blocks.

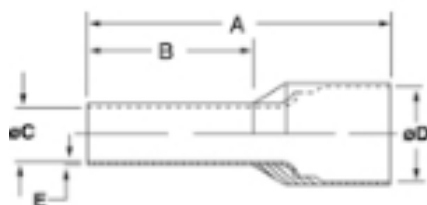

**General**

Ferrule Type	Insulated
Insulation Type	Insulated Nylon
Material	Copper
Finish	Electro -Tin Plated
Color	White
Wire Range	20
Wire Size (mm <sup>2</sup> )	.50

**Dimension Information**

A (mm)	15.5
B (mm)	10.0
Diameter C (inches)	.043
Diameter C (mm)	1.1
Diameter D (inches)	.098
Diameter D (mm)	2.5
E (mm)	.15
A (inches)	.610
B (inches)	.394
E (inches)	.006

**Specifications**

Temperature Rating	105°C
Voltage Rating	300V
Flammability Rating	UL 94 V-2

**Tooling**

Tool Charts	Available on Website
Application Tools	T1, T3, ERG2
Recommended Tool	T1, T3, ERG4

**Packaging**

T&B Order Multiple	500
T&B Inner Pack	500
Package in Units	5000
T&B Sold in UOM	Each
T&B Weight Per UOM	0.63 lbs. per 1000

**Application Support**

Overview	Available on Website
----------	----------------------

Wire Guide Tables

Available on Website

**Notes**

Ferrule dimensions conform to DIN 46228, Part 4.

**Certifications**

RoHS Compliance

Yes

**For further technical assistance, please contact us...**

Thomas & Betts - USA  
8155 T&B Blvd.  
Memphis, TN 38125  
www.tnb.com

T&B Technical Support  
MS 3B-50  
8155 T&B Blvd.  
Memphis, TN 38125

Hours: 7AM - 6PM CDT  
Monday-Friday  
Phone: (888) 862-3289  
Fax: (901) 252-1321  
Email:techsupport@tnb.com