

354080-E ✓ ACTIVE

ERNI | ERNI SMC

TE Internal #: 354080-E

PCB Mount Receptacle, Right Angle, Board-to-Board, 32 Position,
1.27 mm [.05 in] Centerline, Fully Shrouded, Gold (Au), Surface
Mount, ERNI SMC

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Assembly Type: **PCB Mount Receptacle**

PCB Mount Orientation: **Right Angle**

Connector System: **Board-to-Board**

Number of Positions: **32**

Number of Rows: **2**

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Columns	16
Number of Loaded Positions	32
Stackable	No
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Right Angle
Number of Positions	32
Number of Rows	2
Board-to-Board Configuration	Co-Planar, Orthogonal



Electrical Characteristics

Dielectric Withstanding Voltage (Max)	500 Vrms
---------------------------------------	----------

Body Features

Connector Profile	Standard
Primary Product Color	Black

Contact Features

PCB Contact Termination Area Plating Material Thickness	4 – 6 μm [157.48 – 236.22 μin]
Contact Layout	Matrix
Contact Shape & Form	Dual Beam
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Receptacle
Contact Current Rating (Max)	1.7 A

Termination Features

Termination Method to PCB	Surface Mount
---------------------------	---------------

Mechanical Attachment

Mounting Alignment Feature Length	.75 mm[.029 in]
PCB Mount Alignment Type	Locating Posts
PCB Mount Retention Type	Location Peg
Mating Alignment	With
Mating Alignment Type	Polarization
PCB Mount Retention	With
PCB Mount Alignment	With
Connector Mounting Type	Board Mount

Housing Features

Mating Entry Location	Side
Centerline (Pitch)	1.27 mm[.05 in]
Housing Material	LCP

Dimensions

Connector Length	25.4 mm[1 in]
Connector Height	3.85 mm[.151 in]



Connector Width	9.6 mm[.378 in]
Profile Height from PCB	3.85 mm[.151 in]
Row-to-Row Spacing	1.27 mm[.05 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Shielded	No
Circuit Application	Power & Signal

Industry Standards

Compatible With Agency/Standards Products	DIN, UL
Compatible With Approved Standards Products	UL
Industry Standard	IEC
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Reel Diameter	330 mm[12.99 in]
Packaging Quantity	560
Packaging Method	Tape & Reel

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability



Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




Also in the Series | ERNI SMC

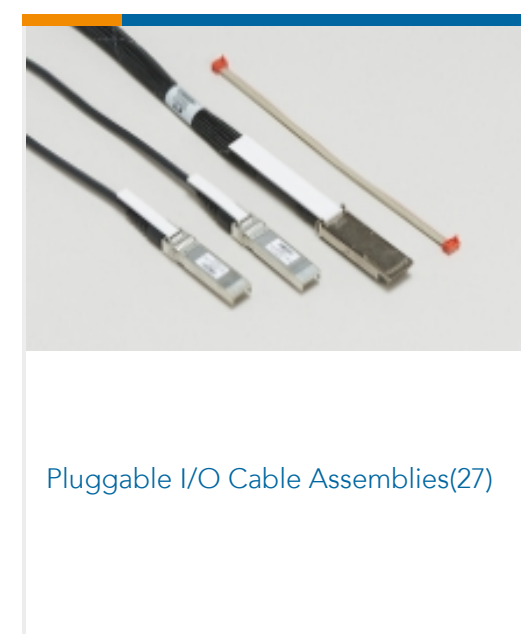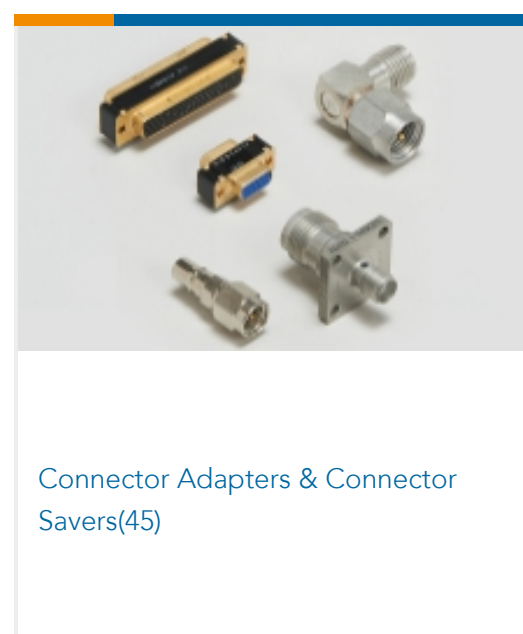

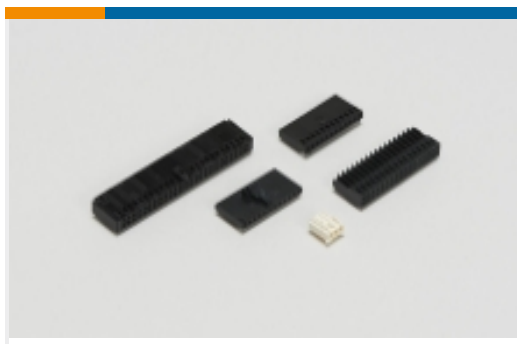Wire-to-Board Connector Assemblies
& Housings(5)

Customers Also Bought

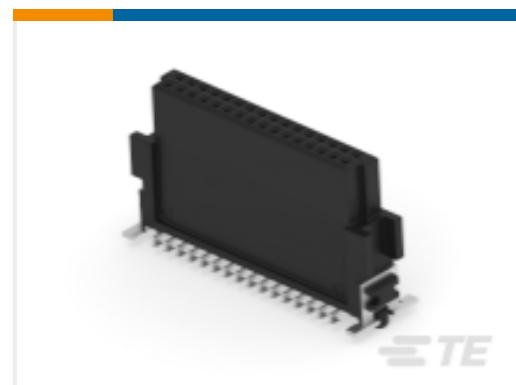TE Part #1-2007637-6
SFP+assy 2x2 EMI Spg Inner LP Sn
EnhanceTE Part #234041-E
M12 FEMALE, D CODE, 4P, 17MM
SMTTE Part #224064-E
M12 FEMALE, A CODE, 5P, 17MM
SMTTE Part #254206-E
M12 FEMALE, B CODE, 5P, 17MM
SMTTE Part #254589-E
SMCQ 32 M AB VV 8-13 CL * H007 137
E005TE Part #294919-E
SRCP 1,27 10 M 1 SMD 137 E1 094 *
GU-H *TE Part #354072-E
SMCB 32 F AB VV 7-23 CL * H007 137
E002TE Part #354096-E
SMCB 32 M AB VV 7-03 CL * 0007 137
E004TE Part #454643-E
M12 MALE, A CODE, 12P, 10.5MM
SMTTE Part #839795-E
IDCCS SRC 1,27 6 * SPX SPX 70 PVC

Documents

Product Drawings

[SMCQ 32 F AB VV 7-03 CL * 0007 137 E002](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_354080-E_1.3d_stp.zip](#)

English

Customer View Model



[ENG_CVM_CVM_354080-E_1.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_354080-E_1.3d_igs.zip](#)

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Datasheet - ERNI SMC 1.27mm Connectors](#)

English

[Datasheet - ERNI SMC 1.27mm Connectors](#)

German