


Features

- Low Zener Impedance
- Power Dissipation of 200mW
- High Stability and High Reliability
- Halogen free and RoHS compliant
- SOD323 surface mount package

Applications

- General voltage regulation
- Mobile & handheld systems

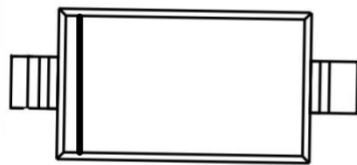

SOD323



Pin Configuration

Maximum Ratings & Thermal Characteristics


(Tamb=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Forward Voltage @ IF=10mA	VF	0.9	V
Power Dissipation	PD	200	mW
Thermal Resistance (Junction-to-Ambient)	RθJA	625	°C/W
Thermal Resistance (Junction-to-Case)	RθJC	337	°C/W
Junction Temperature Range	TJ	-55 ~ +150	°C
Storage Temperature Range	TSTG	-65 ~ +150	°C

Electrical Characteristics (TA=25°C unless otherwise specified)


Device	Zener Voltage Range				Maximum Zener Impedance			Maximum Reverse Current		Typical Temperature coefficient @ IZTC=mV/°C		Test Current IZTC
	Vz@Izt			Izt	Zzt @Izt	Zzk @Izk	Izk	IR	VR	Min	Max	
	Nom(V)	Min(V)	Max(V)	mA	Ω		mA	uA	V	Min	Max	
BZT52C2V7S	2.7	2.5	2.9	5	100	600	1.0	20	1.0	-3.5	0	5

Typical Characteristics Curves

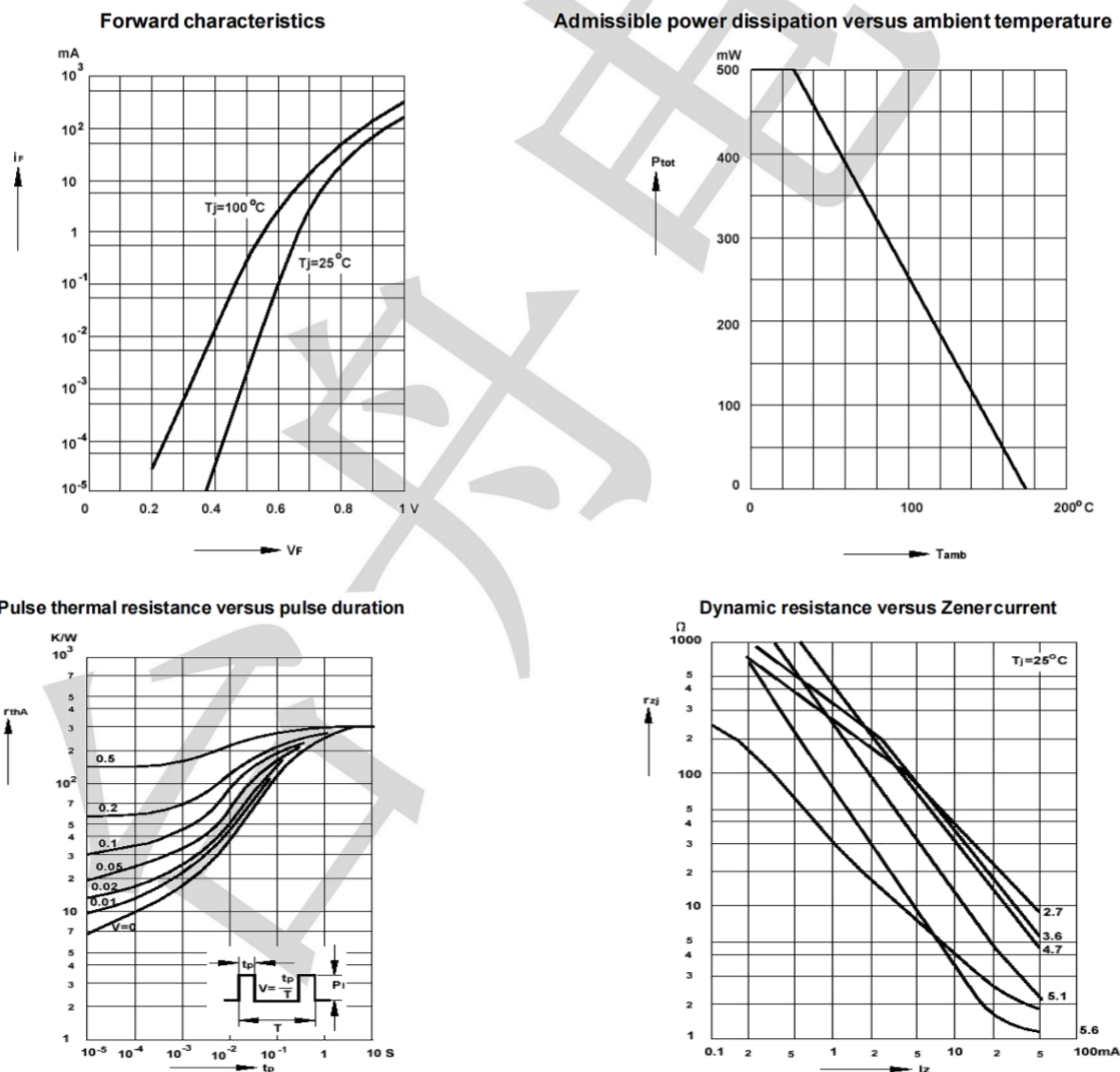


Typical Characteristics Curves


Capacitance versus Zener voltage

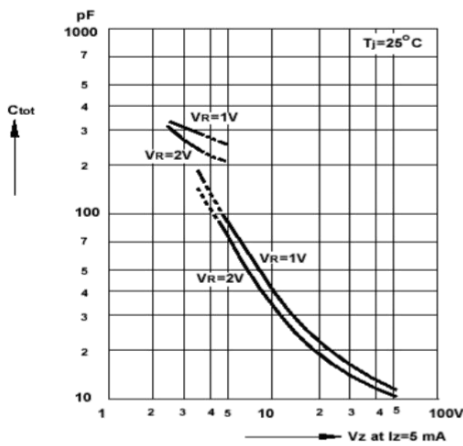


Dynamic resistance versus Zener current

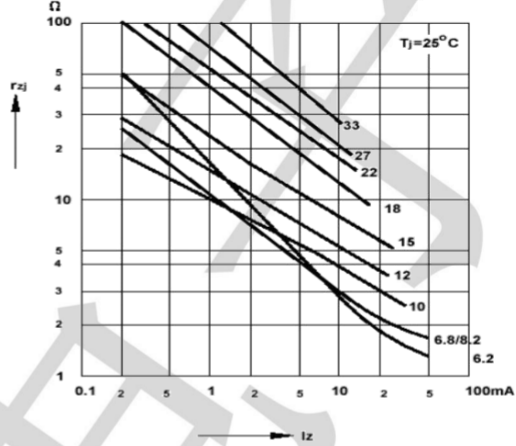


Dynamic resistance versus Zener current

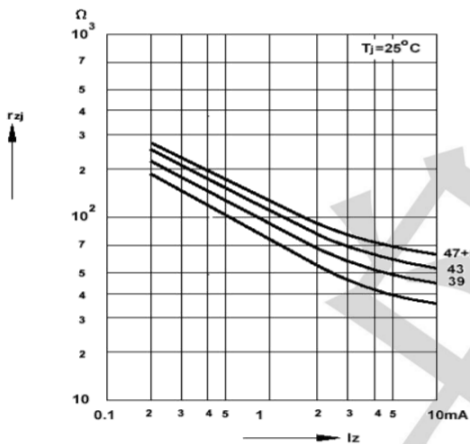


Thermal differential resistance versus Zener voltage

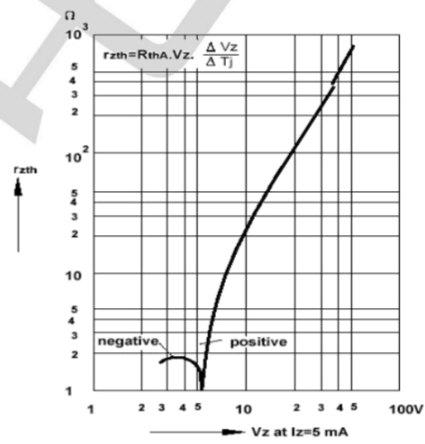

Dynamic resistance versus Zener voltage

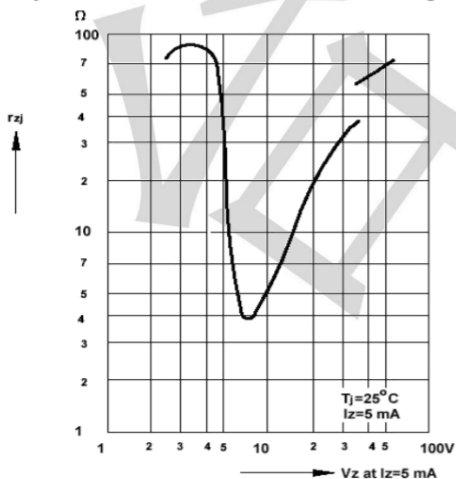


Temperature dependence of Zener voltage versus Zener voltage

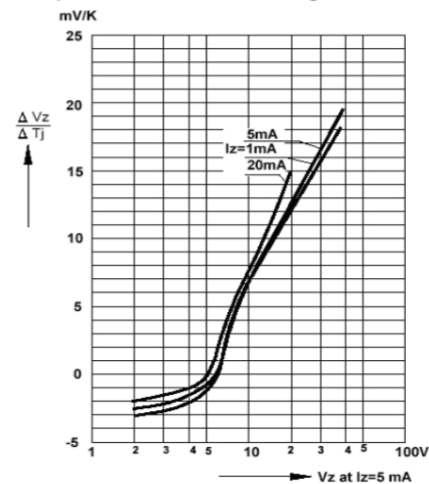

Package Outline Dimensions (unit: mm)

SOD323

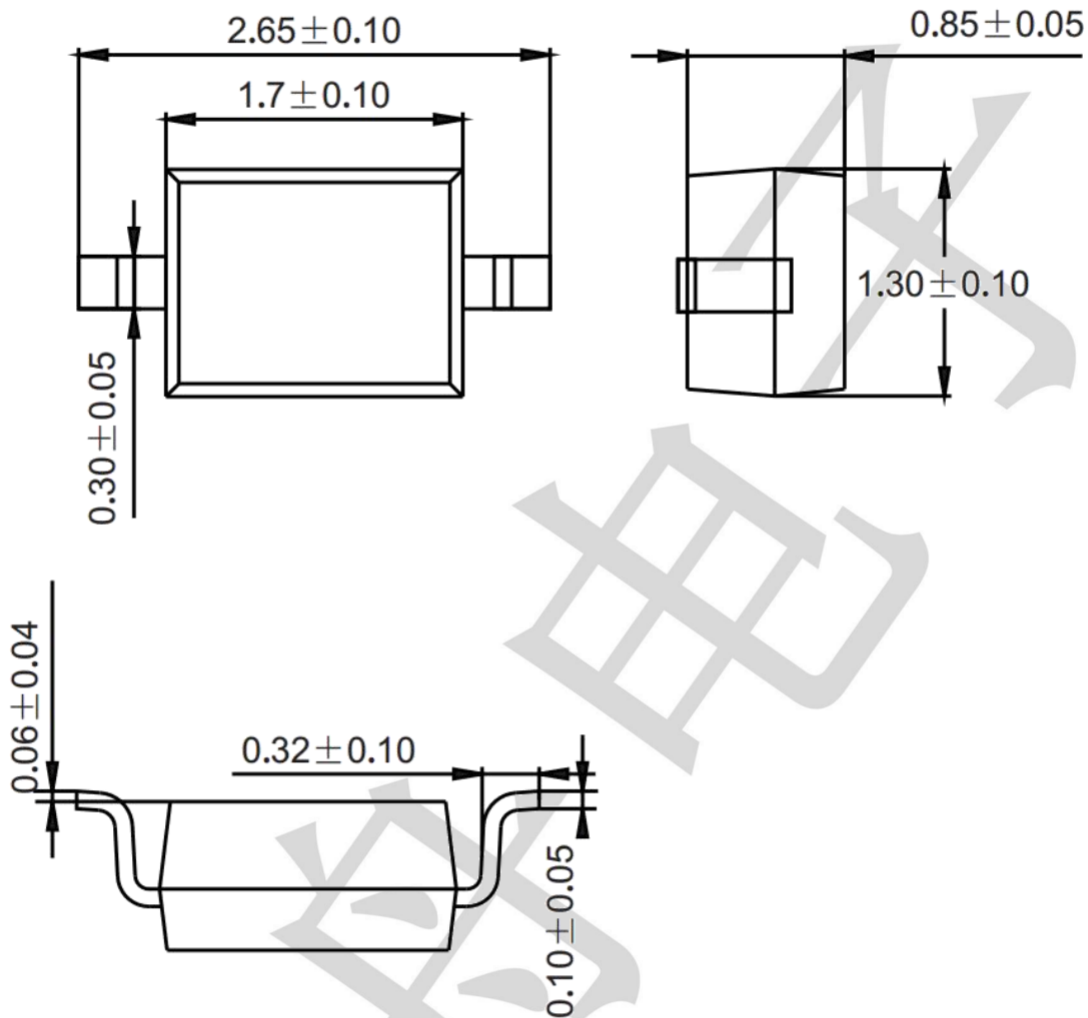

Mounting Pad Layout (unit: mm)

