# 1-1734037-6 ACTIVE

### CHAMP | CHAMP .050 Series I

TE Internal #: 1-1734037-6


PCB Mount Receptacle, Right Angle, Board-to-Board, 160 Position, 1.27 mm [.05 in] Centerline, Gold Flash, Through Hole - Solder,

CHAMP .050 Series I

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles

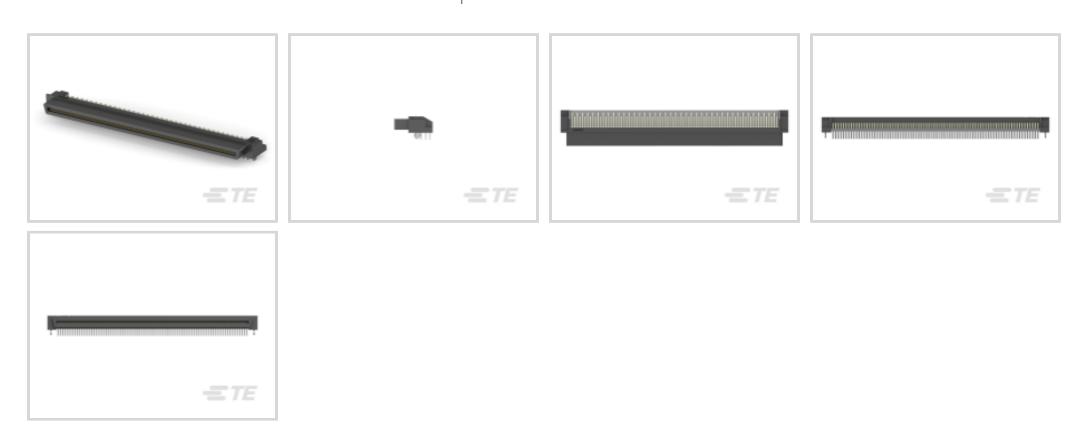

PCB Connector Assembly Type: PCB Mount Receptacle

PCB Mount Orientation: Right Angle
Connector System: Board-to-Board

Number of Positions: 160

Centerline (Pitch): 1.27 mm [ .05 in ]

### **Features**

### **Product Type Features**

PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Stackable	No
PCB Mount Orientation	Right Angle
Number of Positions	160
Electrical Characteristics	
Dielectric Withstanding Voltage (Max)	750 VAC
Insulation Resistance	4 MΩ
Operating Voltage	250 VAC
Body Features	

Brass

PCB Retention Feature Material



PCB Retention Feature Plating Material	Tin
Connector Profile	Standard
Primary Product Color	Black
Contact Features	
PCB Contact Termination Area Plating Material Thickness	3.81 μm[149.9997 μin]
Contact Layout	Matrix
Mating Tab Width	.75 mm[.03 in]
Mating Tab Thickness	.3 mm[.012 in]
PCB Contact Termination Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold Flash
	30 µin
Contact Type	Socket
Contact Current Rating (Max)	1 A
Termination Features	
Rectangular Termination Post & Tail Thickness	.31 mm[.012 in]
Rectangular Termination Post & Tail Width	.5 mm[.02 in]
Termination Post & Tail Length	3.1 mm[.122 in]
Termination Method to PCB	Through Hole - Solder
Mechanical Attachment	
PCB Mount Retention Type	Boardlock
Mating Alignment	With
Mating Alignment Type	Polarized
PCB Mount Retention	With
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	1.27 mm[.05 in]
Housing Material	Matte
Dimensions	
Connector Height	7.65 mm[.301 in]



### **Usage Conditions**

Housing Temperature Rating	High
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
Operation/Application	
Assembly Process Feature	None
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	1
Packaging Method	Package

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach



# Compatible Parts



### Also in the Series | CHAMP .050 Series |

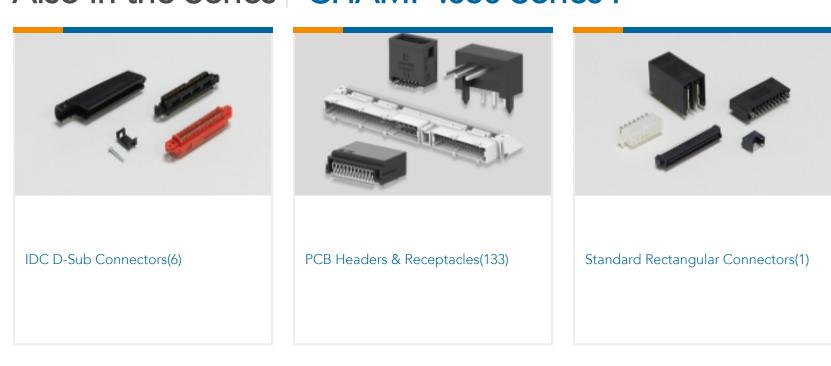

6P VAL-U-LOK R/A HDR V2

# Customers Also Bought

MJ,LPF,R/A,6P/6C,SHLD,PNL GRD



Champ050 series,68pos,Au over PdNi

PCIE GEN4 CON,SMT,164POS,30u",

MYLAR,HT







### **Documents**

### **Product Drawings**

Champ 050 series 160pos, Au over PdNi

English

#### **CAD Files**

**Customer View Model** 

ENG\_CVM\_CVM\_1-1734037-6\_G.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1-1734037-6\_G.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-1734037-6\_G.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### **Product Specifications**

**Application Specification** 

English

CHAMP .050 High Density Connector

English

**Application Specification** 

English