

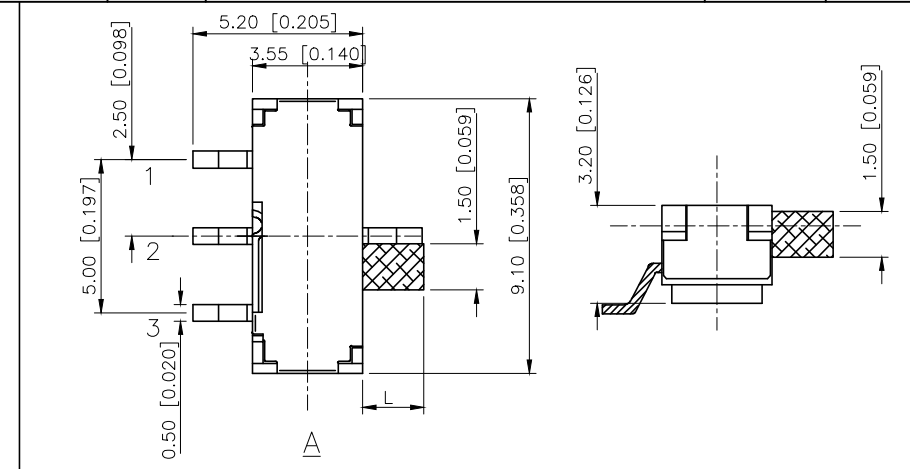
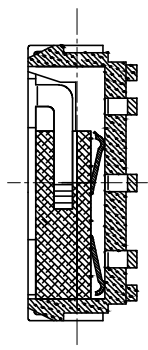
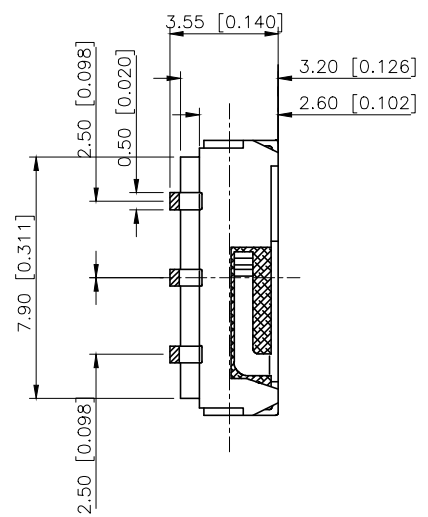
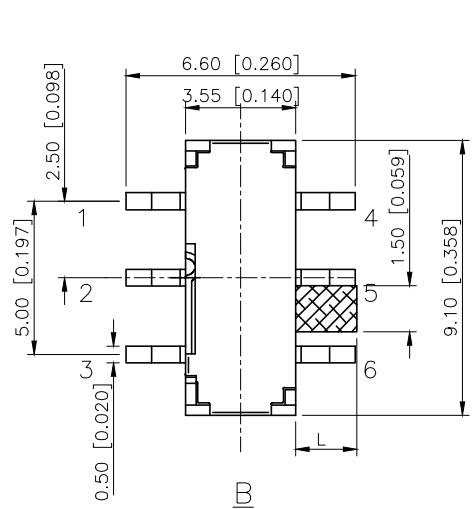


REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
A0	N/A		INITIAL RELEASE	/
A1	N/A		图面升级整理图面	2025.06.16

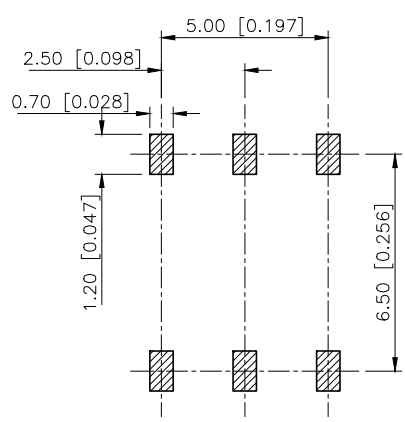


NOTE:
Rating: DC 12V 50mA
Operating Force:200±100gf
Lifetime:10,000 Cycles

PAPT NO	L	foot	
SK-3245S-L1-X	L1:2.00	A	B
SK-3245S-L2-X	L2:2.50	A	B
SK-3245S-L3-X	L3:3.00	A	B
SK-3245S-L4-X	L4:4.00	A	B



PCB LAYOUT

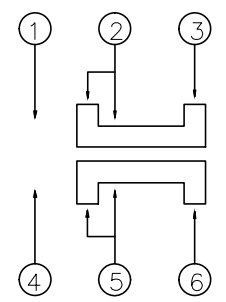

SCHEMATIC

5	Terminal	6	Brass(0.30t)	ag Plated
4	Contact spring	1	Phosphor branze	ag Plated
3	Base	1	PA46	Black
2	Cover	1	Sus	Natural
1	Keystake	1	PA46	Black
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	SLIDE SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	SK-3245S-X-X
APPROVED		SIZE:	A4	DWG NO.:	