



Connectors > Pluggable IO Connectors & Cages > zSFP+ Cage Assembly: EMI Springs



Pluggable I/O Product Type: **Cage Assembly**  
 Sealable: **No**  
 Circuit Application: **Signal**  
 Operating Temperature Range: **-55 – 105 °C [-67 – 221 °F]**  
 Data Rate (Max): **28 Gb/s**

[All zSFP+ Cage Assembly: EMI Springs \(24\)](#)

## Features

### Product Type Features

Cage Type	Ganged
Pluggable I/O Product Type	Cage Assembly
Sealable	No
Form Factor	zSFP+

### Configuration Features

Number of Ports	4
Port Matrix Configuration	1 x 4

### Electrical Characteristics

Data Rate (Max)	28 Gb/s
-----------------	---------

### Termination Features

Termination Post & Tail Length	2.05 mm[.071 in]
Termination Method to PCB	Through Hole - Press-Fit

### Housing Features

--	--



Cage Material	Nickel Silver Alloy
---------------	---------------------

### Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

### Operation/Application

Pluggable I/O Applications	EMI Enhanced
----------------------------	--------------

Heat Sink Compatible	No
----------------------	----

Circuit Application	Signal
---------------------	--------

### Packaging Features

Packaging Method	Tray
------------------	------

### Other

Included Lightpipe	No
--------------------	----

EMI Containment Feature Type	Internal/External EMI Springs
------------------------------	-------------------------------

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # CAT-C11-N490333  
QSFP28-Four SFP+ Cable Assembly: 30 AWG



TE Part # CAT-C11-N490325  
QSFP28-Four SFP+ Cable Assembly: 26 AWG



TE Part # 2334985-2  
SFP28 DIRECT ATTACH CA, 1M, 32AWG



TE Part # CAT-C11-N4901114  
SFP28 to SFP28 Cable Assembly: 30 AWG



TE Part # CAT-C11-N49011  
SFP28 to SFP28 Cable Assembly: 26 AWG



TE Part # CAT-Q17-N49011  
QSFP56-Four SFP56 Cable Assembly: 30 AWG



TE Part # CAT-Q17-N490333  
QSFP56-Four SFP56 Cable Assembly: 26 AWG



TE Part # 4-2821224-5  
SFP56 DIRECT ATTACH CA, 3M, 26AWG



TE Part # 4-2334985-2  
SFP56 DIRECT ATTACH CA, 1M, 32AWG



TE Part # CAT-C11-N490111  
SFP28 to SFP28 Cable Assembly: 28 AWG




TE Part # 4-2821222-5  
SFP56 DIRECT ATTACH CA, 2M, 30AWG



TE Part # 2185239-7  
ASSY SEATING TOOL, SFP+

## Customers Also Bought

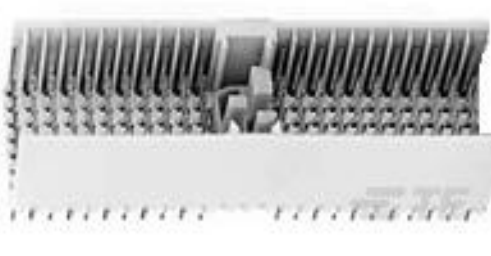

TE Part #5100668-1  
Z-PACK M.ASSY.154P.




TE Part #3-1462037-1  
IM42GR =IM RELAY 100mW 4.5V BIS



TE Part #3-2176070-6  
3521 300R 1% 2W



TE Part #10142048-22  
HTU31D I.C 31D RH/T DIGITAL R5000

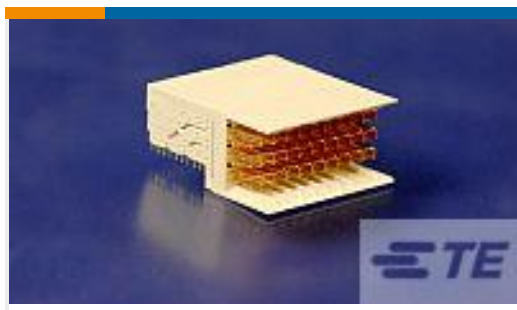

TE Part #6469183-1  
HMZD 3PR RA HDR 60P ASSY LF



TE Part #6469081-1  
HMZD 3PR, RECEPTACLE ASSEMBLY




TE Part #6469001-1  
HM-ZD 4PR RECP 80P



TE Part #5223979-1  
UPM GUIDE MODULE



TE Part #1-1469491-4  
MULTIGIG RT GUIDE PIN, 9MM 5.70

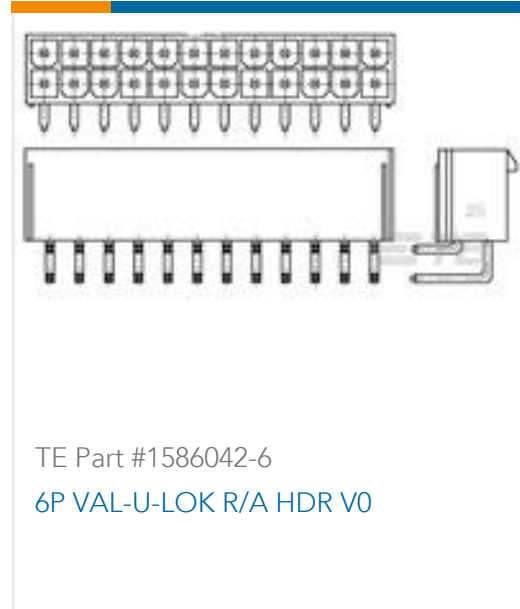

TE Part #1586042-6  
6P VAL-U-LOK R/A HDR V0

## Documents

### Product Drawings

[zSFP+ 1x4 Cage Assembly, Press-Fit](#)

English

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_2300275-1\\_A.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2300275-1\\_A.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2300275-1\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications

[Application Specification](#)

English