



SIRIUS safety relay Basic unit Standard series Relay enabling circuits 3 NO contacts plus Relay signaling circuit 1 NC contact $U_s = 24\text{ V AC/DC}$ Spring-type terminal (push-in)

product brand name	SIRIUS
product category	Safety relays
product designation	safety relays
design of the product	Relay enabling circuits
product type designation	3SK1
product line	Standard basic unit
Product Function	
product function parameterizable	sensor floating / sensor non-floating, monitored start-up / automatic start
product function	
• automatic start	Yes
• light barrier monitoring	Yes
• protective door monitoring	Yes
• magnetically operated switch monitoring NC-NO	No
• magnetically operated switch monitoring NC-NC	Yes
• laser scanner monitoring	Yes
• light array monitoring	Yes
• EMERGENCY OFF function	Yes
• monitored start-up	Yes
• pressure-sensitive mat monitoring	No
suitability for interaction press control	No
suitability for use	
• monitoring of floating sensors	Yes
• monitoring of non-floating sensors	Yes
• position switch monitoring	Yes
• EMERGENCY-OFF circuit monitoring	Yes
• opto-electronic protection device monitoring	Yes
• magnetically operated switch monitoring	Yes
• safety switch	Yes
• safety-related circuits	Yes
General technical data	
certificate of suitability UL approval	Yes
product feature cross-circuit-proof	Yes
power loss [W] maximum	2 W
insulation voltage rated value	300 V
degree of pollution	3
overvoltage category	3
surge voltage resistance rated value	4 000 V
protection class IP of the enclosure	IP20
shock resistance	10g / 11 ms
operating frequency maximum	360 1/h

mechanical service life (operating cycles) typical	10 000 000
thermal current of the switching element with contacts maximum	5 A
recovery time after opening of the safety circuits typical	10 ms
make time with automatic start	
• typical	200 ms
• at DC maximum	320 ms
• at AC maximum	320 ms
• after power failure typical	200 ms
• after power failure maximum	320 ms
make time with monitored start	
• typical	15 ms
• maximum	20 ms
backslide delay time after opening of the safety circuits typical	10 ms
backslide delay time in the event of power failure	
• typical	65 ms
• maximum	75 ms
reference code according to IEC 81346-2	F
Substance Prohibittance (Date)	11/05/2012
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 4,4'-isopropylidenediphenol (Bisphenol A, BPA) - 80-05-7
Ambient conditions	
installation altitude at height above sea level maximum	4 000 m; Derating, see Product Notification 109792701
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C
relative humidity during operation	10 ... 95 %
air pressure according to SN 31205	90 ... 106 kPa
Electromagnetic compatibility	
installation environment regarding EMC	This product is suitable for Class B environments and can also be used in domestic environments.
EMC emitted interference	IEC 60947-5-1, IEC 61000
Safety related data	
stop category according to IEC 60204-1	0
IEC 62061	
SIL Claim Limit (subsystem) according to EN 62061	3
PFHD with high demand rate according to IEC 62061	1.7E-9 1/h
ISO 13849	
category according to EN ISO 13849-1	4
performance level (PL)	
• according to ISO 13849-1	e
IEC 61508	
safety device type according to IEC 61508-2	Type A
Average probability of failure on demand (PFDavg) with low demand rate acc. to IEC 61508	1E-6 1/y
PFDavg with low demand rate according to IEC 61508	1E-6
Safe failure fraction (SFF)	99 %
hardware fault tolerance according to IEC 61508	1
T1 value for proof test interval or service life according to IEC 61508	20 a
Electrical Safety	
touch protection against electrical shock	finger-safe
Short-circuit protection	
design of the fuse link	
• for short-circuit protection of the NO contacts of the relay outputs required	gL/gG: 6A or circuit breaker type A: 3A or circuit breaker type B: 2A or circuit breaker type C: 1A
• for short circuit protection of the NC contacts of the relay outputs required	Diazed or Neozed fuses, operating class gL/gG: 6 A or MCB type A: 2 A or MCB type B: 2 A or MCB type C: 1 A
Inputs	
design of input	
• cascading input/functional switching	No

<ul style="list-style-type: none"> • feedback input 	Yes
<ul style="list-style-type: none"> • start input 	Yes
pulse duration	
<ul style="list-style-type: none"> • of the sensor input minimum 	150 ms
<ul style="list-style-type: none"> • of the ON pushbutton input minimum 	0.015 s
number of sensor inputs 1-channel or 2-channel	1
Outputs	
number of outputs as contact-affected switching element	
<ul style="list-style-type: none"> • as NC contact <ul style="list-style-type: none"> — for signaling function instantaneous contact 	1
<ul style="list-style-type: none"> • as NO contact <ul style="list-style-type: none"> — safety-related instantaneous contact — safety-related delayed switching 	3 0
switching capacity current of the NO contacts of the relay outputs at DC-13	
<ul style="list-style-type: none"> • at 24 V 	5 A
<ul style="list-style-type: none"> • at 115 V 	0.2 A
<ul style="list-style-type: none"> • at 230 V 	0.1 A
switching capacity current of the NO contacts of the relay outputs at AC-15	
<ul style="list-style-type: none"> • at 115 V 	5 A
<ul style="list-style-type: none"> • at 230 V 	5 A
switching capacity current of the NC contacts of the relay outputs at DC-13	
<ul style="list-style-type: none"> • at 24 V 	1 A
<ul style="list-style-type: none"> • at 115 V 	0.2 A
<ul style="list-style-type: none"> • at 230 V 	0.1 A
switching capacity current of the NC contacts of the relay outputs at AC-15	
<ul style="list-style-type: none"> • at 24 V 	2 A
<ul style="list-style-type: none"> • at 115 V 	1.5 A
<ul style="list-style-type: none"> • at 230 V 	1.5 A
total current maximum	12 A
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
<ul style="list-style-type: none"> • at 50 Hz rated value 	24 V
<ul style="list-style-type: none"> • at 50 Hz rated value 	24 ... 24 V
<ul style="list-style-type: none"> • at 60 Hz rated value 	24 V
<ul style="list-style-type: none"> • at 60 Hz rated value 	24 ... 24 V
control supply voltage frequency	
<ul style="list-style-type: none"> • 1 rated value 	50 Hz
<ul style="list-style-type: none"> • 2 rated value 	60 Hz
control supply voltage at DC rated value	
<ul style="list-style-type: none"> • 	24 V
<ul style="list-style-type: none"> • 	24 ... 24 V
operating range factor control supply voltage rated value of magnet coil at DC	
<ul style="list-style-type: none"> • initial value 	0.85
<ul style="list-style-type: none"> • full-scale value 	1.2
operating range factor control supply voltage rated value of magnet coil at AC	
<ul style="list-style-type: none"> • at 50 Hz 	0.85 ... 1.1
<ul style="list-style-type: none"> • at 60 Hz 	0.85 ... 1.1
recovery time after power failure typical	0.09 s
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting
height	100 mm
width	22.5 mm
depth	121.6 mm
required spacing	

- for grounded parts at the side

5 mm

Connections/ Terminals

type of electrical connection	spring-loaded terminal (push-in)
type of connectable conductor cross-sections	
• solid	1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 1.5 mm ²)
• finely stranded with core end processing	1x (0.5 ... 1.0 mm ²), 2x (0.5 ... 1.0 mm ²)
• finely stranded without core end processing	1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 1.5 mm ²)
• for AWG cables solid	1x (20 ... 16), 2x (20 ... 16)
• for AWG cables stranded	1x (20 ... 16), 2x (20 ... 16)
type of electrical connection plug-in socket	No

Approvals Certificates

General Product Approval



[Confirmation](#)



EMV	Functional Safety	Test Certificates	Marine / Shipping
-----	-------------------	-------------------	-------------------



[Type Examination Certificate](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping	other	Railway	Environment
-------------------	-------	---------	-------------



[Confirmation](#)

[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SK1111-2AB30>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SK1111-2AB30>




Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SK1111-2AB30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SK1111-2AB30&lang=en

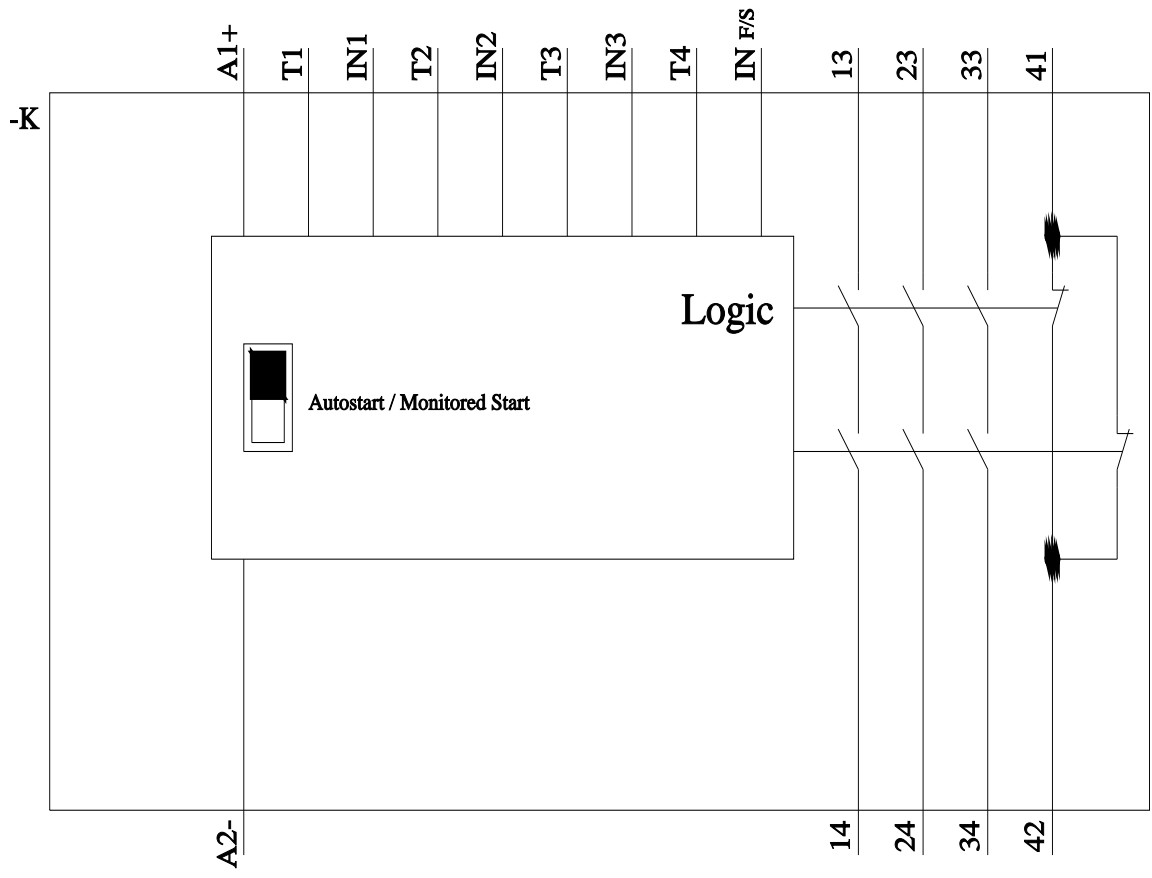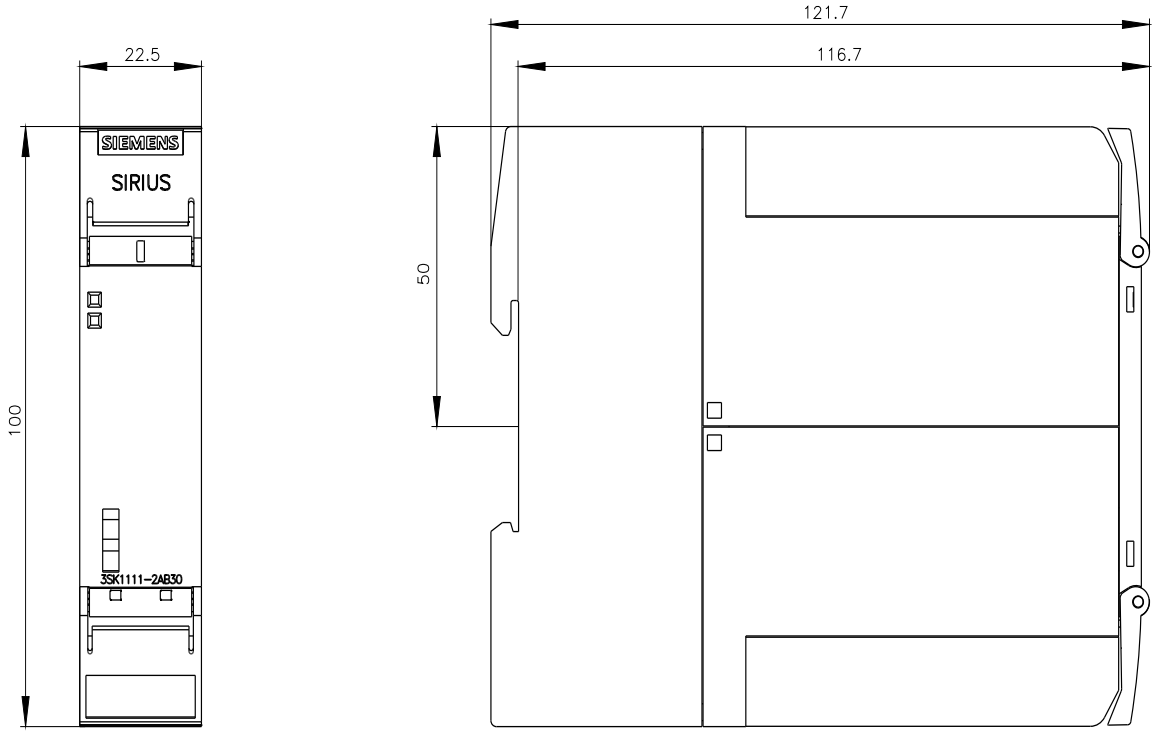

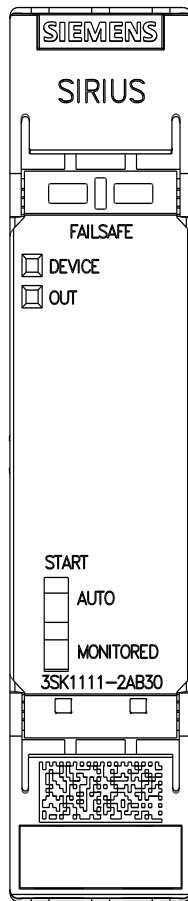

last modified:

3/11/2024