

Specifications:

规格:




- 1.Voltage rating:250VAC/DC
额定电压: 250V AC/DC
 - 2.Current rating:1A AC/DC
额定电流: 1A AC/DC
 - 3.Withstanding voltage:500V AC/minute
耐受电压: ≥500V AC/分钟
 - 4.Temperature range:-40℃-+105℃
温度范围: -40℃-+105℃
 - 5.Insulation resistance:1000MΩMIN
绝缘电阻: ≥1000MΩ
 - 6.Contact resistance:20mΩMax
接触电阻: ≥20mΩ
- Material:
材料:
- 7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0
 - 8.The iron shell:SPCC Nivkel Plating/Tin
铁壳: SPCC,镀镍/镀锡
- B、成品不能有弯针, R角不一致等不良。

X08 XX F X X X 1
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series N0.
② Row No.Pin No.XX-09;15;25;37
③ Welding Board Angle :F-Female
④ T: Tradutional C: Car-pin
⑤ Planting Catogtry: 1:1U 2:2U 3:3U 4:4U 5:5U 6:6U 7:7AuSn
⑥ Color:B-BLACK W-White BL-Blue
⑦ 1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4; 5:TYPE-5

NUMBER OF POSITIONS	DIMENSION				
	A±0.40	B±0.30	C±0.30	D±0.25	E±0.25
9	30.80	25.00	16.35	11.08	10.16
15	39.14	33.30	24.75	19.39	17.78
25	53.05	47.04	38.35	33.24	30.38
37	69.32	63.50	54.75	49.86	45.72

X08XXFXXX1	XDBLS	XDBLM
PART NO	SCREW	NUT

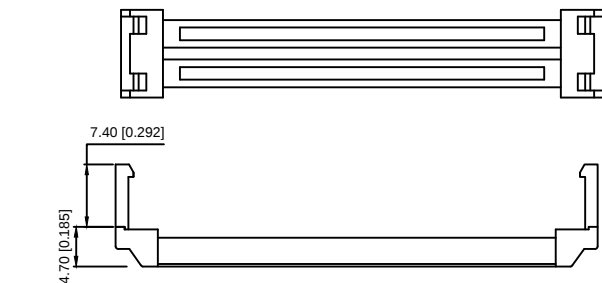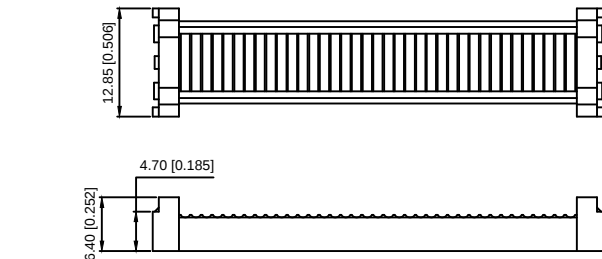

							DSND		SCALE: N/A	MODEL TYPE: D-USB			
					ANGLAR	±5°		DWN		VIEW: 	PART NO.: X08XXFXXX1		
Δx					L≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.: X-X08XXFXXX1		
Δx					4<L≤ 16	±0.3		APPD		SIZE: A4			
Δx					16<L≤ 63	±0.4							
MARK	DESCRIPTION			DATE	REVISED	APPROVED							
REVISIONS													
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn							UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				
											WEIGHT	SHEET	REVISION
												1/1	A0

XKLB