

SAMZO REAC/ROHS

REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2018.06.14






Specification

Rated Voltage(Max.): 30V AC/DC
 Dielectric Strength: 1KV AC For 1 Minute
 Between Adjacent Terminal, No Breakdown
 Insulation Resistance: 1000 Megohms Min. 500V
 DC For 1 Minute Between Adjacent Terminal
 Operating Temperature: -20° C-80° C


23 E 4 1 * 0 5 0
 (A) (B) (C) (D) (E) (F) (G) (H)

- A. Series: 23: 2.0 - 55 series
- B. Spring contact pitch: E - 2.0mm
- C. Fixing method: 4 - Horizontal Mounting
- D. Product height: 1 - H2.6mm
- E. PIN NO: 2-2P/3-3P/5-5P/7-7P/9-9P/0-10PIN
- F. Main body material: 0 - LCP
- G. Spring contact material: 5 - COPPER ALLOY
- H. Mold code: 0 - convention

23E41-0-050	22.00	18.00	21.40
23E41-9-050	20.00	16.00	19.40
23E41-8-050	18.00	14.00	17.40
23E41-7-050	16.00	12.00	15.40
23E41-6-050	14.00	10.00	13.40
23E41-5-050	12.00	8.00	11.40
23E41-4-050	10.00	6.00	9.40
23E41-3-050	8.00	4.00	7.40
23E41-2-050	6.00	2.00	5.40
Be filled	DIMA	DIMB	DIMC

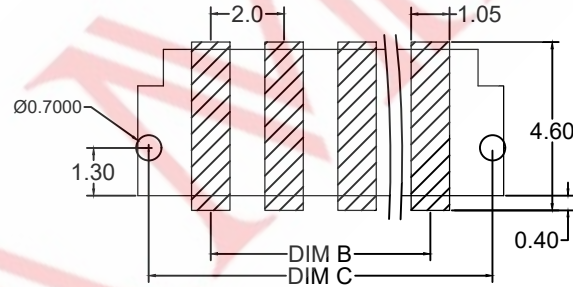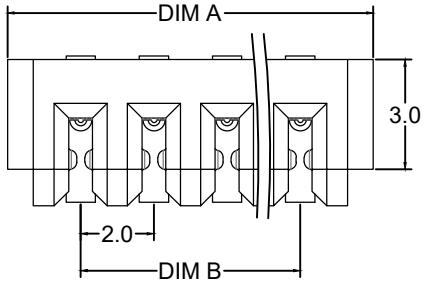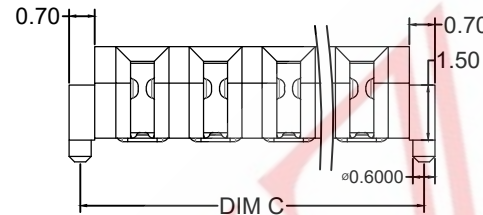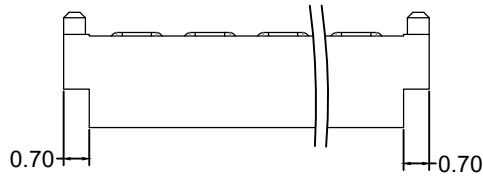

RECOMMENDED PCB LAYOUT
TOL:(±0.05)

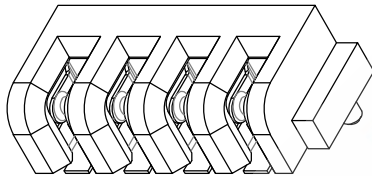

ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR					
B	塑胶	LCP	1	黑色	CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	±0.15
A	触点	铜合金	1	镀金	APPROVED	LILIANJIANG	2018.06.14	≥2~5<	±0.25
								≥0~2<	±0.15
								≥5	±0.35

FIRST VIEW

SCALE 1:1 UNIT mm

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM

TITLE: 卧贴刀片电池母座H2.6MM
DWG NO: 23E41-P001
PART NO: 23E4155D003
MODEL NO: 23E41-* -050
NAME: DC CONN

SAMZO COMPONENTS
Electronic switch and connector manufacturer