

OJ-SH-124LMH,000

✓ ACTIVE

OEG | OEG Miniature PCB Relay OJ/OJE

TE Internal #: 1461247-3

General Purpose Power Relay, Monostable, .2 W Coil, 2880 ohm


Coil Resistance, UL Coil Insulation Class E, OEG Miniature PCB

Relay OJ/OJE, Power Relays

[View on TE.com >](#)



Relays & Contactors > Relays > Power Relays > STD OEG Miniature PCB OJ/OJE Pow Relays

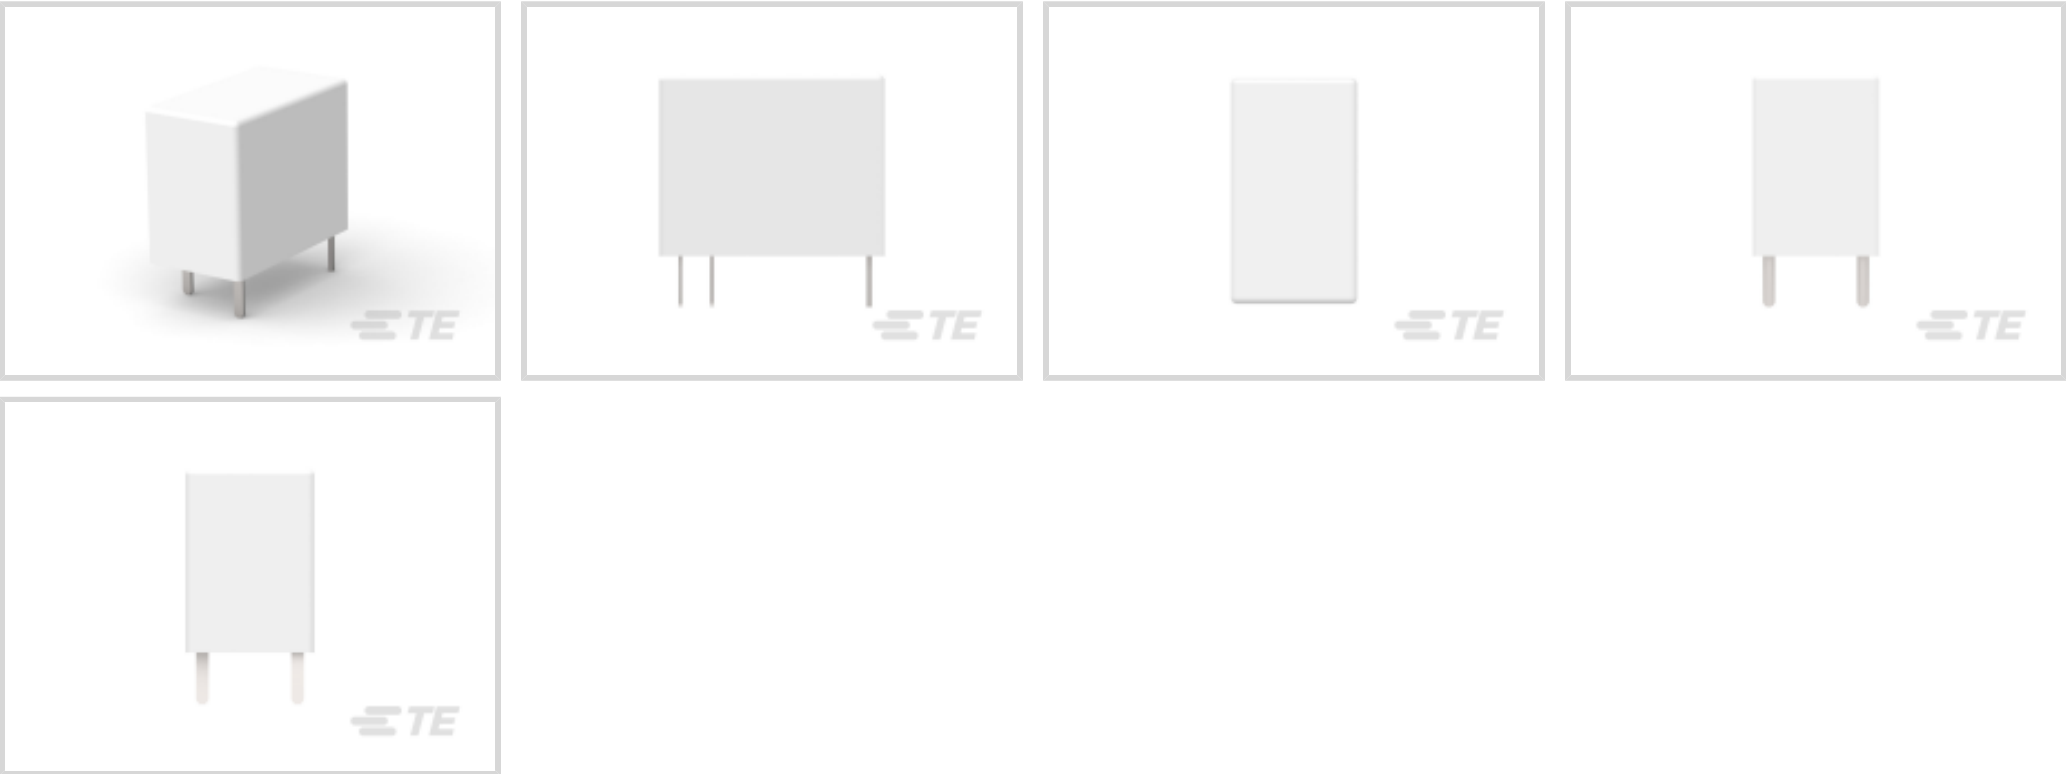

Relay Type: **General Purpose Power Relay**  
Coil Magnetic System: **Monostable**  
Coil Power Rating DC: **.2 W**  
Coil Resistance: **2880 Ω**  
Coil Special Features: **UL Coil Insulation Class E**

[All STD OEG Miniature PCB OJ/OJE Pow Relays \(65\)](#)

Features

Product Type Features

Relay Type	General Purpose Power Relay
------------	-----------------------------

Configuration Features

Coil Special Features	UL Coil Insulation Class E
Contact Arrangement	1 Form A SPST-NO
Contact Number of Poles	1

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	750 Vrms
Contact Limiting Making Current	8 A
Contact Limiting Short-Time Current	8 A
Contact Limiting Continuous Current	8 A
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Contact Limiting Breaking Current	8 A



Coil Power Rating DC	.2 W
Coil Resistance	2880 Ω
Coil Voltage Rating	24 VDC
Contact Current Rating	8 A
Contact Switching Load (Min)	100mA @ 5V
Contact Switching Voltage (Max)	30 VDC
Contact Voltage Rating	30 VDC

Body Features

Product Weight	9 g[.318 oz]
----------------	--------------

Contact Features

Contact Material	AgCdO
------------------	-------

Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	Solder Pins

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Dimensions

Insulation Clearance Between Contact & Coil	7.7 mm[.303 in]
Insulation Creepage Between Contact & Coil	9.4 mm[.37 in]
Product Width	10.2 mm[.401 in]
Product Length	18.2 mm[.716 in]
Product Height	14.7 mm[.578 in]

Usage Conditions

Environmental Category of Protection	RTIII
Environmental Ambient Temperature (Max)	70 °C[158 °F]

Operation/Application

Current Type	DC
Coil Magnetic System	Monostable

Packaging Features

Packaging Method	Box & Tray, Tray
------------------	------------------

Other

--	--



Length Class (Mechanical)	16 – 20 mm
Environmental Ambient Temperature Class	50 – 70 °C
Height Class (Mechanical)	14 – 15 mm
Coil Power Rating Class	.15 – .2 W
Width Class (Mechanical)	10 – 12 mm
Contact Current Class	16 A

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Cadmium oxide (4.75% in Component Part) <b>Article Safe Usage Statements:</b> Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-OE4-OJ1  
STD OEG Miniature PCB OJ/OJE Pow Relays

Also in the Series | OEG Miniature PCB Relay OJ/OJE



Power Relays(67)

Customers Also Bought



TE Part #6609048-1  
3EQ1=F7258 S0



TE Part #3-1461491-0  
PCN-105D3MHZ,000



TE Part #1-604771-9  
CABLE TIE, 4" L, NATURAL, 100PK



TE Part #1-350943-0  
03P UMNL HDR ASSY R/A 94VO



TE Part #350759-4  
02P UMNL HDR ASSY PC V2 NATL




TE Part #1676309-2  
RN 0805 348R 0.1% 10PPM 1KRL



TE Part #7-2176397-9  
3502 1K8 1%



TE Part #2-2176337-7  
CRGCQ 0402 1K5 1%

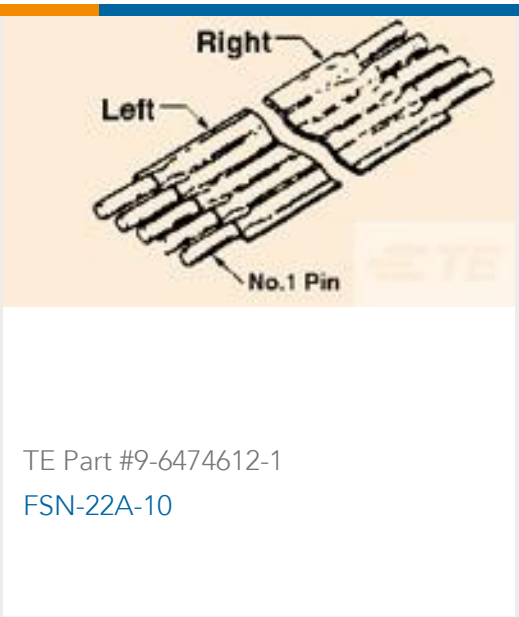

TE Part #9-6474612-1  
FSN-22A-10



Documents

Product Drawings

OJ-SH-124LMH,000

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1461247-3\_C3.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1461247-3\_C3.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1461247-3\_C3.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

OJ\_OJE Series Relay Data Sheet English

English

Product Specifications

OJ-SH-124LMH,000 095 Spec Sheet

Japanese

Definitions General Purpose Relays

English

Agency Approvals

VDE Certificate

English